



**SUMMARY TEST DATA  
ON  
P5T-0R5G18G-60-T-SFF**

PL23673/1840

Customer: \_\_\_\_\_ Tested By: E. Kretz  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: P5T-0R5G18G-60-T-SFF Date: 10/15/18  
Serial No: PL23673/1840 Drawing No: 27622883 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	12.0 TO 18.0 GHz	12.0 TO 18.0 GHz	PMI QA 1
2	Insertion Loss	4 dB Max	3.78 dB (See Plot)	
3	VSWR	2.0:1 Max	1.99:1 (See Plot)	
4	Isolation	60 dB Min	64 dB (See Plot)	
5	Switching Speed	100 ns Max	66 ns (See Typical Characteristics)	
6	Input Power	+20 dBm CW	Pass	
7	DC Supply	+5VDC @ 250 mA Typ -12VDC @ 100 mA Typ	+5VDC @ 140 mA -12VDC @ 23 mA	
8	Control Signal	TTL LOGIC "0" = LOW LOSS TTL LOGIC "1" = ISOLATION E1 CONTROLS J1-J2 E2 CONTROLS J1-J3 E3 CONTROLS J1-J4 E4 CONTROLS J1-J5 E5 CONTROLS J1-J6	Pass	PMI QA 1

QA/QC Approval: \_\_\_\_\_

PMI  
QA 1

Date: \_\_\_\_\_


10/15/18



**SUMMARY TEST DATA  
ON  
P5T-0R5G18G-60-T-SFF**

PL23673/1840

**(J1-J2) Insertion Loss and Return Loss**

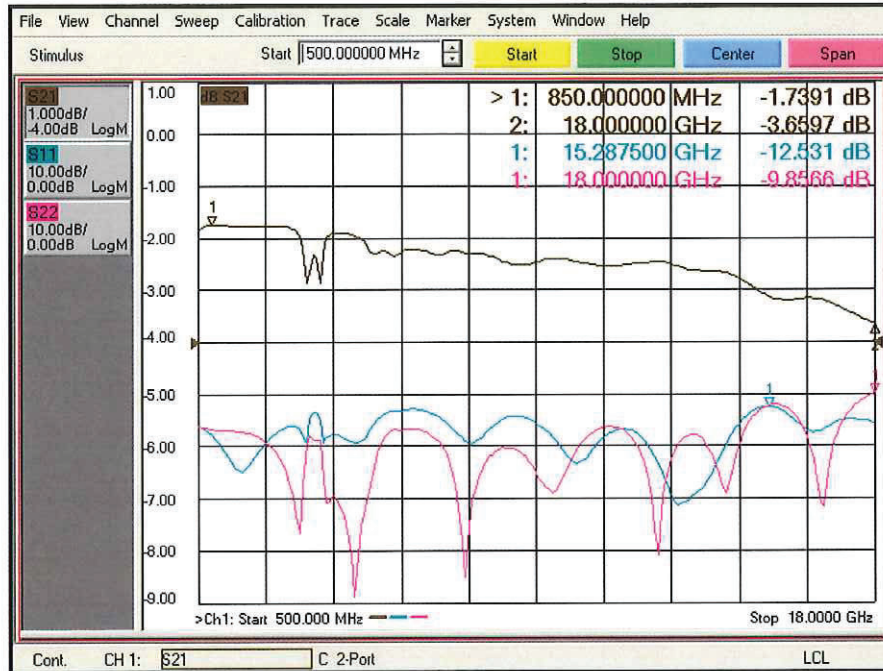

**(J1-J3) Insertion Loss and Return Loss**







**SUMMARY TEST DATA  
ON  
P5T-0R5G18G-60-T-SFF**

PL23673/1840

**(J1-J4) Insertion Loss and Return Loss**

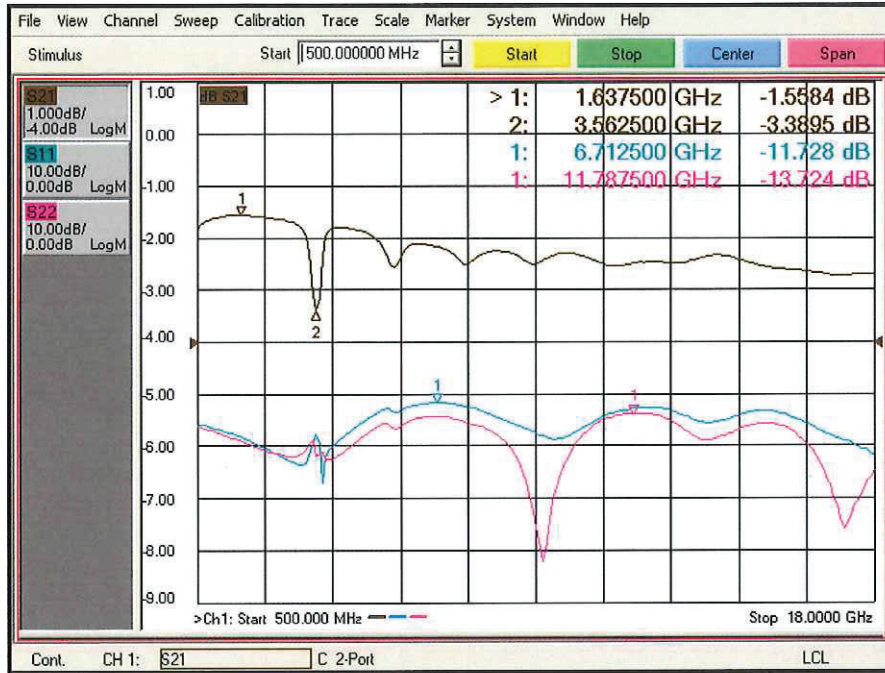

**(J1-J5) Insertion Loss and Return Loss**

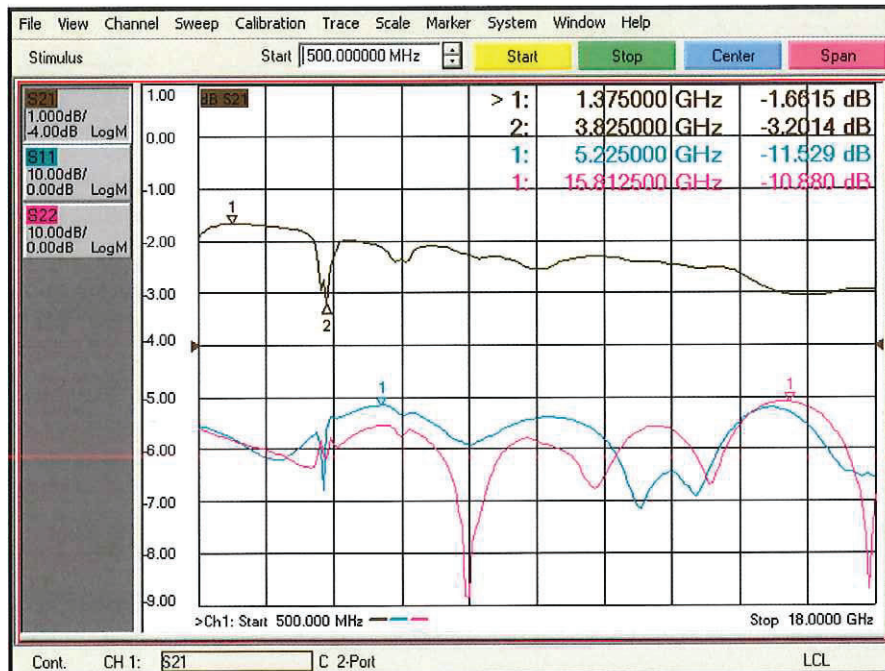





**SUMMARY TEST DATA  
ON  
P5T-0R5G18G-60-T-SFF**

PL23673/1840

**(J1-J6) Insertion Loss and Return Loss**

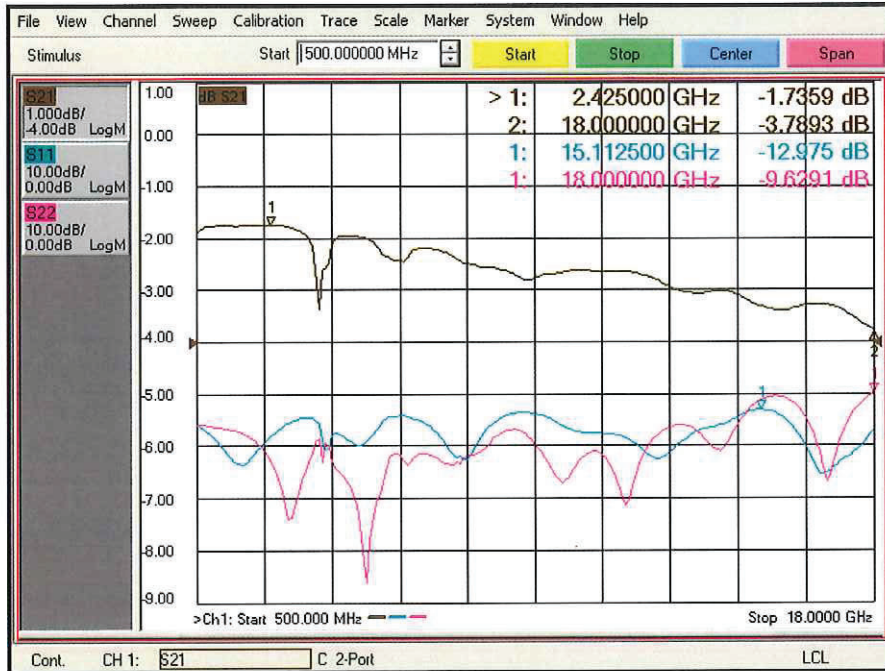

**(J1 - J2) Isolation and Return Loss**

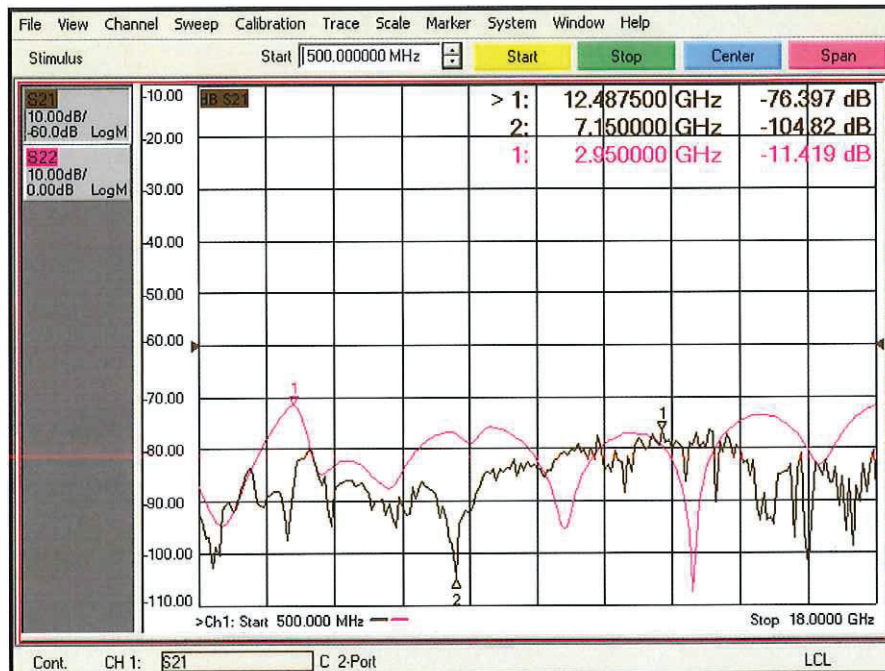




**SUMMARY TEST DATA  
ON  
P5T-0R5G18G-60-T-SFF**

PL23673/1840

**(J1 – J3) Isolation and Return Loss**

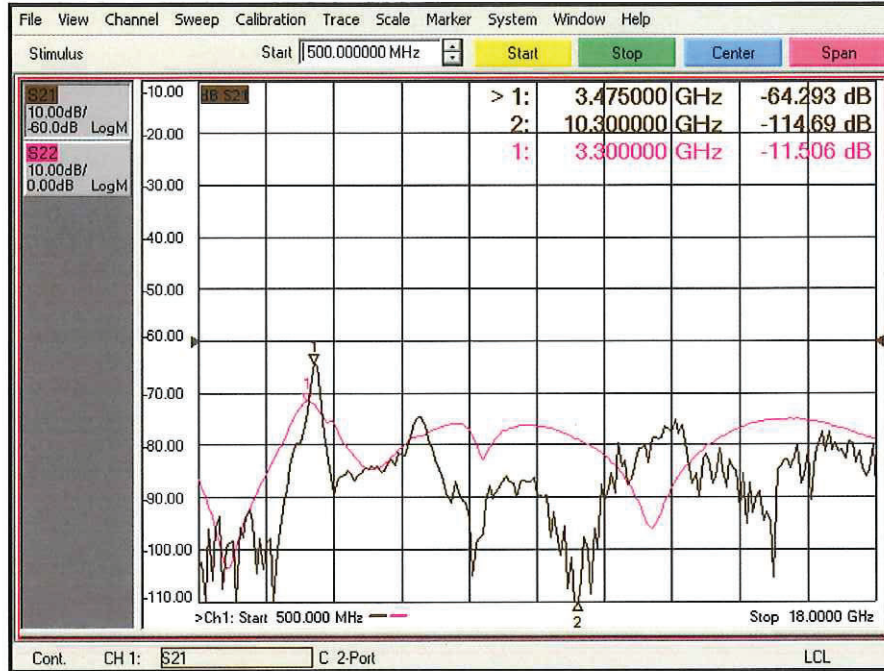

**(J1 – J4) Isolation and Return Loss**






**SUMMARY TEST DATA  
ON  
P5T-0R5G18G-60-T-SFF**

PL23673/1840

**(J1 – J5) Isolation and Return Loss**

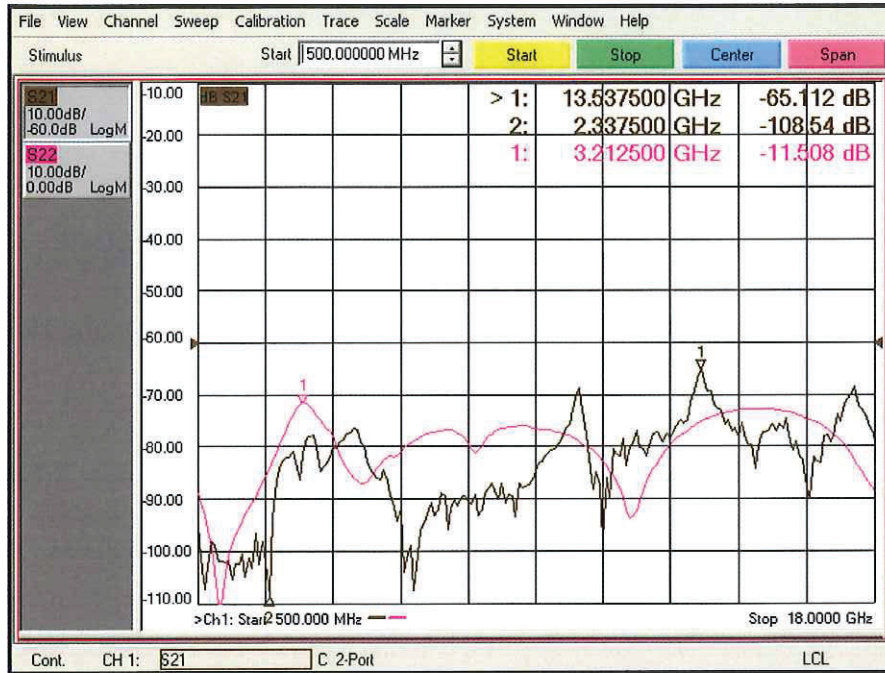

**(J1 – J6) Isolation and Return Loss**

