



**SUMMARY TEST DATA  
ON  
7CL9D66G-960-CD-SFF**

Customer: \_\_\_\_\_ Tested By: TS  
 SO No: \_\_\_\_\_ Temperature: +25°C  
 Model No: 7CL9D66G-960-CD-SFF Date: 03/03/2019  
 Serial No: PL24789/1906 Drawing No: 27609800 Rev: A1  
 Part No: \_\_\_\_\_


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC	
1	Center Frequency	9660 MHz Nom.	9665 MHz See Plot	PMI QA 1	
2	3 dB Pass band Bandwidth:	960 MHz Min.	978 MHz See Plot		
3	Pass band VSWR	1.5:1 Max	1.5:1 See Plot		
4	Passband Insertion Loss:	5 dB Max	4 dB See Plot		
5	Loss Ripple (peak-to-peak):	0.5 dB Max	< 0.5 dB See Plot		
6	Rejection 70 dB:	DC – 7800MHz 11940 MHz 13750 MHz	> 80 dB See Plot		
7	Rejection 50 dB:	14500 – 17000 MHz 8350 MHz	> 80 dB See Plot		
8	Input Power:	+30 dBm Max	+30 dBm See Plot		
9	Impedance (Source Load)	50 ohms Nom.	Pass		PMI QA 1

QA/QC Approval:  \_\_\_\_\_ Date: 3/4/19  
 PMI QA 1



**SUMMARY TEST DATA  
ON  
7CL9D66G-960-CD-SFF**

**Narrow-Band Response**

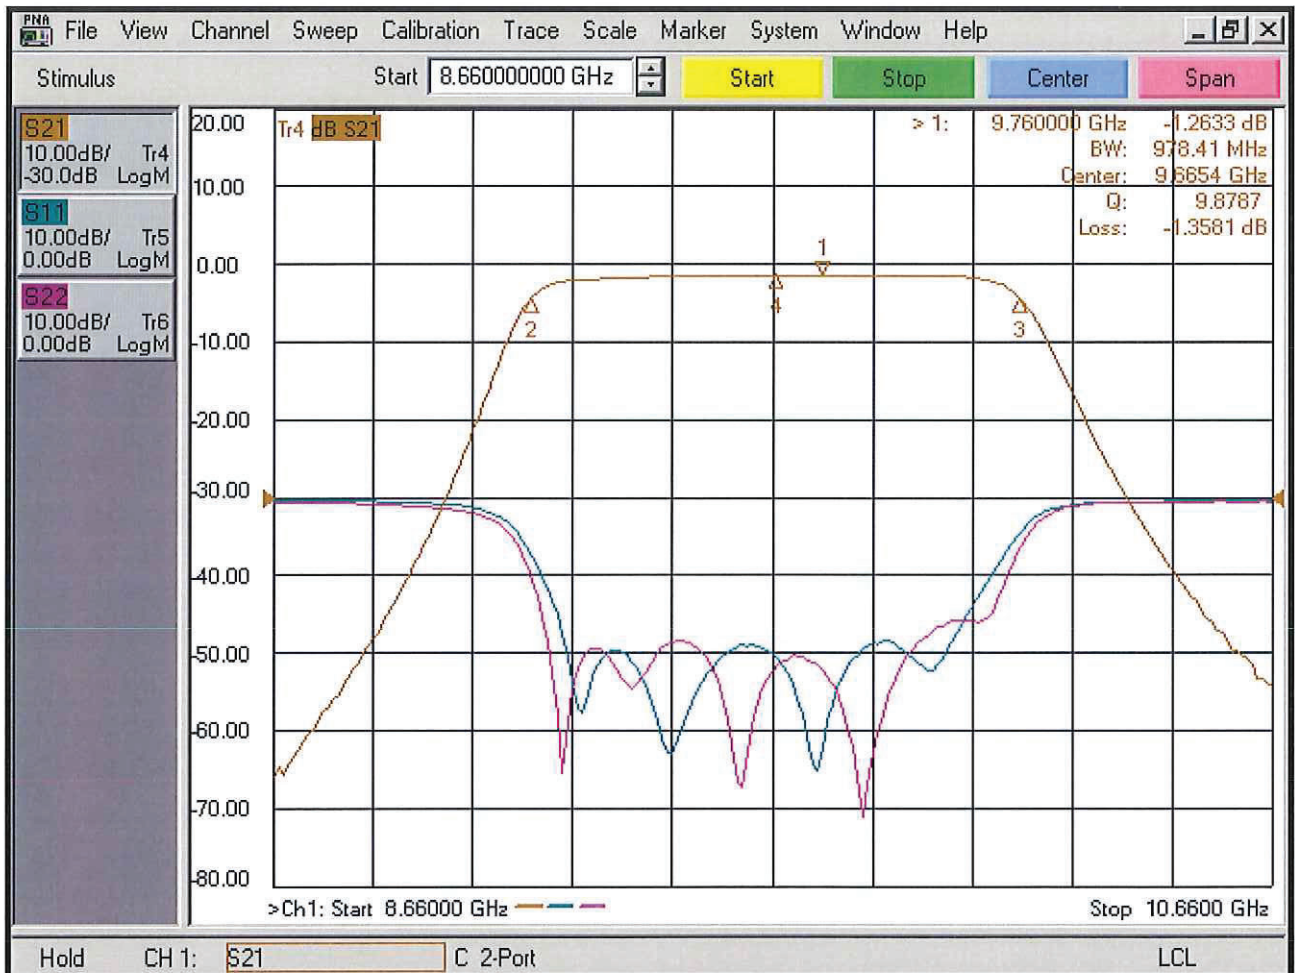



**SUMMARY TEST DATA  
ON  
7CL9D66G-960-CD-SFF**

**Wide-Band Response**

