



**SUMMARY TEST DATA
ON
7CL9D66G-960-CD-SFF**

Customer: _____	Tested By: <u>TS</u>	
SO No: _____	Temperature: <u>+25°C</u>	
Model No: <u>7CL9D66G-960-CD-SFF</u>	Date: <u>03/03/2019</u>	
Serial No: <u>PL24790/1906</u>	Drawing No: <u>27609800</u>	Rev: <u>A1</u>
Part No: _____		


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC	
1	Center Frequency	9660 MHz Nom.	9666 MHz See Plot	PMI QA 1	
2	3 dB Pass band Bandwidth:	960 MHz Min.	985 MHz See Plot		
3	Pass band VSWR	1.5:1 Max	1.5:1 See Plot		
4	Passband Insertion Loss:	5 dB Max	4 dB See Plot		
5	Loss Ripple (peak-to-peak):	0.5 dB Max	< 0.5 dB See Plot		
6	Rejection 70 dB:	DC – 7800MHz 11940 MHz 13750 MHz	> 75 dB See Plot		
7	Rejection 50 dB:	14500 – 17000 MHz 8350 MHz	> 80 dB See Plot		
8	Input Power:	+30 dBm Max	+30 dBm See Plot		
9	Impedance (Source Load)	50 ohms Nom.	Pass		PMI QA 1

QA/QC Approval: PMI QA 1 Date: 3/4/19



**SUMMARY TEST DATA
ON
7CL9D66G-960-CD-SFF**

Narrow-Band Response

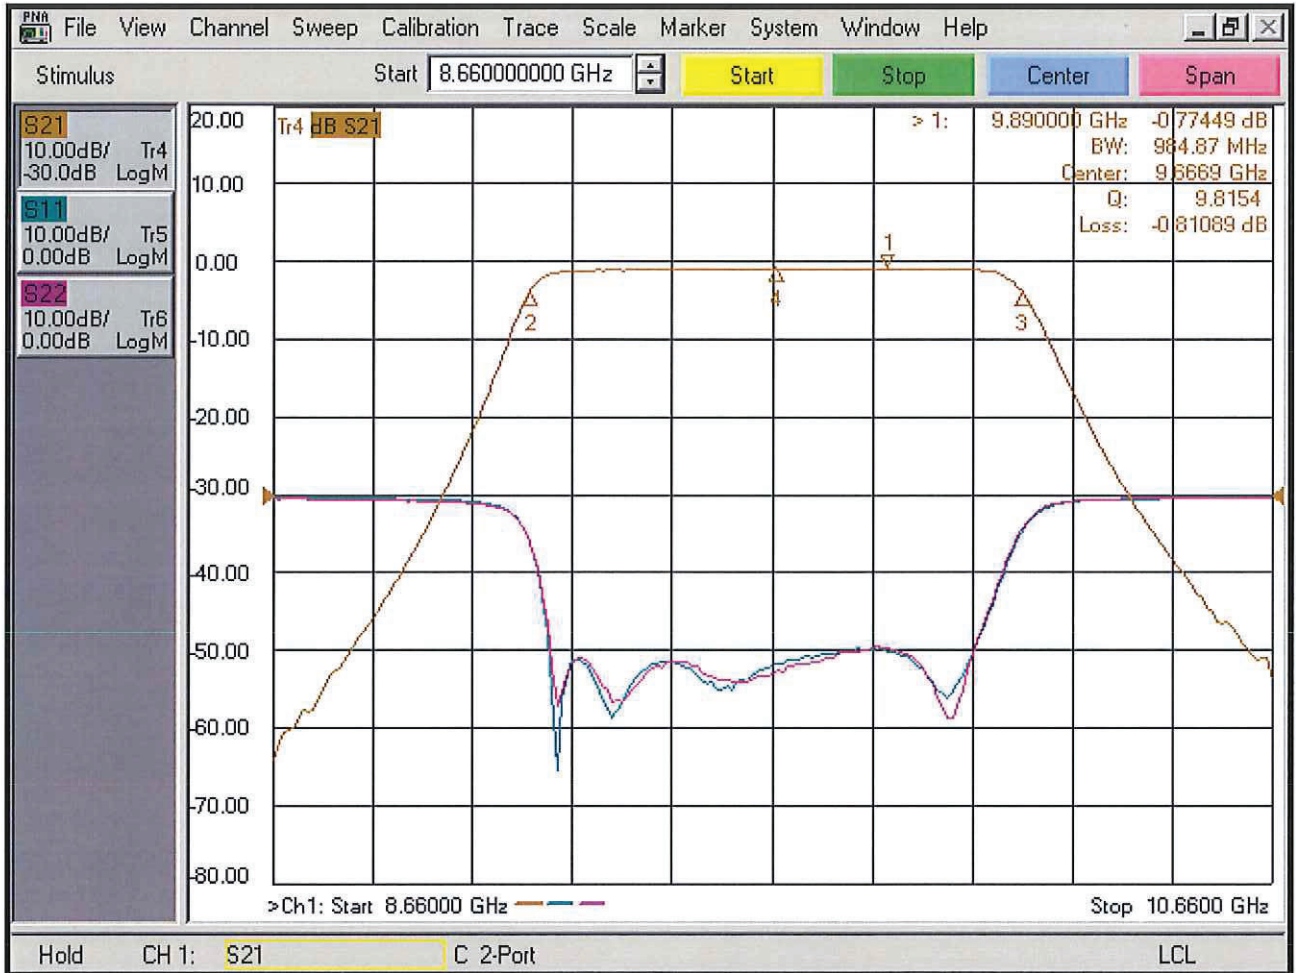



**SUMMARY TEST DATA
ON
7CL9D66G-960-CD-SFF**

Wide-Band Response

