



**SUMMARY TEST DATA
ON
GMTA-1002**

PL25186/1911

Customer: _____	Tested By: <u>Simon K.</u>	
SO No: _____	Temperature: <u>+25°C</u>	
Model No: <u>GMTA-1002</u>	Date: <u>03/15/19</u>	
Serial No: <u>PL25186/1911</u>	Drawing No: <u>27619821</u>	Rev: <u>A4</u>

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2 GHz to 18 GHz	2 GHz to 18 GHz See Plot	PMI QA 2
2	Input Operating Range:	-18 to -23 dBm (2-18 GHz)	-18 to -23 dBm	
3	Input VSWR:	2.5 : 1 @ Pin = -10 dBm	2.39:1 See Plot	
4	Threshold Level:	Pin = -18 to -23 dBm @ 25°C	Max.= -19.3 dBm Min.= -21.7 dBm	
5	Threshold Setting Stability:	±3.0 dB Max (Over Temp and Frequency)	± 1.20 dB	
6	Maximum Input Power:	+10 dBm (Without Damage)	Pass	
7	Detected Output:	TLL High (1) – On TLL Low (0) – Off	Pass	
8	Response Time:	100µs Max	11us	
9	DC Supply:	+12VDC @ 50mA	+12VDC @ 41.3 mA	PMI QA 2



**SUMMARY TEST DATA
ON
GMTA-1002**

PL25186/1911

THRESHOLD SETTING STABILITY
± 3 dB max OVER FREQUENCY @ TEMPERATURE

FREQ.	2 GHz	4 GHz	6 GHz	8 GHz	10 GHz	12 GHz	14 GHz	16 GHz	18 GHz
Pin @ 25 ° C	-20.8	-20.9	-20.4	-19.7	-19.3	-19.6	-19.9	-20.2	-21.7
Pin @ 0 ° C	-20.9	-21.0	-20.4	-19.7	-19.4	-19.8	-19.9	-20.3	-21.9
Pin @ 85 ° C	-20.6	-20.7	-20.2	-19.5	-19.1	-19.3	-19.6	-20.0	-21.4

QA/QC Approval:

J. Ireland

PMI
QA 2

Date:

3/20/19




**SUMMARY TEST DATA
ON
GMTA-1002**

PL25186/1911

Model Number: GMTA-1002
Serial Number: PL25186

Temperature: +25C

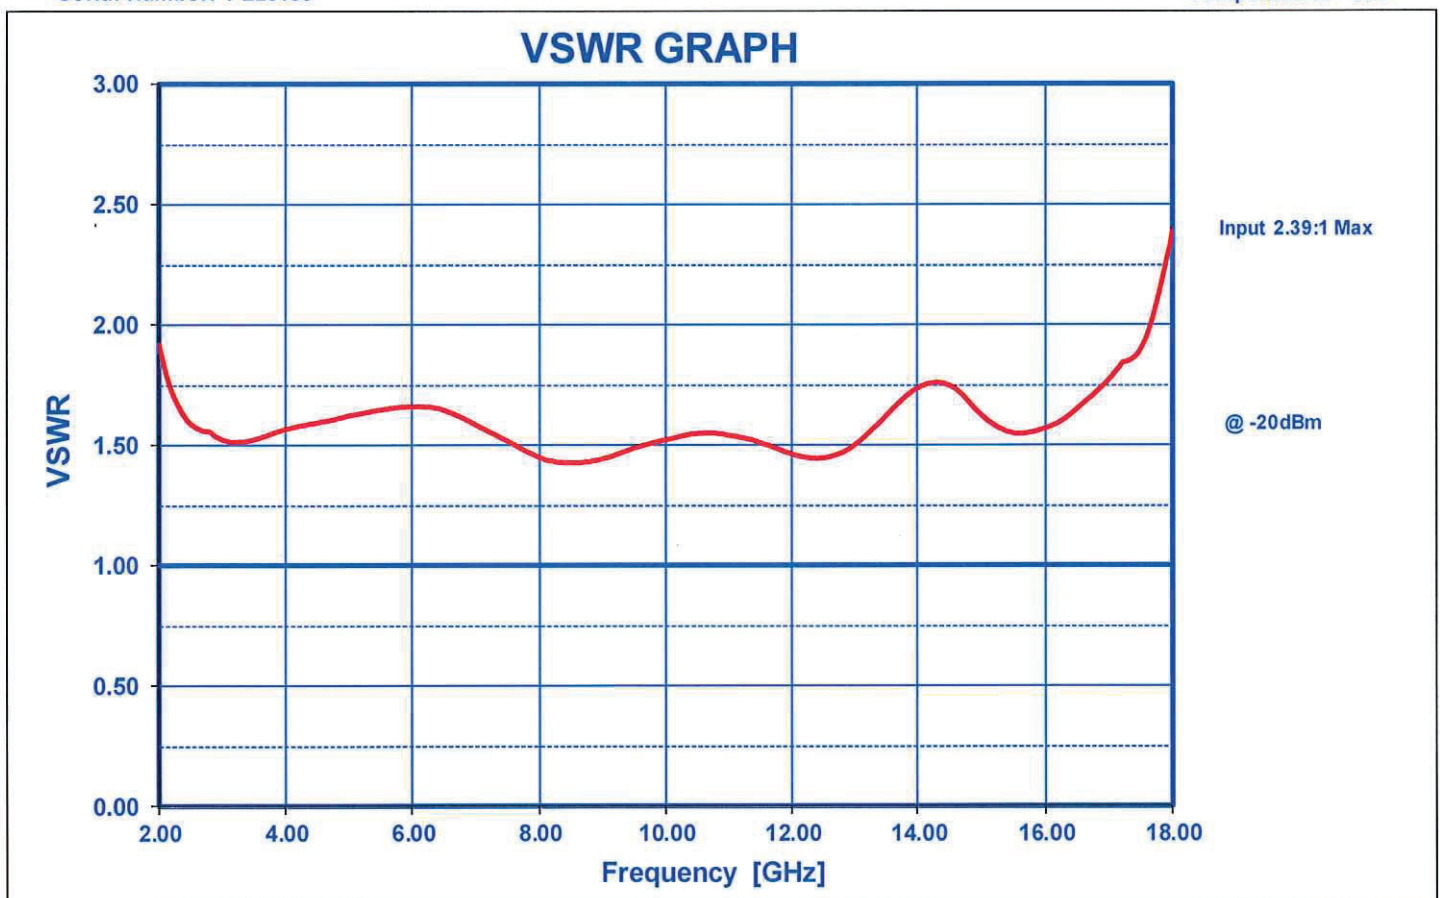

4921 Robert J. Mathews Pkwy Suite 1, El Dorado Hills, CA 95762 USA Tel: (916) 542-1401 Fax: (916) 265-2597
Email: sales@pmi-rf.com