



**SUMMARY TEST DATA
ON
P1T-DC40G-65-T-292FF-1NS**

PL25286/1913

Customer: _____ Tested By: L. McGraw
SO No: _____ Temperature: +25°C
Model No: P1T-DC40G-65-T-292FF-1NS Date: 03/28/19
Serial No: PL25286/1913 Drawing No: 27621866 Rev: A2

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	DC to 40GHz	DC to 40GHz See Plot	PMI QA 1
2	Isolation:	65dB Typ, 55dB Min	62dB See Plot	
3	Insertion Loss:	5.5dB Typ, 6.8dB Max	5.8dB See Plot	
4	VSWR In/Out:	2.0:1 Typ, 2.2:1 Max	2.1:1 See Plot	
5	Input Power:	+17dBm CW Max	Pass	
6	Switching Speed:	5ns Typ, 6ns Max	2.7ns See Typical Characteristics	
7	Rise/Fall Time:	0.9ns Typ, 1.0ns Max	0.6ns See Typical Characteristics	
8	Control Signal:	TTL "1" On	Pass	
9	DC Voltage:	+8 to +15V @ 15mA Max -8 to -15V @ 40mA Max	+8 to +15V @ 8mA -8 to -15V @ 27mA	PMI QA 1

QA/QC Approval:  PMI QA 1 Date: 3/28/19


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



SUMMARY TEST DATA ON P1T-DC40G-65-T-292FF-1NS

PL25286/1913

(J1-J2) Insertion Loss and Return Loss

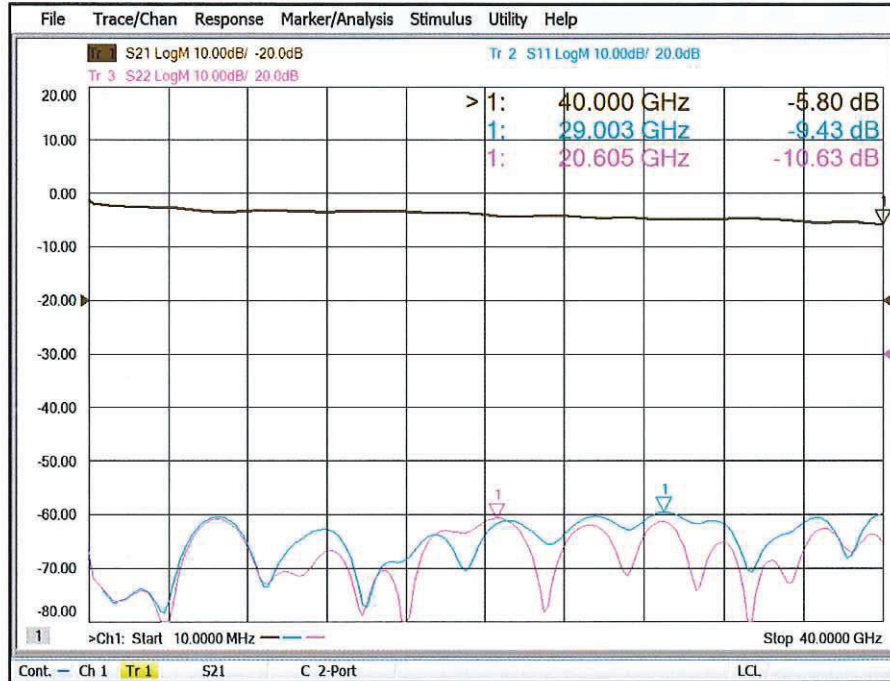

(J1 - J2) Isolation and Termination Return Loss

