



**SUMMARY TEST DATA
ON
P2T-500M18G-60-R-5-15-SFF**

PL25293/1913

Customer: _____	Tested By: <u>Jerry N.</u>
SO No: _____	Temperature: <u>+25°C</u>
Model No: <u>P2T-500M18G-60-R-15-SFF</u>	Date: <u>04/01/19</u>
Serial No: <u>PL25293/1913</u>	Drawing No: <u>27624523</u> Rev: <u>B1</u>

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	0.5 to 18.0 GHz	0.5 to 18.0 GHz See Plot	PMI QA1	
2	Isolation:	60 dB Min	80dB See Plot		
3	Insertion Loss:	2.2 dB Typ	2.0dB See Plot		
4	VSWR:	1.9 :1 Max	1.7:1 See Plot		
5	Operating Input Power:	4 Watts CW Max	Pass		
6	Switching Speed:	200 ns Max	40 ns See Plot		
9	Power Supply:	+5 VDC @ 150 mA -15 VDC @ 150 mA	24 mA 78 mA		
10	Control		Pass		PMI QA1

* NOT TO SPECIFIED VALUES

QA/QC Approval: PMI QA1 Date: 4/2/19




**SUMMARY TEST DATA
ON
P2T-500M18G-60-R-5-15-SFF**

PL25293/1913

(J1-J2) Insertion Loss and Return Loss



(J1-J2) Isolation and Termination Return Loss

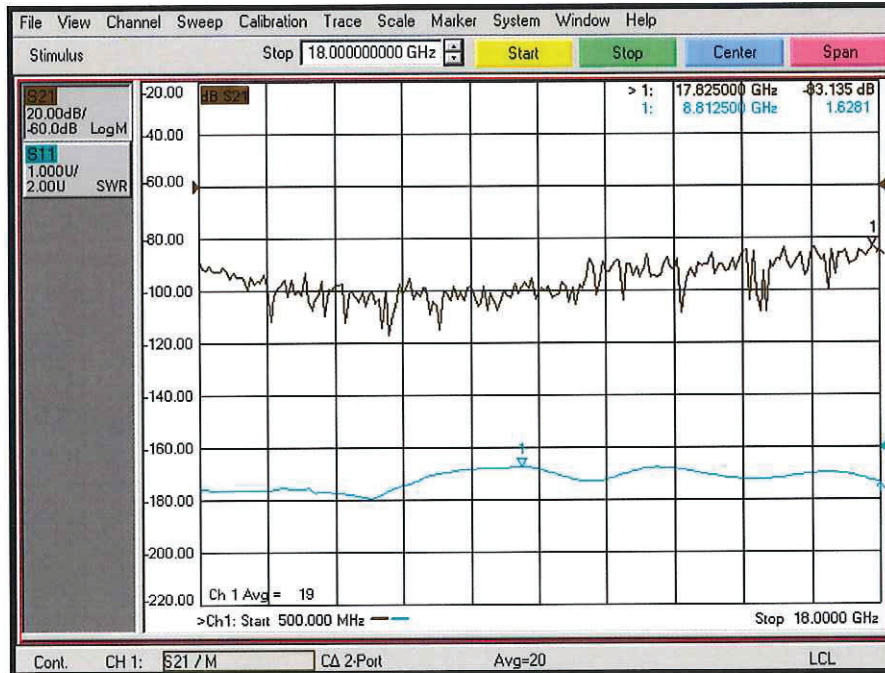




**SUMMARY TEST DATA
ON
P2T-500M18G-60-R-5-15-SFF**

PL25293/1913

(J1-J3) Insertion Loss and Return Loss

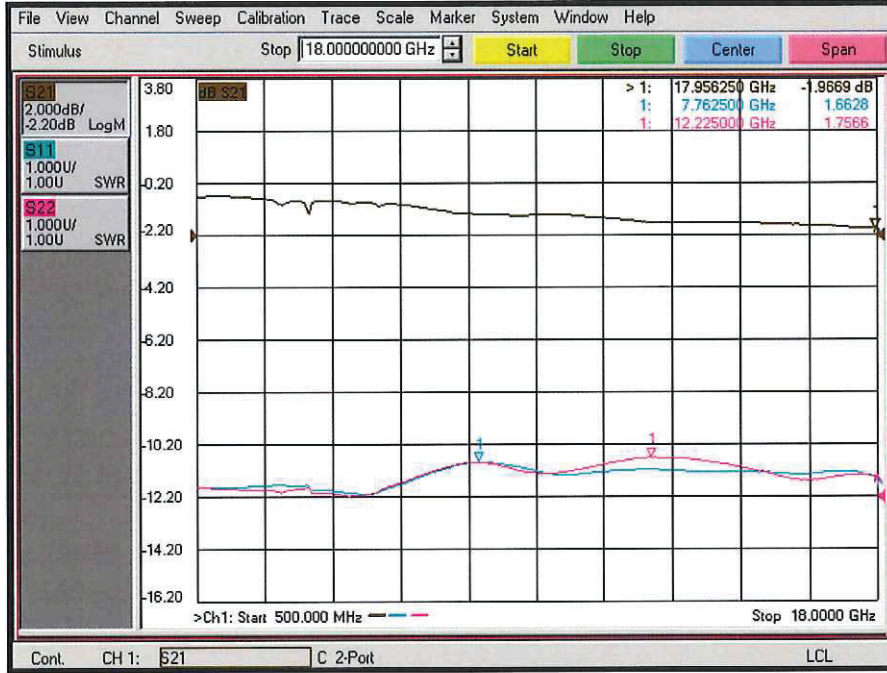

(J1-J3) Isolation and Termination Return Loss

