



**SUMMARY TEST DATA
ON
PE2-16-2R06R0-1R8-12-12-SFF**

Customer: _____
SO No: _____
Model No: PE2-16-2R06R0-1R8-12-12-SFF
Serial No: PL25868/1927

Tested By: JERRY WADE
Temperature: 25 Degrees C
Date: 7/1/2019
Drawing No: 27635320 REV: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC	
1	Frequency Range:	2.0 to 6.0 GHz	2.0 to 6.0 GHz	PMI QA1	
2	Gain:	+16 dB Typ.	17.1dB See Plot		
3	Gain Flatness:	±1.5 dB Max.	±0.61dB See Plot		
4	Noise Figure:	1.8 dB Typ.	1.64dB See Plot		
5	OP1dB:	+10 dBm Min.	16.02dB See Plot		
6	VSWR: (Input/Output)	2.0:1 Max.	1.79:1 / 1.29:1 See Plot		
7	DC Supply:	+12 V to +15 VDC @ 65 mA Max.	+12 V to +15 VDC @ 59mA		PMI QA1

QA/QC Approval:  PMI QA1 Date: 7/2/19


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



SUMMARY TEST DATA ON PE2-16-2R06R0-1R8-12-12-SFF

PL25868/1927

GAIN & VSWR

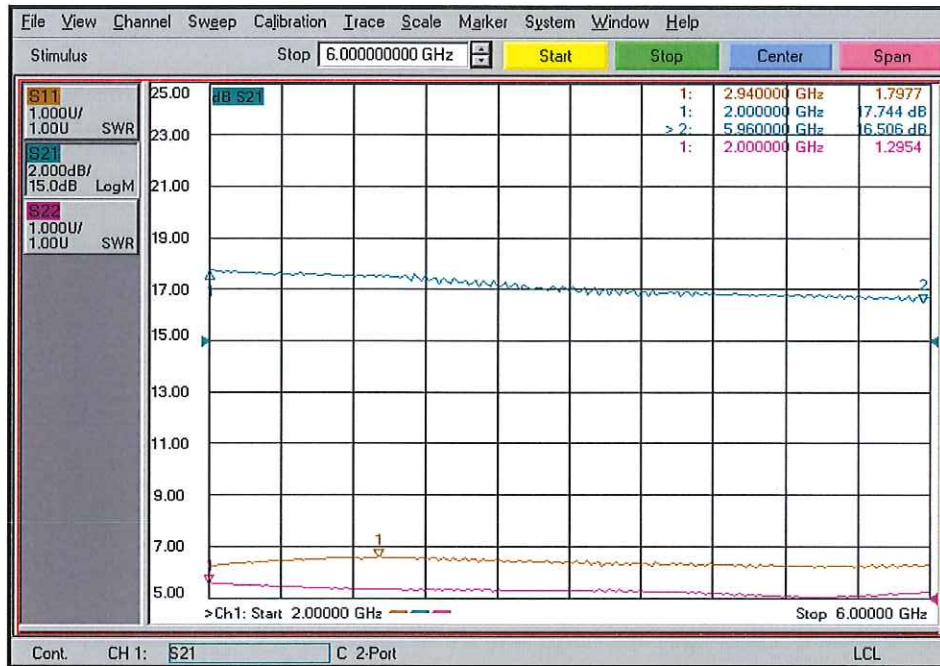




SUMMARY TEST DATA ON PE2-16-2R06R0-1R8-12-12-SFF

PL25868/1927

NOISE FIGURE

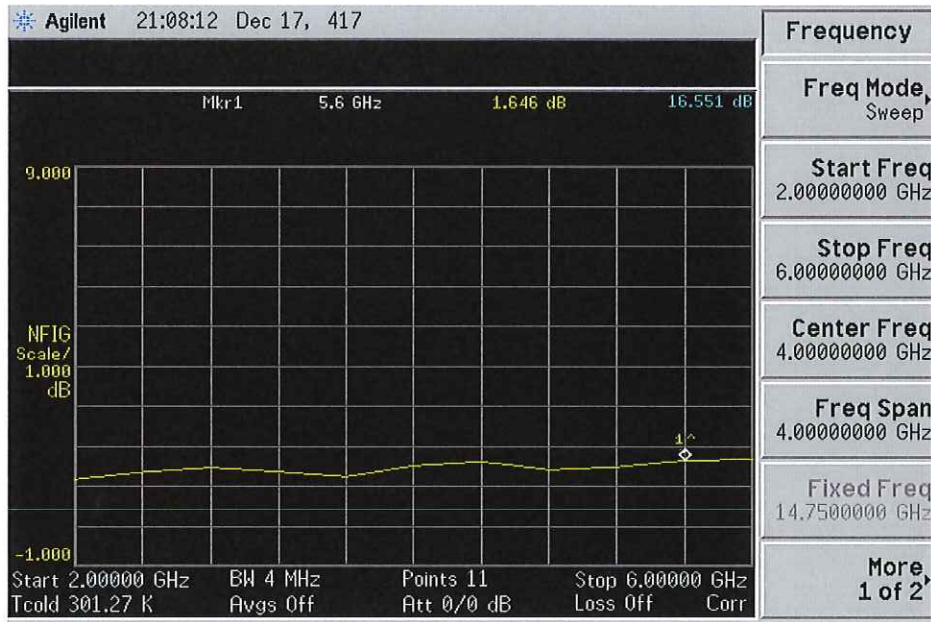



**SUMMARY TEST DATA
ON
PE2-16-2R06R0-1R8-12-12-SFF**

PL25868/1927

P-1db

