



**SUMMARY TEST DATA  
ON  
P1T-6G18G-60-T-SFF-1W**

PL26022/1931

Customer: _____	Tested By: <u>B. Willard</u>
SO No: _____	Temperature: <u>+25°C</u>
Model No: <u>P1T-6G18G-60-T-SFF-1W</u>	Date: <u>07/30/19</u>
Serial No: <u>PL26022/1931</u>	Drawing No: <u>27628521</u> Rev: <u>A1</u>

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	6.0 to 18.0 GHz	6.0 to 18.0 GHz	PMI QA 1	
2	Insertion Loss:	2.75dB Max	2.64 dB (See Plot)		
3	Isolation:	65dB Min	84.56 dB (See Plot)		
4	VSWR:	2.0:1 Max (1.5:1 Goal)	1.97:1		
5	Switching Speed:	25ns Typ	<25ns See Typical Characteristics		
6	Operating Power:	+30dBm Max	+30dBm See Typical Characteristics		
7	Control	TTL Logic "0" = Insertion Loss "1" = Isolation	Pass		
8	Power Supply:	+5VDC @ 50mA Max -15VDC @ 75mA Max	34mA 67mA		PMI QA 1


QA/QC Approval:  PMI QA 1 Date: 7/31/19



# SUMMARY TEST DATA ON P1T-6G18G-60-T-SFF-1W

PL26022/1931

## (J1-J2) Insertion Loss and Return Loss

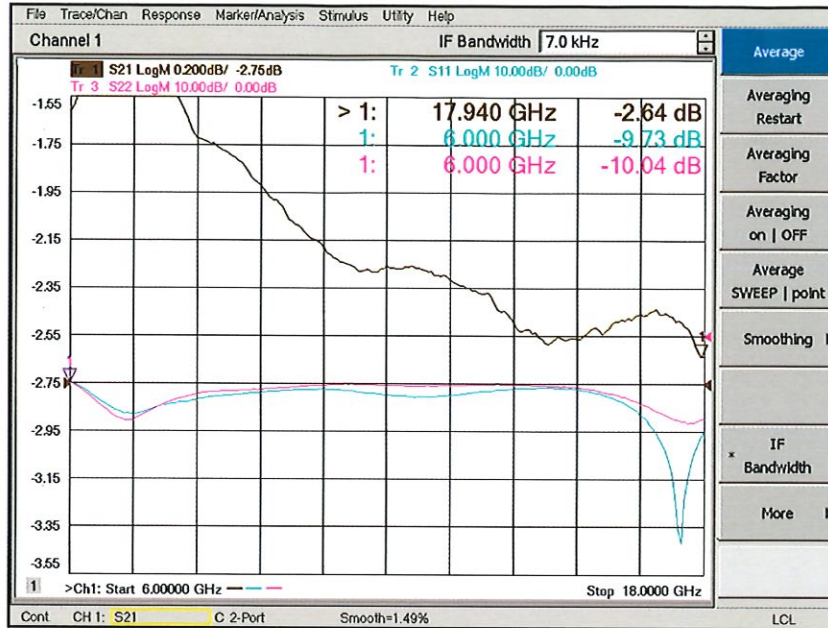

## (J1 - J2) Isolation and Termination Return Loss

