






**SUMMARY TEST DATA**  
**ON**  
**P1T-6G18G-60-T-SFF-1W**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P1T-6G18G-60-T-SFF-1W  
 Serial No: PL26517/1937

Tested By: K Craven  
 Temperature: 25°C  
 Date: 12/6/2023  
 Drawing No: 27628521     Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	6 GHz to 18 GHz	6 GHz to 18 GHz	PMI QA2
2	Insertion Loss	2.75 dB Max.	2.4 dB	
3	Isolation	65 dB Min.	74 dB	
4	VSWR: In/Out	2:1 Max. 1.5 Goal	1.62:1 In 1.67:1 Out	
5	Switching Speed	25 ns Typ. Ton = 50% ttl to 90% rf Toff = 50% ttl to 10% rf	Pass See Typical Characteristics	
6	Input Power	30 dBm CW Max.	Pass See Typical Characteristics	
7	Control Signal	TTL LOGIC '0' : Insertion Loss '1' : Isolation	Pass	
8	DC Supply	+5VDC @ 50 mA Max. -15VDC @ 75 mA Max.	+ VDC @ 40 mA - VDC @ 50 mA	

QA/QC Approval: \_\_\_\_\_ PMI QA2     Date: 12/7/2023

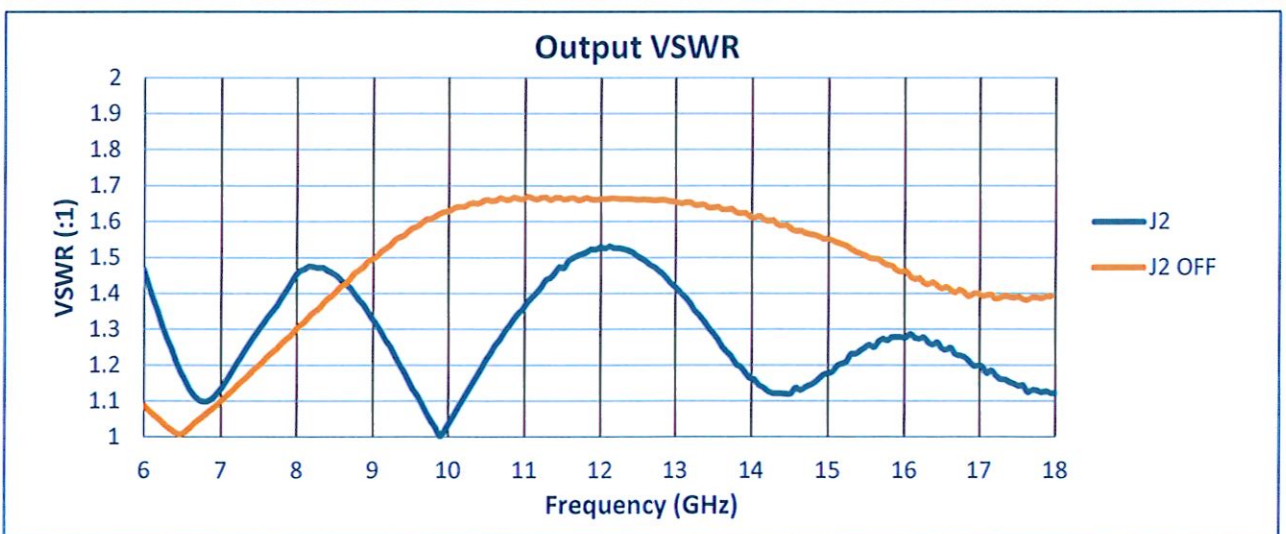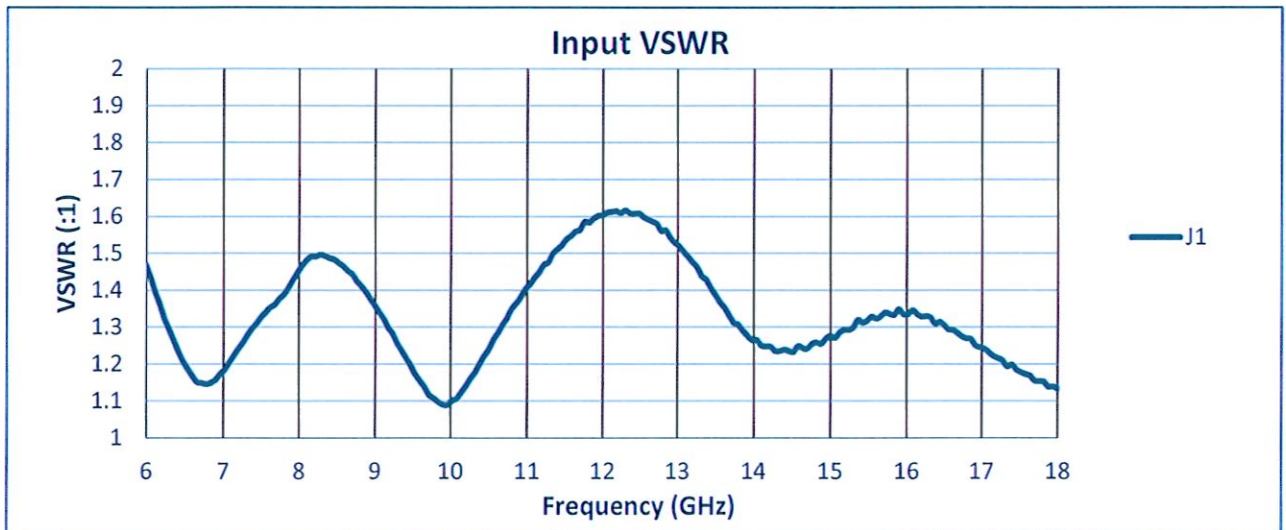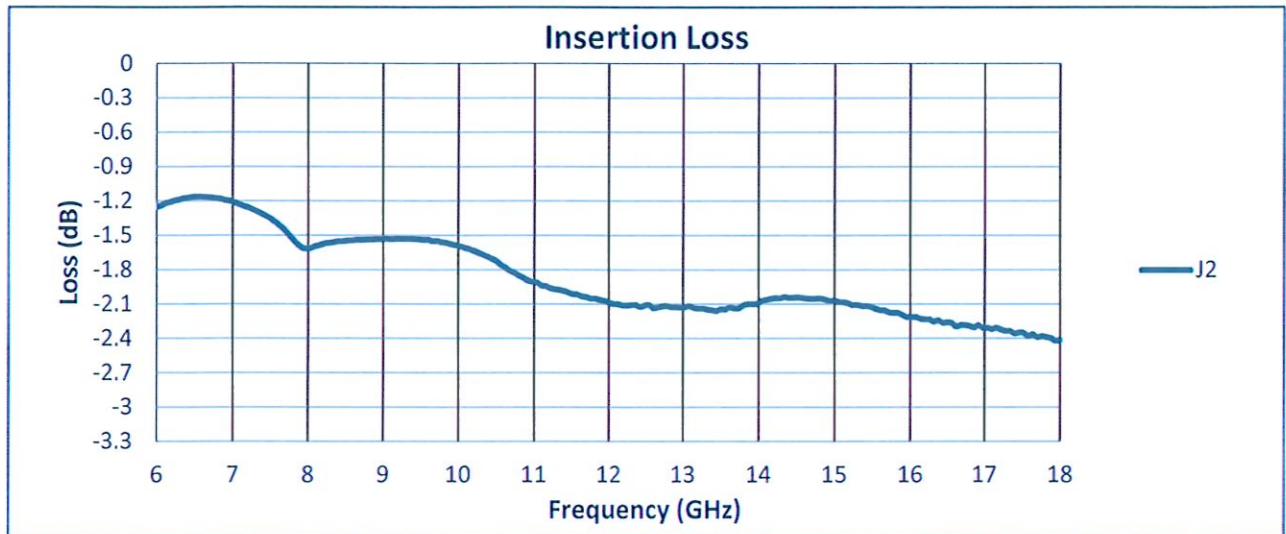

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@pmi-rf.com

