



**SUMMARY TEST DATA
ON
DD-20-218-5PF-1-N-FM-OPT0518**

PL27164/1947

Customer: _____	Tested By: <u>E.Benson</u>	
SO No: _____	Temperature: <u>+25°C</u>	
Model No: <u>DD-20-218-5PF-1-N-FM-OPT0518</u>	Date: <u>11/20/2019</u>	
Serial No: <u>PL27164/1947</u>	Drawing No: <u>27631046</u>	Rev: <u>A1</u>

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 18 GHz	0.5 to 18 GHz See Plot	PMI QA2
2	VSWR In/Out:	3.5:1 Typ. (Measured @ -23dBm with 27kOhm load impedance)	2.65:1 See Plot	
3	Frequency Flatness:	±1.5 dB, ±1.0 dB Typ.	± 0.53 dB See Plot	
4	Speed:	5 ns	Pass By design	
5	Voltage Sensitivity:	650 mV/mW, 700mV/mW Typ.	695 mV/mW Typ. See Plot	
6	Tangential Sensitivity:	-50dBm @ 2 MHz Video Bandwidth	<-50dBm @ 2MHz	
7	Video Capacitance:	5.6 pF	Pass	
8	Output Voltage:	Negative (Positive is Available)	Pass	
9	Max Input Power:	+17 dBm	Pass	PMI QA2

QA/QC Approval: **PMI
QA2** Date: 11/21/19


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
DD-20-218-5PF-1-N-FM-OPT0518**

PL27164/1947

VSWR Plot

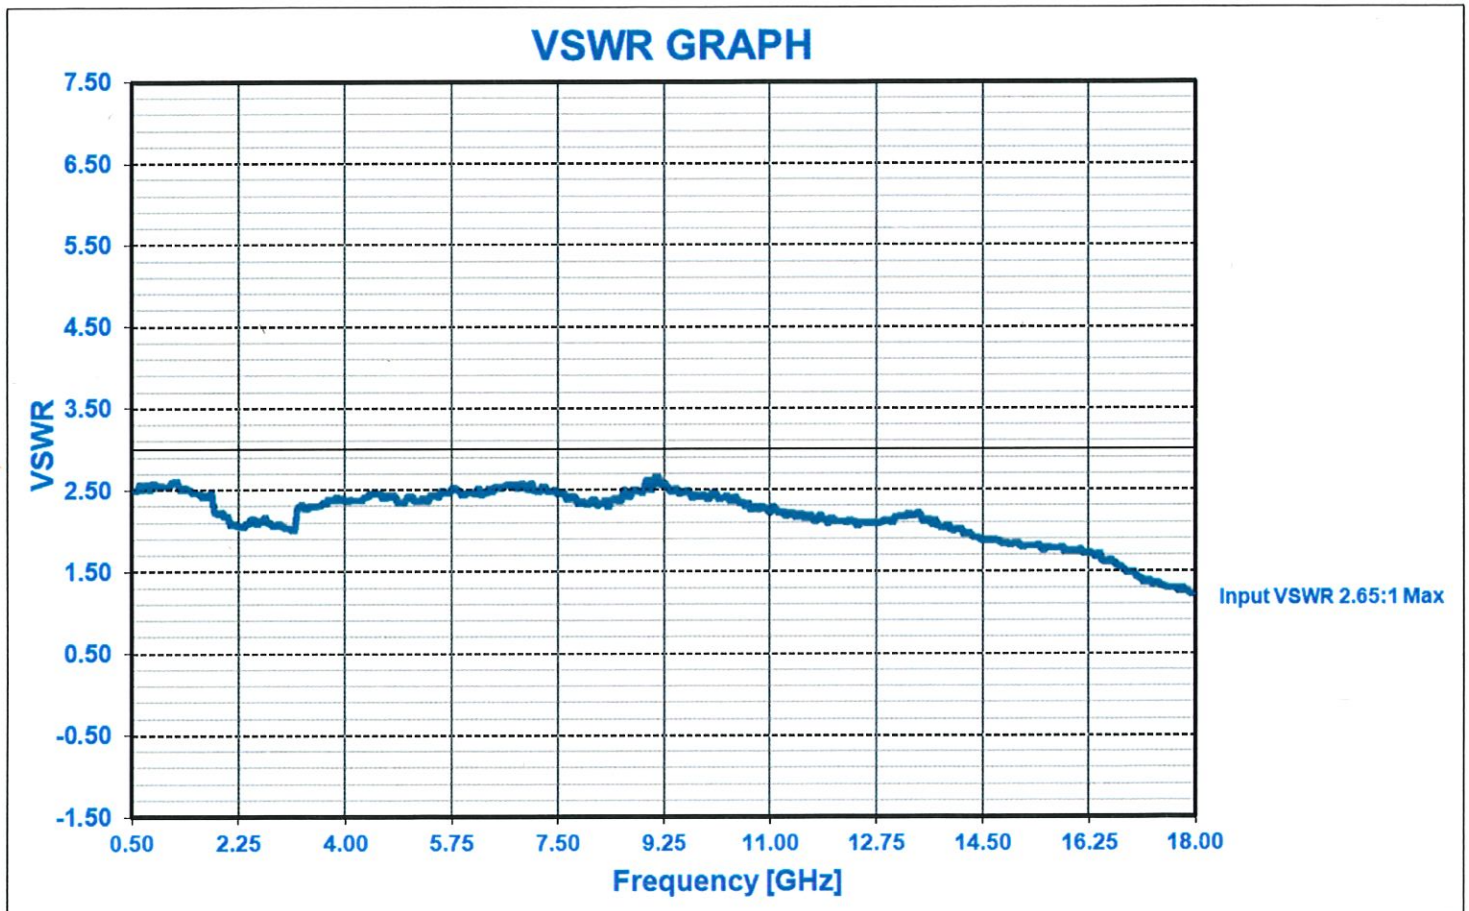



**SUMMARY TEST DATA
ON
DD-20-218-5PF-1-N-FM-OPT0518**

PL27164/1947

Flatness Plot

MODEL: DD-20-218-5PF-1-P-M-OPT0518
 SERIAL NO: PL27164
 Test Temp: +25C
 TESTED BY: E.BENSON
 DATE: 11/15/19



INPUT POWER= -20dBm

0.5	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0
-7.7	-7.9	-6.9	-7.2	-6.7	-6.5	-6.6	-6.4	-6.2	-6.7	-6.3	-7.4	-7.0	-7.3	-6.9	-7.6	-6.7	-7.7	-6.4
0.1	0.0	0.6	0.4	0.7	0.8	0.8	0.9	1.1	0.7	1.0	0.3	0.5	0.3	0.6	0.2	0.7	0.1	0.9

Frequency (GHz)
Measured (mV)
Flatness Error (dB)
+/- Error (dB)
Sensitivity (mV/mW) Typ

0.53
695

Detector V-Out VS frequency

