



**SUMMARY TEST DATA  
ON  
P1T-200M18G-60-T-SFF**

PL28502/2013

Customer: \_\_\_\_\_ Tested By: B. Willard  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: P1T-200M18G-60-T-SFF Date: 9/21/2020  
Serial No: PL28502/2013 Drawing No: 27622183 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC	
1	Frequency Range:	0.5 – 18 GHz	0.5 – 18 GHz (See Plot)	PMI QA2	
2	Insertion Loss:	1.0dB Typ, 2.5dB Max	-2.04dB (See Plot)		
3	Isolation:	-65dB Min	-65.54dB (See Plot)		
4	VSWR: (J1 – “On” Only) (J2 – “On” or “Off”)	2.0:1 Max	Input:1.71:1 Output:1.87:1 See Plot		
5	Switching Speed:	25ns Max (50% TTL to 10/90% RF)	20ns See Typical Characteristics		
6	Operating Power:	+27dBm “Hot Switching” Max	Pass		
7	Control:	TTL Logic “0” = Off TTL Logic “1” = On	Pass		
8	DC Supply:	+15VDC @ 50 mA Max. -15VDC @ 75 mA Max.	10mA 19mA		PMI QA2


QA/QC Approval:   PMI QA2 Date: 10/2/20



**SUMMARY TEST DATA  
ON  
P1T-200M18G-60-T-SFF**

PL28502/2013

**(J1-J2) Insertion Loss and Return Loss**

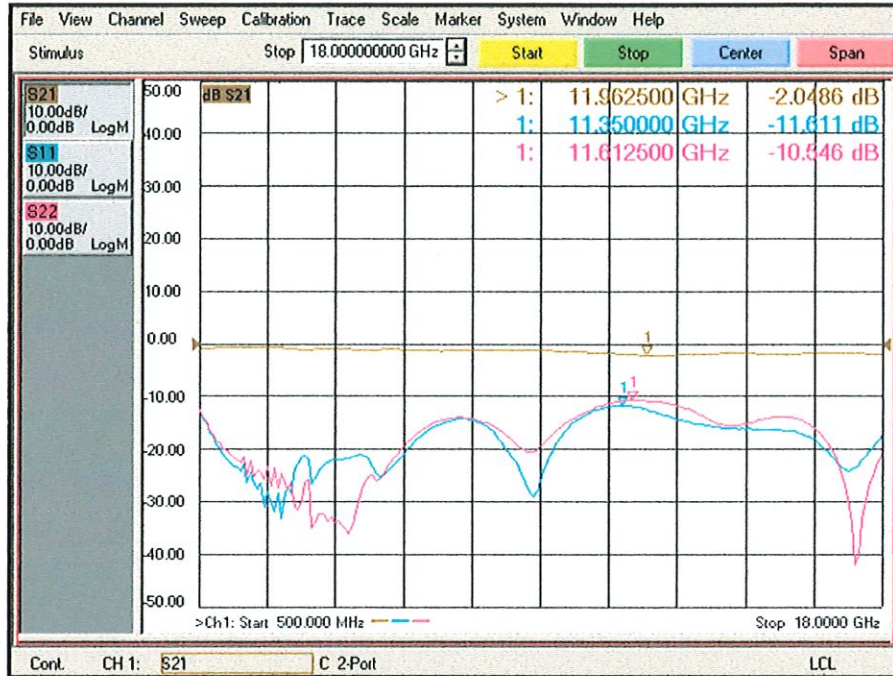

**(J1 - J2) Isolation and Return Loss**

