





# SUMMARY TEST DATA ON DD-20-218-5PF-3-P-M

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: DD-20-218-5PF-3-P-M  
 Serial Pair: PL28590/2014

Tested By: K. Mansfield  
 Temperature: +25°C  
 Date: 4/2/20  
 Drawing No: 27620615      REV: A1

| TEST ITEM NO. | PARAMETERS           | SPECIFIED VALUE      | Test Results                          | QA QC      |
|---------------|----------------------|----------------------|---------------------------------------|------------|
| 1             | Frequency Range:     | 2 to 18 GHz          | 2 to 18 GHz                           | PMI<br>QA1 |
| 2             | VSWR:                | 3.5:1 Max. @ -23 dBm | 2.4:1<br>See Plot                     |            |
| 3             | Frequency Flatness:  | ±1.0 dB Max.         | ±0.94 dB                              |            |
| 4             | Rise Time:           | 10 ns Typ.           | <10 ns<br>See Typical Characteristics |            |
| 5             | Voltage Sensitivity: | 500 mV/mW            | 600 mV/mW<br>See Plot                 |            |
| 6             | Maximum Input Power: | +20 dBm              | +20 dBm                               |            |
|               |                      |                      |                                       |            |

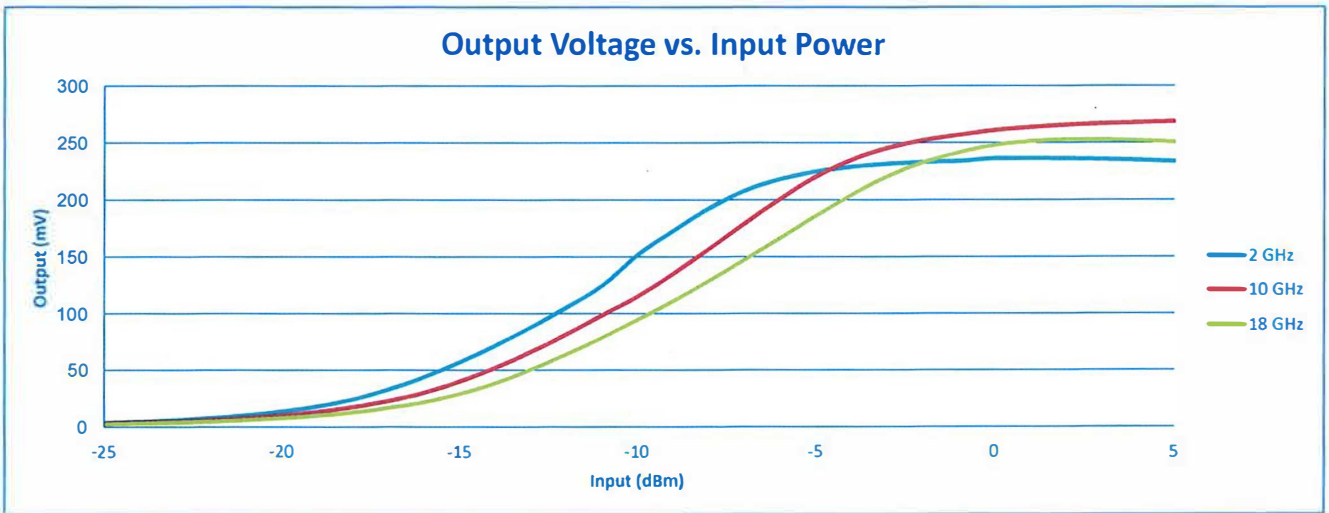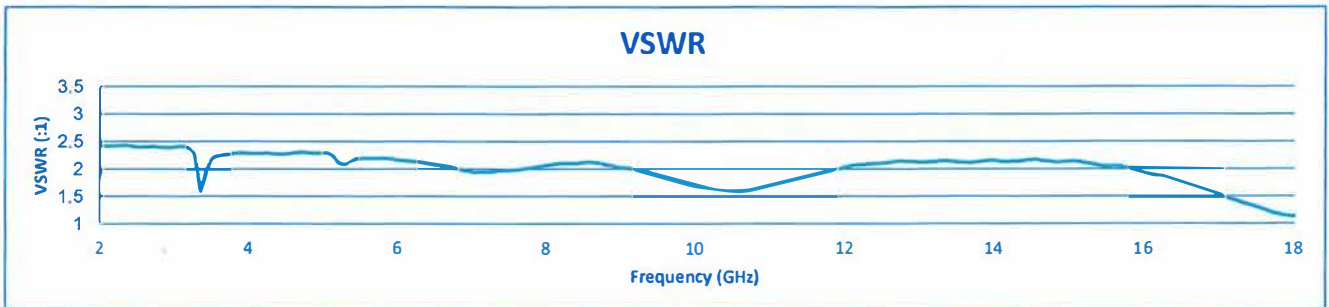

QA/QC Approval:  Date: 4/2/20