



SUMMARY TEST DATA ON PEC-40/25-218-21-12-SFF-TTLVG

Customer: _____
 SO No: _____
 Model No: PEC-40/25-218-21-12-SFF-TTLVG
 Serial No: PL28723/2017

Tested By: K. Mansfield
 Temperature: +25°C
 Date: 4/23/2020
 Drawing No: 27605737 REV: B1




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	2 GHz to 18 GHz	2 GHz to 18 GHz	PM QA1
2	Max Gain @ Max Gain Position: Min Gain @ Max Gain Position: Max Gain @ Min Gain Position: Min Gain @ Min Gain Position:	+42 dB Max. +38 dB Min. +27 dB Max. +23 dB Min.	41.7 dB 38.3 dB 26.8 dB 23.8 dB See Plots	
3	Pout @ 1 dB Compression Max Gain Position: Min Gain Position:	+21 dBm Min. +20 dBm Min.	Pass See Typical Characteristics	
4	Psat (Both Gains) Over Operating Temperature Range	+26 dBm Max.	Pass See Typical Characteristics	
5	Noise Max gain Position: Min Gain Position:	+4.5 dB Max. +7.0 dB Max.	Pass See Typical Characteristics	
6	VSWR: In/Out	2.0:1 Max.	1.7:1 In 1.5:1 Out See Plots	
7	Input/Output Impedance:	50 Ω Nominal	50 Ω See Typical Characteristics	
8	Input Power: (Without Damage)	+20 dBm CW Max.	+20 dBm Pass	
9	In-Band Harmonics: @ or below the 1 dB Compression Point	-10 dBc Min.	>-10 dBc See Typical Characteristics	
10	Pulse Rise Time: with input signals up to 20 dBm	<5 ns	<5 ns See Typical Characteristics	
11	Pulse Overshoot: with input signals up to 20 dBm	<0.5 dB	<0.5 dB See Typical Characteristics	
12	Pulse Droop: with pulses up to 250 μs in duration input signals up to -20 dBm	<2.0 dB	<2.0 dB See Typical Characteristics	
13	Pulse Recovery Time: with pulses up to 250 μs in duration input signals up to -20 dBm	15 ns	<15 ns See Typical Characteristics	
14	Gain Switching Time:	<500 ns	<500 ns See Typical Characteristics	
15	Gain Switch Control:	TTL High "1" - Max Gain TTL Low "0" - Min Gain	Pass	
16	DC Supply:	780 mA Max. @ +12 V ±5% Max Gain Position 610 mA Max. @ +12 V ±5% Min Gain Position	380 mA Max Gain Position 380 mA Min Gain Position	PM QA1

QA/QC Approval: *[Signature]* **PM QA1** Date: 4/23/20



SUMMARY TEST DATA ON PEC-40/25-218-21-12-SFF-TTLVG

PL28723/2017

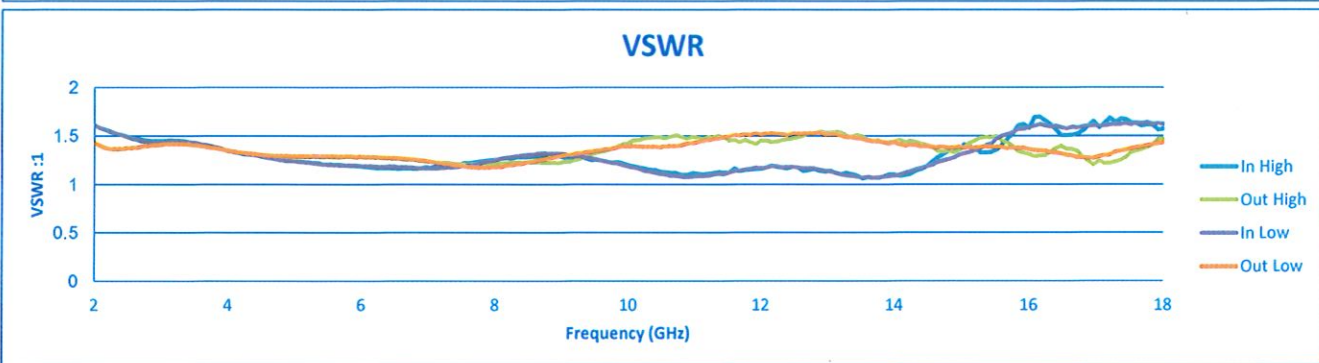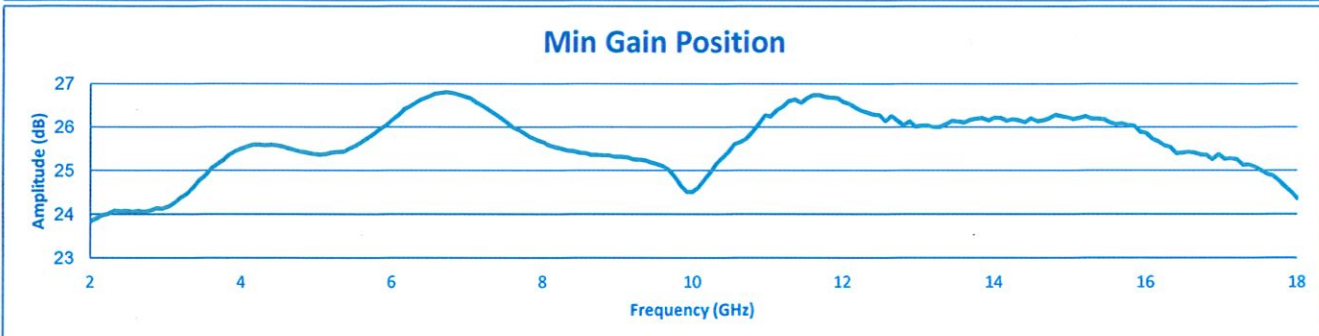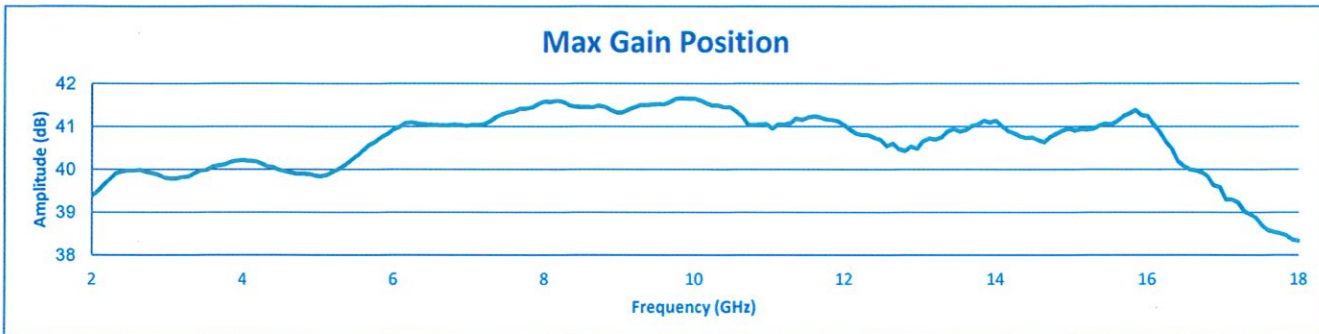

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com