




**SUMMARY TEST DATA ON AMPLIFIER**

**Customer :**  
**Job No :**  
**Model No : PE2-38-218-4R5-8-15-SFF**  
**Serial No : PL2880**

**Tested By : Kevin Mason**  
**Temperature : +25°C**  
**Date : 10/24/06**


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Frequency Range:	2.0-18.0 GHz	Pass	
2	Gain:	+38dB Min.	Pass (See Plot)	
3	Gain Flatness:	± 1.5dB Max.	± 1.15dB	
4	OP1dB:	+8dBm Min.	≥ +8dBm	
5	VSWR:	Input : 2.0:1 Output: 2.0:1 (Max.)	Pass (See Plot)	
6	Noise Figure:	3.8dB Typ.	Pass (See NF Plot)	
7	DC Supply:	250mA@ +15VDC Max.	200mA@ +12V	

**Production Manager Approval:**  **Date: 10/24/06**

**QA/QC Approval:**  **Date: 10/24/06**

5715 Industry Lane, Unit 11, Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
 email: [sales@planarelec.com](mailto:sales@planarelec.com)

### S-Parameter Plot

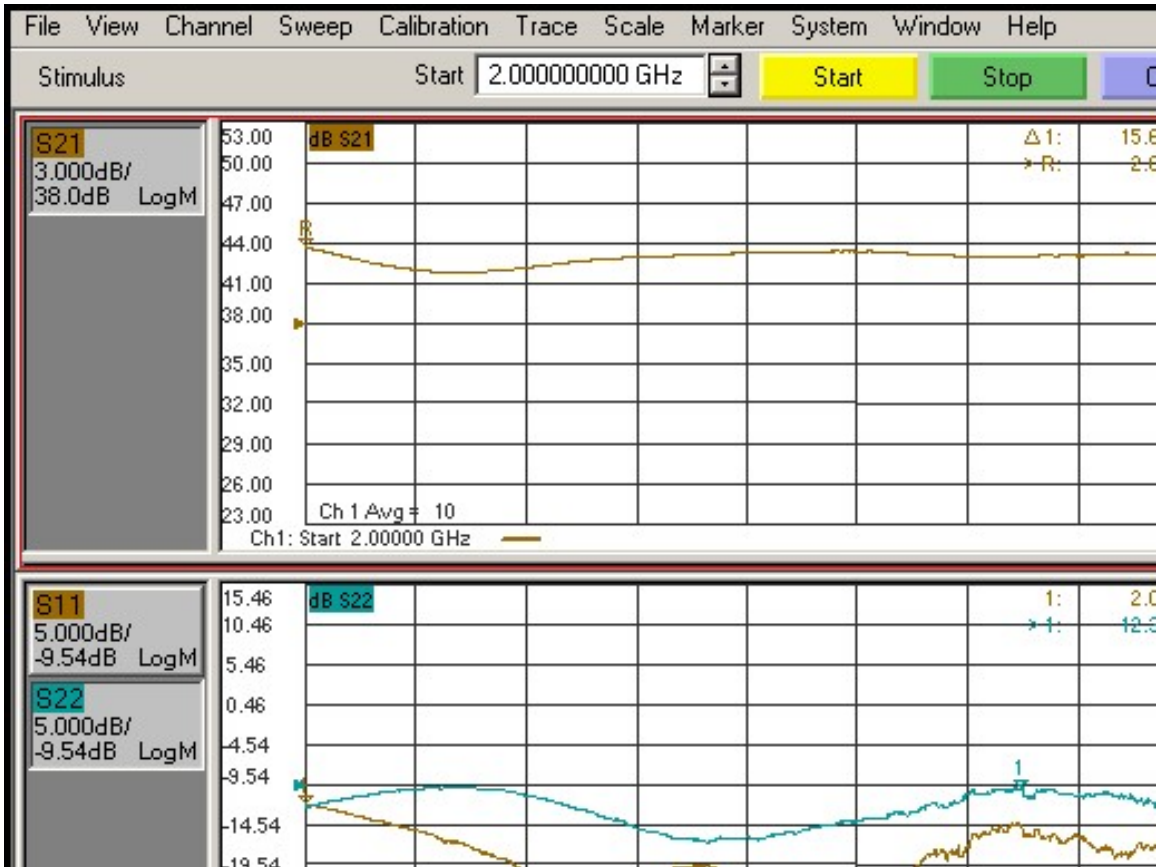

### Noise Figure Plot

