



SUMMARY TEST DATA
ON
P1T-500M18G-80-R-SFF-SW21841A

Customer: _____
 SO No: _____
 Model No: P1T-500M18G-80-R-SFF-SW21841A
 Serial No: PL29940/2032

Tested By: L. McGraw
 Temperature: +25°C
 Date: 4/6/2021
 Drawing No: 27634516 Rev: A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 18.0 GHz	0.5 to 18.0 GHz	PMI QA 2
2	Isolation:	45 dB Min. (0.5 to 1.0 GHz) 70 dB Min. (1.0 to 2.0 GHz) 85 dB Min. (2.0 to 12.4 GHz) 80 dB Min. (12.4 to 18.0 GHz)	91 dB (0.5 to 1.0 GHz) 99 dB (1.0 to 2.0 GHz) 88 dB (2.0 to 12.4 GHz) 87 dB (12.4 to 18.0 GHz) See Plot	PMI QA 2
3	Insertion Loss:	2.0 dB Max. (0.5 to 2.0 GHz) 2.2 dB Max. (2.0 to 4.0 GHz) 2.5 dB Max. (4.0 to 8.0 GHz) 3.0 dB Max. (8.0 to 12.4 GHz) 3.5 dB Max. (12.4 to 18.0 GHz)	0.7 dB (0.5 to 2.0 GHz) 0.9 dB (2.0 to 4.0 GHz) 1.3 dB (4.0 to 8.0 GHz) 1.8 dB (8.0 to 12.4 GHz) 2.3 dB (12.4 to 18.0 GHz) See Plot	
4	VSWR : IN/OUT "On Position"	1.4:1 Max. (0.5 to 4.0 GHz) 1.6:1 Max. (4.0 to 8.0 GHz) 1.9:1 Max. (8.0 to 18.0 GHz)	1.34:1 (0.5 to 4.0 GHz) 1.27:1 (4.0 to 8.0 GHz) 1.72:1 (8.0 to 18.0 GHz) See Plot	
5	Input Power:	2W Average 10W Peak @ 1 µsec PW	Pass	
6	Video Leakage:	20 mV Max. @ 350 MHz BW (Input & Output)	20mV Max. @ 350 MHz BW (Input & Output)	
7	Rise / Fall Time: (10% to 90% RF & 90% to 10% RF)	2 ns Max.	2'ns See Typical Characteristics	
8	Delay: On / Off (50% to 10% / 90% RF)	20 ns Max.	<20ns See Typical Characteristics	
9	DC Supply:	+15 VDC @ 100 mA Typ. -15 VDC @ 45 mA Typ.	+15VDC @ 38mA '-15VDC @ 45mA	
10	Control Signal:	TTL COMPATIBLE 0 "ISOLATION" 1 "INSERTION LOSS"	Pass	

QA/QC Approval: _____

PMI
QA 2




Date: 4/6/21

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com



SUMMARY TEST DATA
ON
P1T-500M18G-80-R-SFF-SW21841A

PL29940/2032

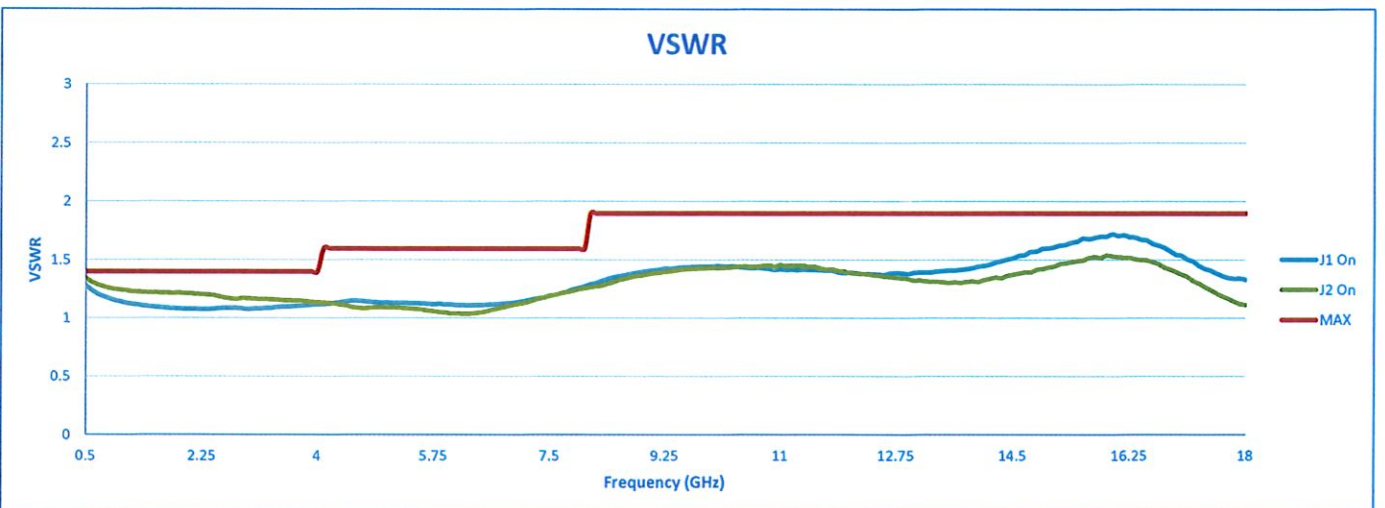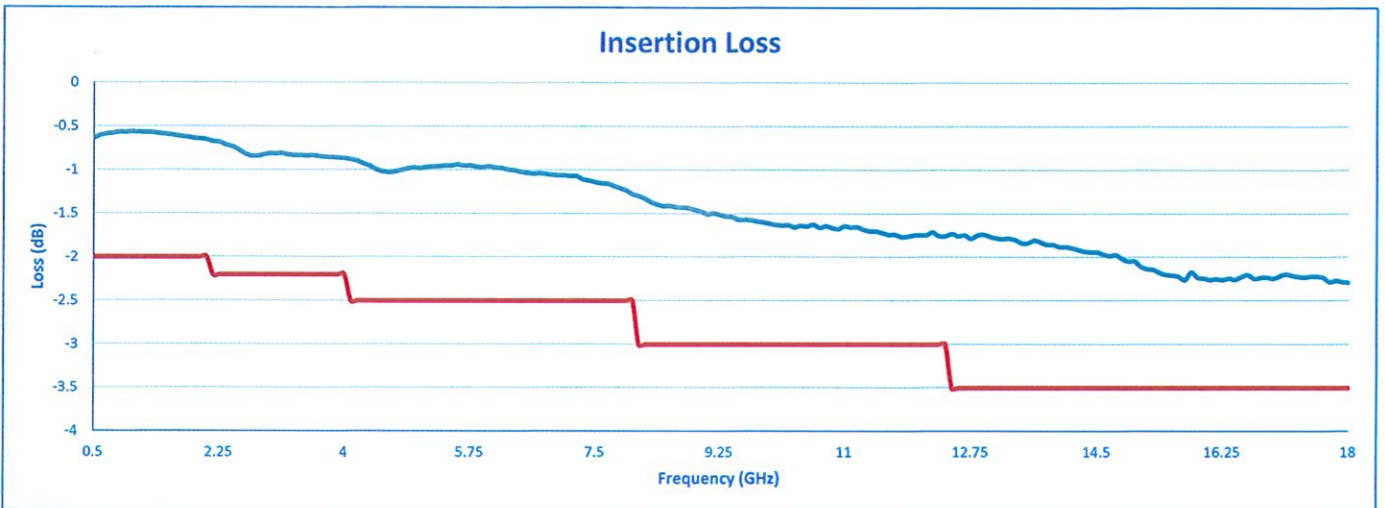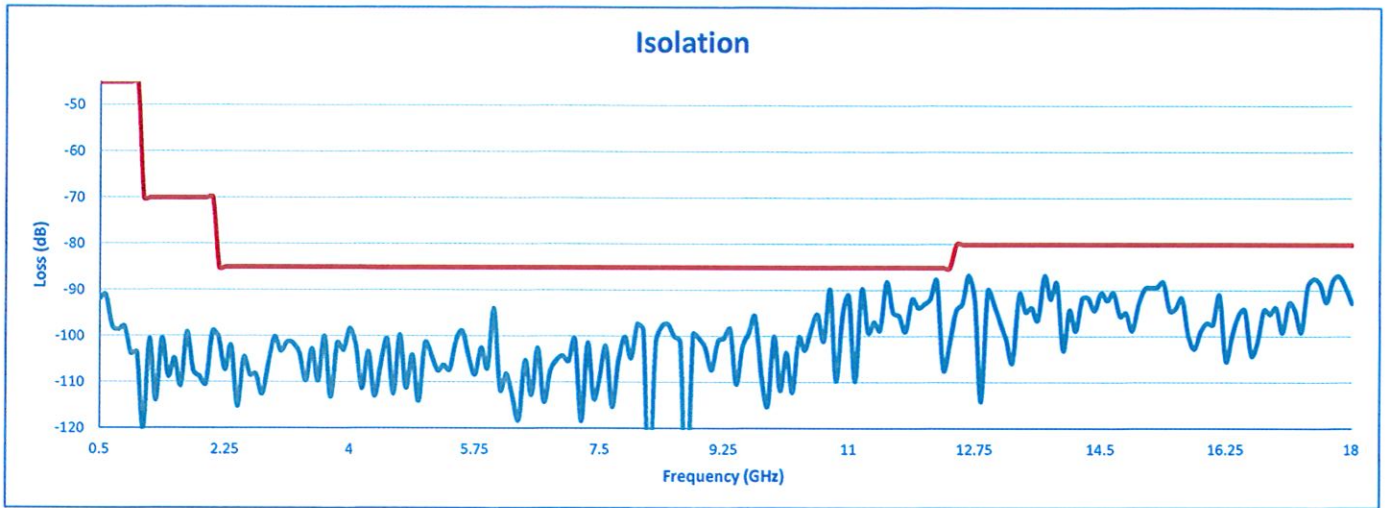

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com