



**SUMMARY TEST DATA  
ON  
PDC-418-20-50W-SFF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: PDC-418-20-50W-SFF  
 Part: PL31144/2101

Tested By: Bryan K.  
 Temperature: 25 Degrees C  
 Date: 1/7/2021  
 Drawing No: 27040180      REV: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA	QC
1	Frequency Range:	4 TO 18 GHz	4 TO 18 GHz	PMI	QA 2
2	Insertion Loss:	0.7 dB MAX.	0.5 dB (See Plot)		
3	Coupling Factor:	20 ± 0.7 dB MAX.	20.68 dB (See Plot)		
4	Coupling Sensitivity:	±0.7dB MAX.	±0.26 dB (See Plot)		
4	Directivity:	12 dB MIN.	36.96 dB (See Plot)		
5	VSWR:	Primary 1.41:1 MAX. Secondary 1.41:1 MAX.	1.31:1 IN 1.3:1 OUT		
6	Power Handling:	Incident 50 W MAX. Reflected 2 W MAX.	Pass See Typical Characteristics		
7	Impedance	50 Ω	Pass	PMI	QA 2

QA/QC Approval: \_\_\_\_\_

PMI  
QA 2


Date: \_\_\_\_\_

1/21/21



**SUMMARY TEST DATA  
ON  
PDC-418-20-50W-SFF**

PL31144/2101

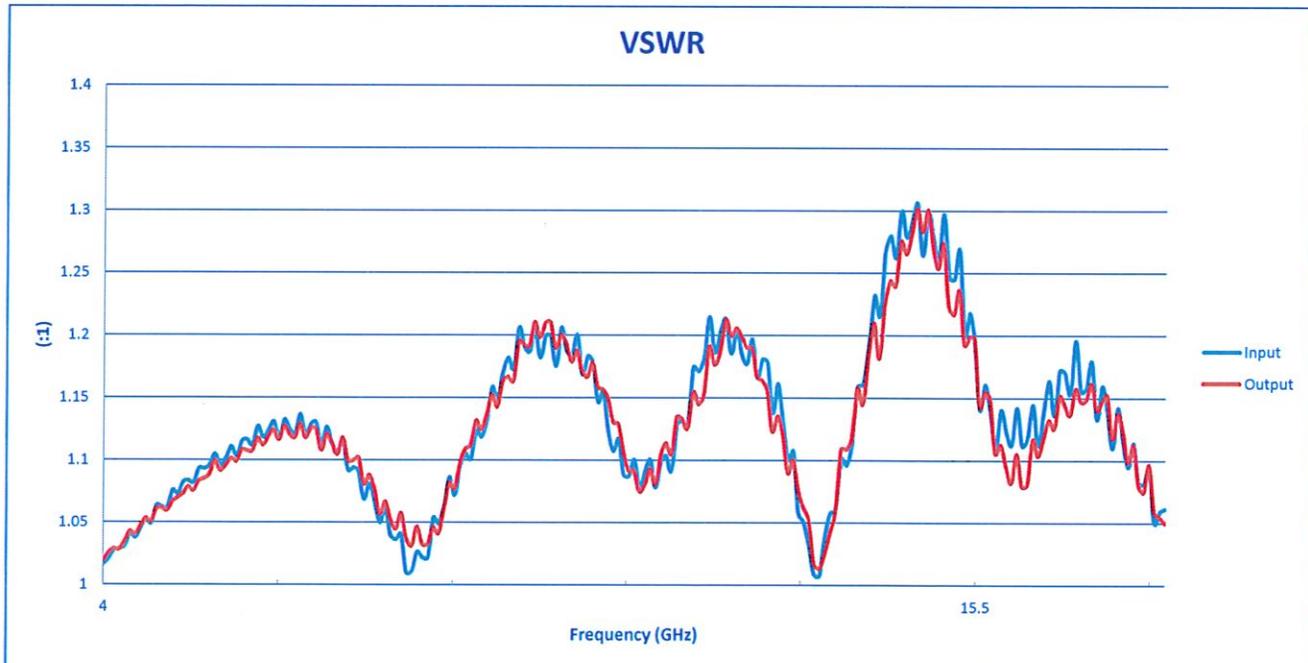



# SUMMARY TEST DATA ON PDC-418-20-50W-SFF

PL31144/2101

