



**SUMMARY TEST DATA
ON
PDC-418-20-50W-SFF**

Customer: _____
 SO No: _____
 Model No: PDC-418-20-50W-SFF
 Part: PL31161/2101

Tested By: Bryan K.
 Temperature: 25 Degrees C
 Date: 1/7/2021
 Drawing No: 27040180 REV: A1


TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	4 TO 18 GHz	4 TO 18 GHz	PMI QA 2
2	Insertion Loss:	0.7 dB MAX.	0.53 dB (See Plot)	
3	Coupling Factor:	20 ± 0.7 dB MAX.	20.57 dB (See Plot)	
4	Coupling Sensitivity:	±0.7dB MAX.	±0.25 dB (See Plot)	
4	Directivity:	12 dB MIN.	39.6 dB (See Plot)	
5	VSWR:	Primary 1.41:1 MAX. Secondary 1.41:1 MAX.	1.3:1 IN 1.28:1 OUT	
6	Power Handling:	Incident 50 W MAX. Reflected 2 W MAX.	Pass See Typical Characteristics	
7	Impedance	50 Ω	Pass	

QA/QC Approval: PMI QA 2 Date: 1/21/21



**SUMMARY TEST DATA
ON
PDC-418-20-50W-SFF**

PL31161/2101

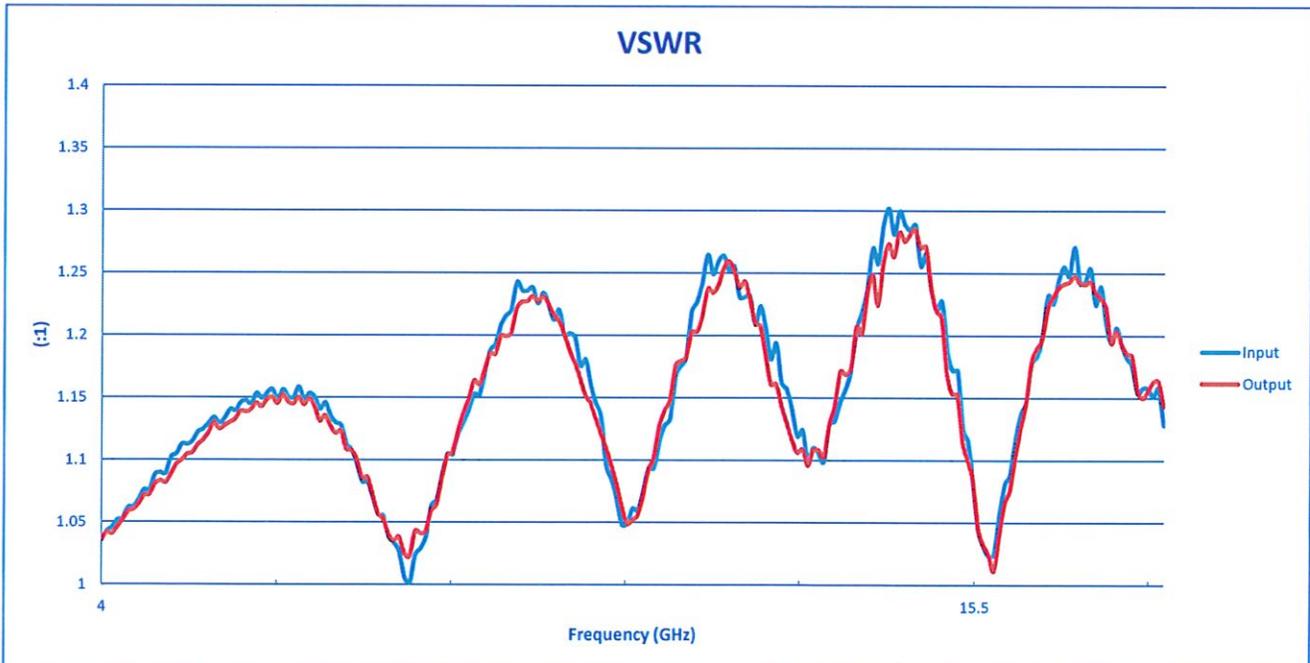



**SUMMARY TEST DATA
ON
PDC-418-20-50W-SFF**

PL31161/2101

