



**SUMMARY TEST DATA
ON
P4T-0R1G20G-100-T-SFF-RoHS**

PL31260/2104

Customer: _____ Tested By: Bryan K.
SO No: _____ Temperature: +25°C
Model No: P4T-0R1G20G-100-T-SFF-RoHS Date: 1/22/2020
Serial No: PL31260/2104 Drawing No: 27639820 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	0.1 GHz – 20.0 GHz	0.1 GHz – 20.0 GHz	PMI QA 2	
2	Insertion Loss:	5.0dB Max	4.4dB See Plots		
3	Isolation:	110dB Min	110.0dB See Plots		
4	VSWR: (ON/OFF)	2.0:1 Max.	2.0:1 See Plots		
5	Switching Speed:	300 ns (10% - 90% RF)	See Typical Characteristics		
6	Survival Power:	+30 dBm (1 Watt)	PASS		
7	RF Phase Tracking:	2 Degree Per ° Celsius	See Typical Characteristics		
8	DC Supply:	+5VDC @ 200 mA Max -12VDC @ 100 mA Max	+5 VDC @ 110mA -12 VDC @ 40mA		PMI QA 2

QA/QC Approval: _____

PMI
QA 2

Date: _____

1/26/21

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



SUMMARY TEST DATA ON P4T-0R1G20G-100-T-SFF-RoHS

PL31260/2104

(J1-J2) Insertion Loss and Return Loss



(J1-J3) Insertion Loss and Return Loss







SUMMARY TEST DATA ON P4T-0R1G20G-100-T-SFF-RoHS

PL31260/2104

(J1-J4) Insertion Loss and Return Loss

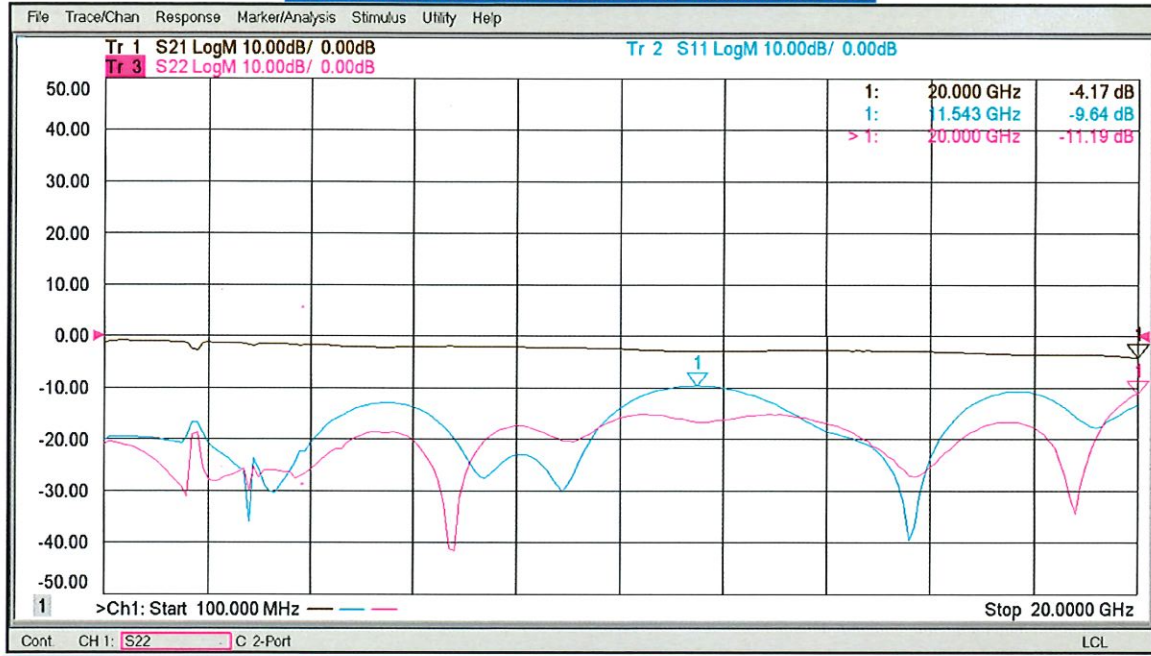

(J1-J5) Insertion Loss and Return Loss

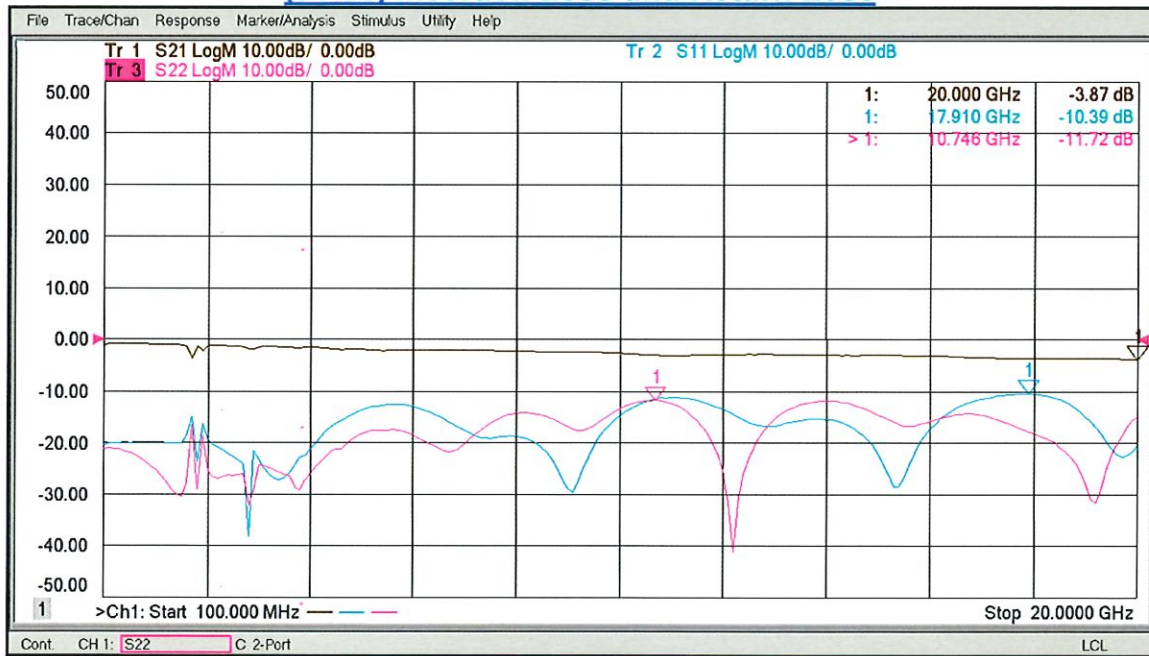





**SUMMARY TEST DATA
ON
P4T-0R1G20G-100-T-SFF-RoHS**

PL31260/2104

(J1 – J2) Isolation and Termination Return Loss

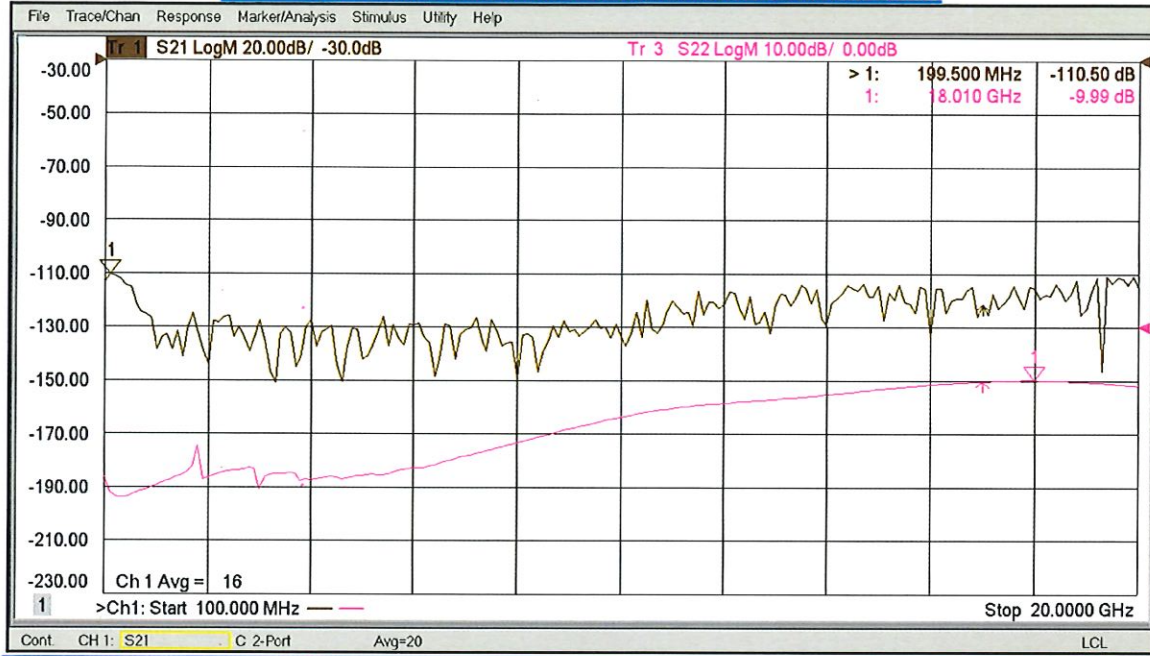

(J1 – J3) Isolation and Termination Return Loss

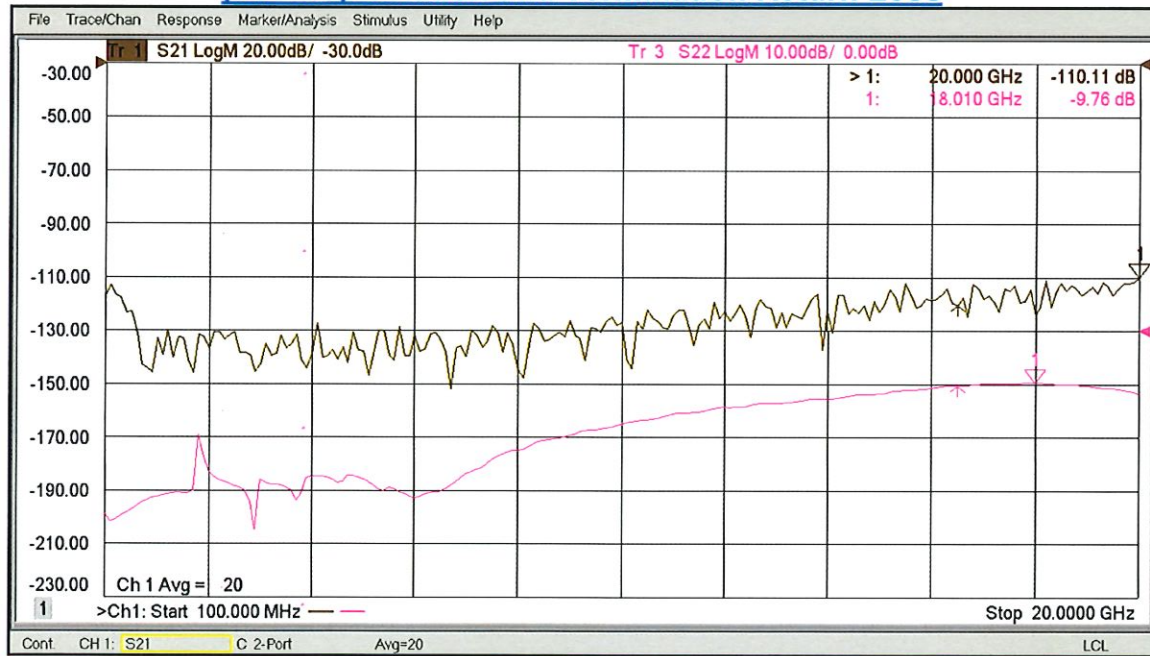



**SUMMARY TEST DATA
ON
P4T-0R1G20G-100-T-SFF-RoHS**

PL31260/2104

(J1 – J4) Isolation and Termination Return Loss



(J1 – J5) Isolation and Termination Return Loss

