



**SUMMARY TEST DATA
ON
P2T-500M18G-80-T-515-SFF-4W-ST**

Customer: _____
 SO No: _____
 Model No: P2T-500M18G-80-T-515-SFF-4W-ST
 Serial No: PL32541/2121

Tested By: L. McGraw
 Temperature: 25 Degrees C
 Date: 5/26/2021
 Drawing No: 27630243 Rev: B2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	0.5 to 18.0 GHz	0.5 to 18.0 GHz	PMI QA 2	
2	Insertion Loss:	3.5 dB Typ.	2.7 dB See Plot		
3	Isolation:	70 dB Min.	75 dB See Plot		
4	VSWR:	2.0:1 Max.	1.9:1 See Plot		
5	Operating Input Power:	4 Watts CW Max.	Pass See Typical Characteristics		
6	Switching Speed:	60 ns Max.	<40 ns See Typical Characteristics		
7	Power Supply:	+5 VDC @ 150 mA -15 VDC @ 150 mA	+5 VDC @ 61 mA -15 VDC @ 77 mA		
8	Control:	Logic Table			PMI QA 2
		CTL1	Function	Pass	
		1	J1-J2		
		0	J1-J3		

QA/QC Approval: _____

PMI
QA 2



Date: _____

5/28/21



SUMMARY TEST DATA ON P2T-500M18G-80-T-515-SFF-4W-ST

PL32541/2121

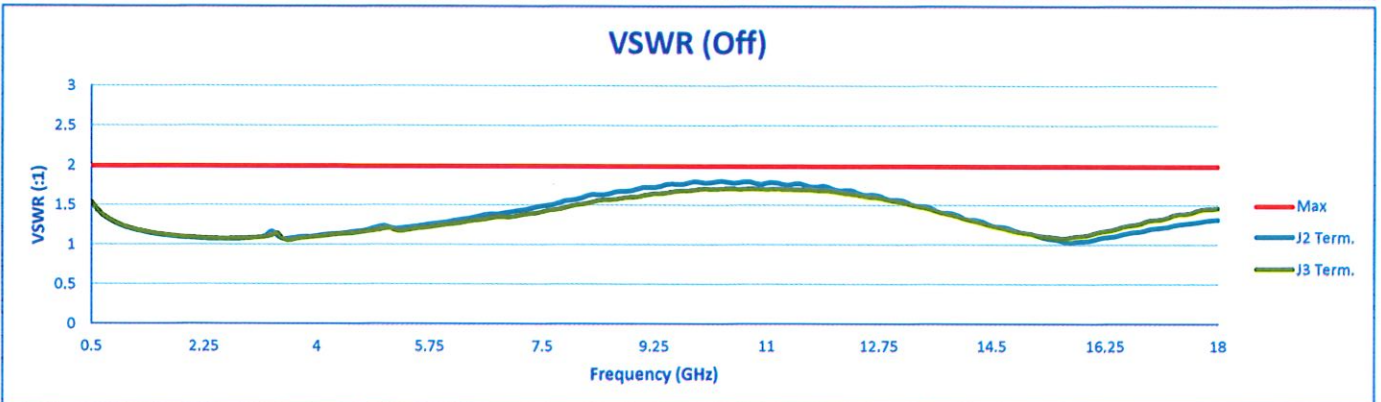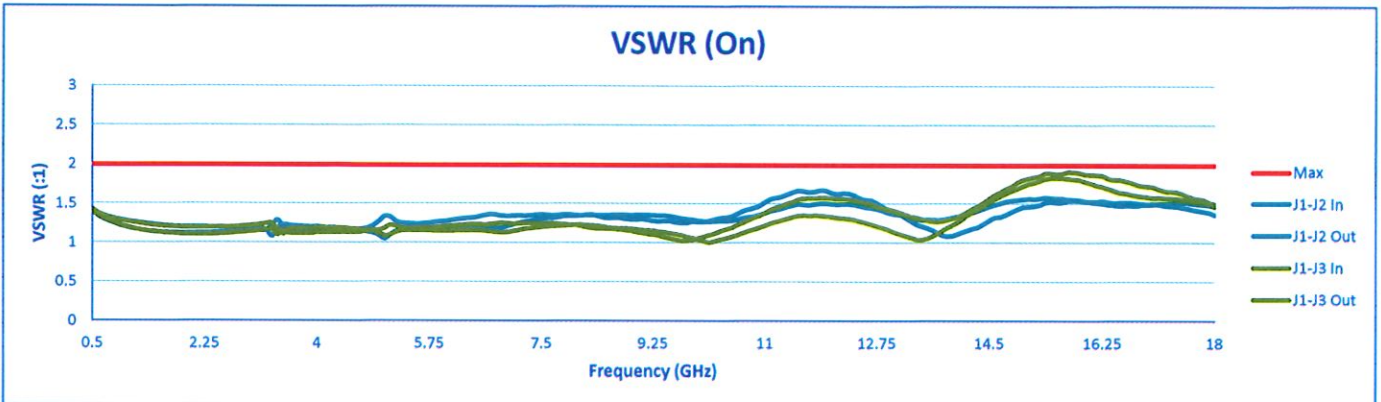



SUMMARY TEST DATA ON P2T-500M18G-80-T-515-SFF-4W-ST

PL32541/2121

