



**SUMMARY TEST DATA
ON
P4T-0R1G20G-100-T-SFF-ROHS**

Customer: _____
SO No: _____
Model No: P4T-0R1G20G-100-T-SFF-ROHS
Serial No: PL32648/2123

Tested By: Bryan K.
Temperature: +25°C
Date: 6/9/2021
Drawing No: 27639820 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.1 GHz TO 20.0 GHz	0.1 GHz TO 20.0 GHz	PMI QA 2
2	Insertion Loss:	5.0 dB MAX	4.7 dB See Plot	
3	Isolation:	110 dB MIN	110.21 dB See Plot	
4	VSWR: In/Out	2.0:1 Max	1.9:1 See Plot	
5	Switching Speed:	300 ns (10% - 90% RF)	See Typical Characteristics	
6	Survival Power:	+30 dBm (1 WATT)	Pass	
7	RF Phase Tracking	2 Degrees Per °C	Pass	
8	Power Supply:	+5 VDC @ 200mA MAX -12 VDC @ 100mA MAX	+5 VDC @ 90 mA -15 VDC @ 50 mA	

QA/QC Approval: _____

PMI
QA 2




Date: _____

6/9/21



SUMMARY TEST DATA ON P4T-0R1G20G-100-T-SFF-ROHS

PL32648/2123

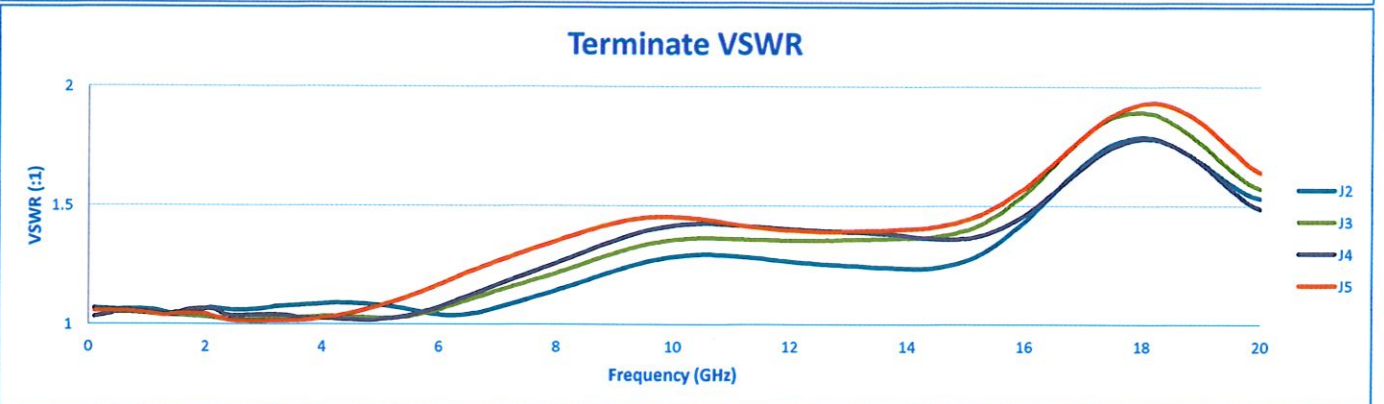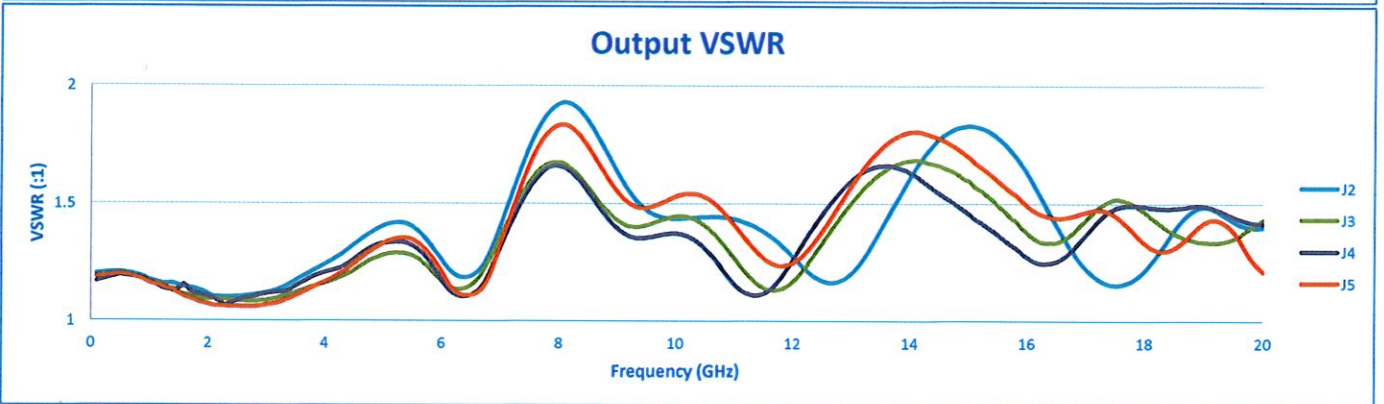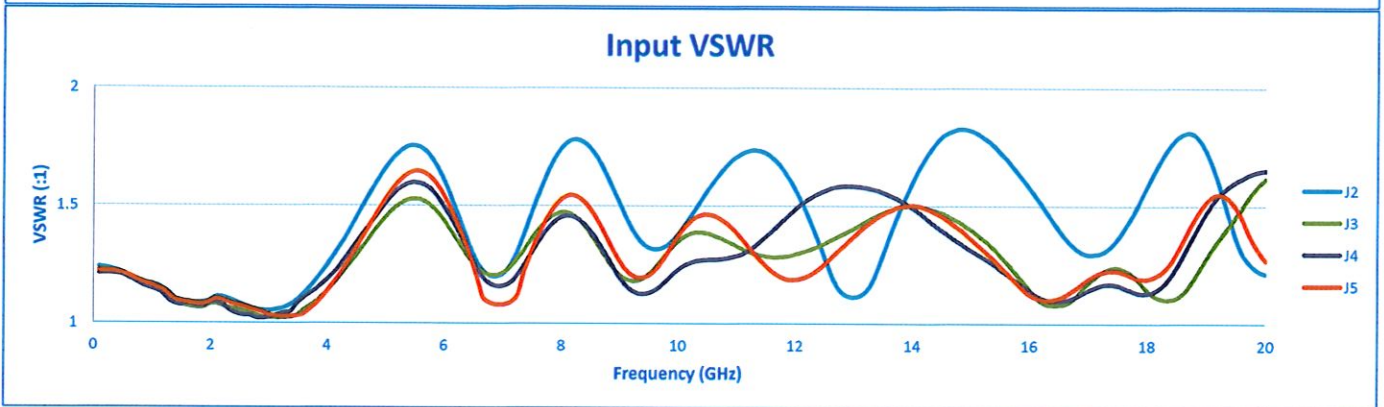



**SUMMARY TEST DATA
ON
P4T-0R1G20G-100-T-SFF-ROHS**

PL32648/2123

