



PL33090/2130

SUMMARY TEST DATA ON APD-2-812D4-30W-SFF

Customer: _____
SO No: _____
Model No: APD-2-812D4-30W-SFF
Serial No: PL33090/2130

Tested By: Tin Lay
Temperature: +25 C
Date: 7/28/2021
Drawing No: 27040220 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	8 TO 12.4 GHz	8 TO 12.4 GHz	PMI QA 2	
2	Insertion Loss	0.4 dB Max.	0.29 dB (See Plot)		
3	Isolation	16 dB Min.	25.88 dB (See Plot)		
4	VSWR (IN/OUT):	Input 1.35:1 Max. Output 1.35:1 Max.	Input 1.23 Output 1.25 (See Plot)		
5	Amplitude Balance	±0.2dB Max.	0.02 dB Max. -0.02 dB Min. (See Plot)		
6	Phase Balance	±4° Max.	0.10 Max. -0.10 Min. (See Plot)		
7	Power Handling:	Forward 30 W Max. Reverse 1 W Min.	Pass See Typical Characteristics		
8	Impedance:	50 Ω	Pass		PMI QA 2

QA/QC Approval: _____

PMI
QA 2



Date: _____

7/28/2021



PL33090/2130

SUMMARY TEST DATA ON APD-2-812D4-30W-SFF

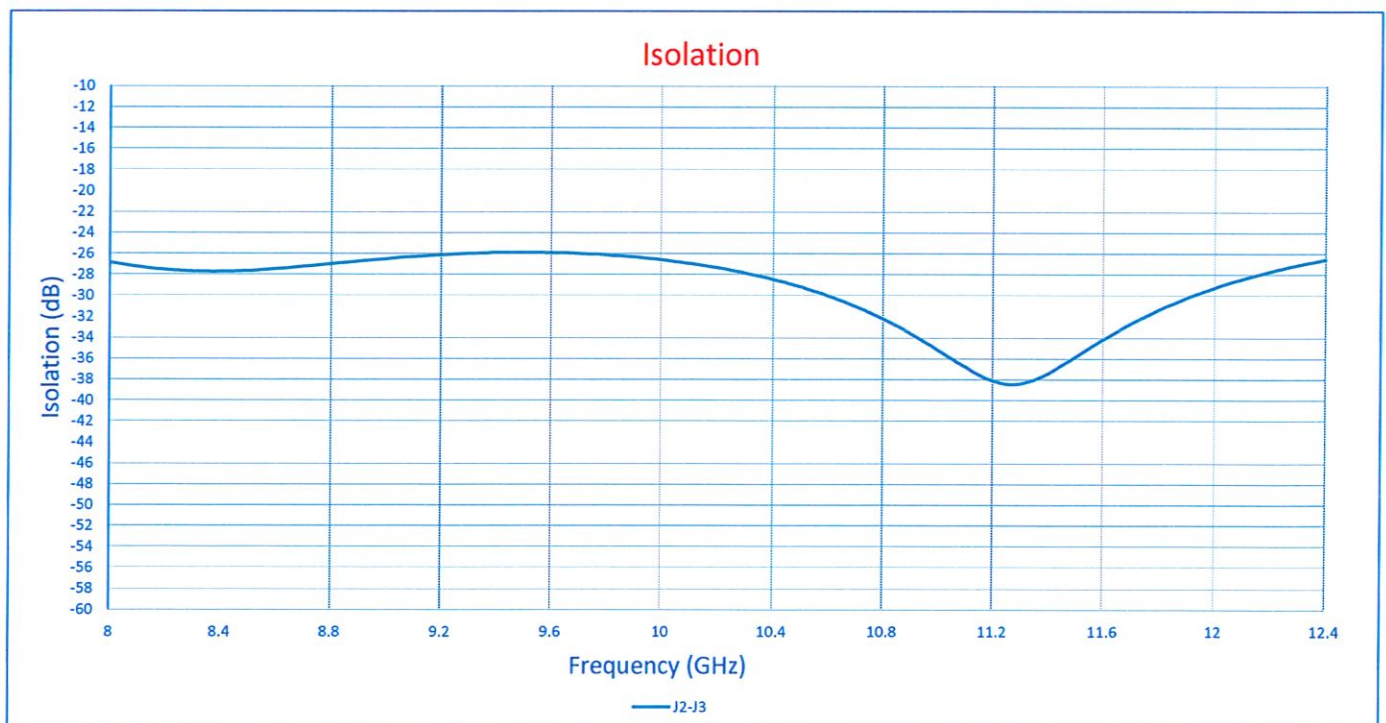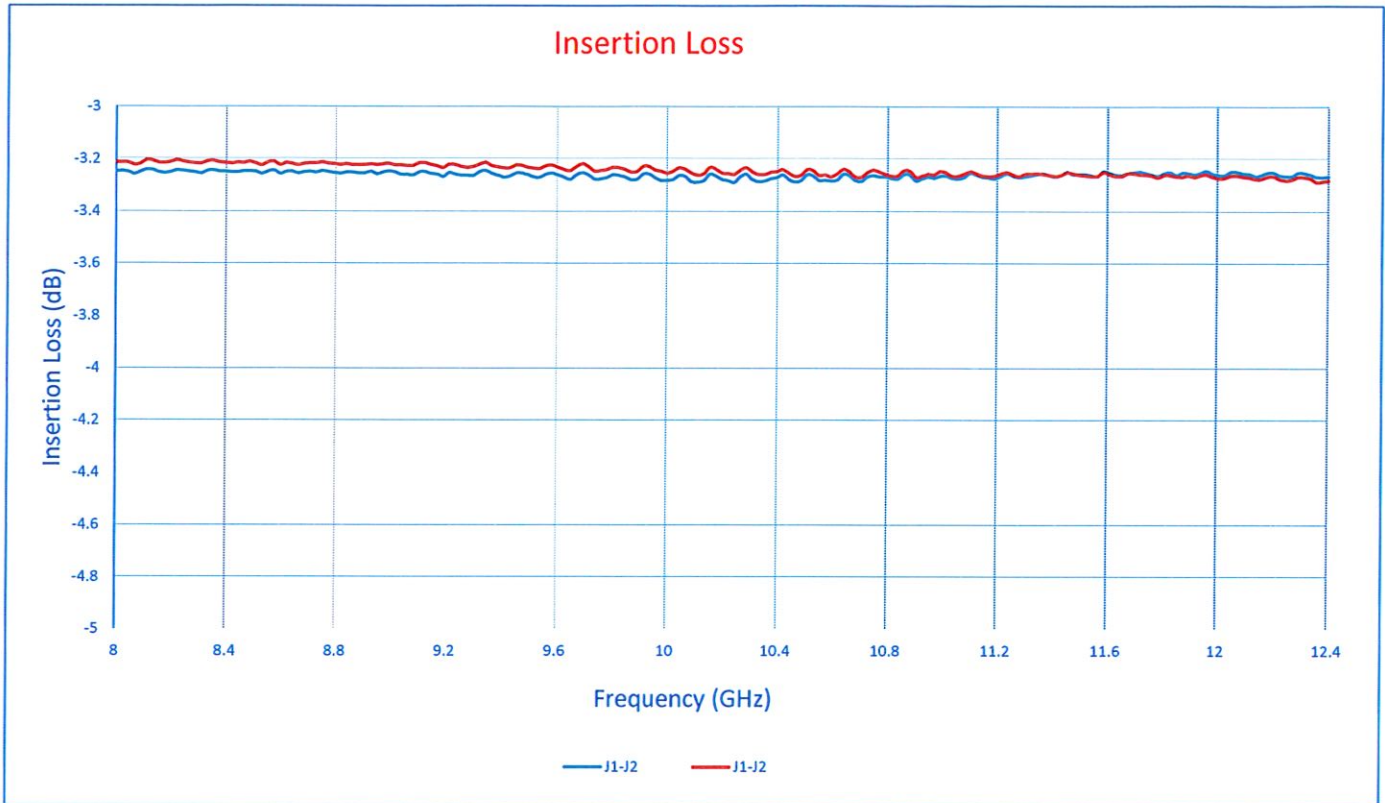



SUMMARY TEST DATA ON APD-2-812D4-30W-SFF

