



**SUMMARY TEST DATA  
ON  
LM-20M18G-100W-15DBM**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: LM-20M18G-100W-15DBM  
 Serial No: PL33234/2130

Tested By: A. Lopez  
 Temperature: 25 Degrees C  
 Date: 7/30/2021  
 Drawing No: 27438620      REV: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC	
1	Frequency Range:	20 MHz To 18 GHz	20 MHz To 18 GHz	PMI QA 2	
2	Insertion Loss:	2.6 dB Max. @ -10 dBm Input	2.26 dB See Graph		
3	Input/Output VSWR:	2.0:1 Max. @ -10 dBm Input	1.94:1 See Graph		
4	Leakage:	+15 dBm Max. @100W CW	Pass See Typical Characteristics		
5	Recovery Time:	100 ns Typical	Pass See Typical Characteristics		
6	Max.CW Input Power:	100 Watt CW Max. @-55°C to +85°C	Pass See Typical Characteristics		
7	Max. Pulsed Peak Power Handling:	1KW Peak (0.1% Duty Cycle, 1µs Pulse Width)	Pass See Typical Characteristics		
8	Limiting Threshold (P1DB):	+5 dBm Min.	6 dB		PMI QA 2

QA/QC Approval: \_\_\_\_\_

PMI  
QA 2



Date: \_\_\_\_\_

7/30/2021



# SUMMARY TEST DATA ON LM-20M18G-100W-15DBM

PL33234/2130

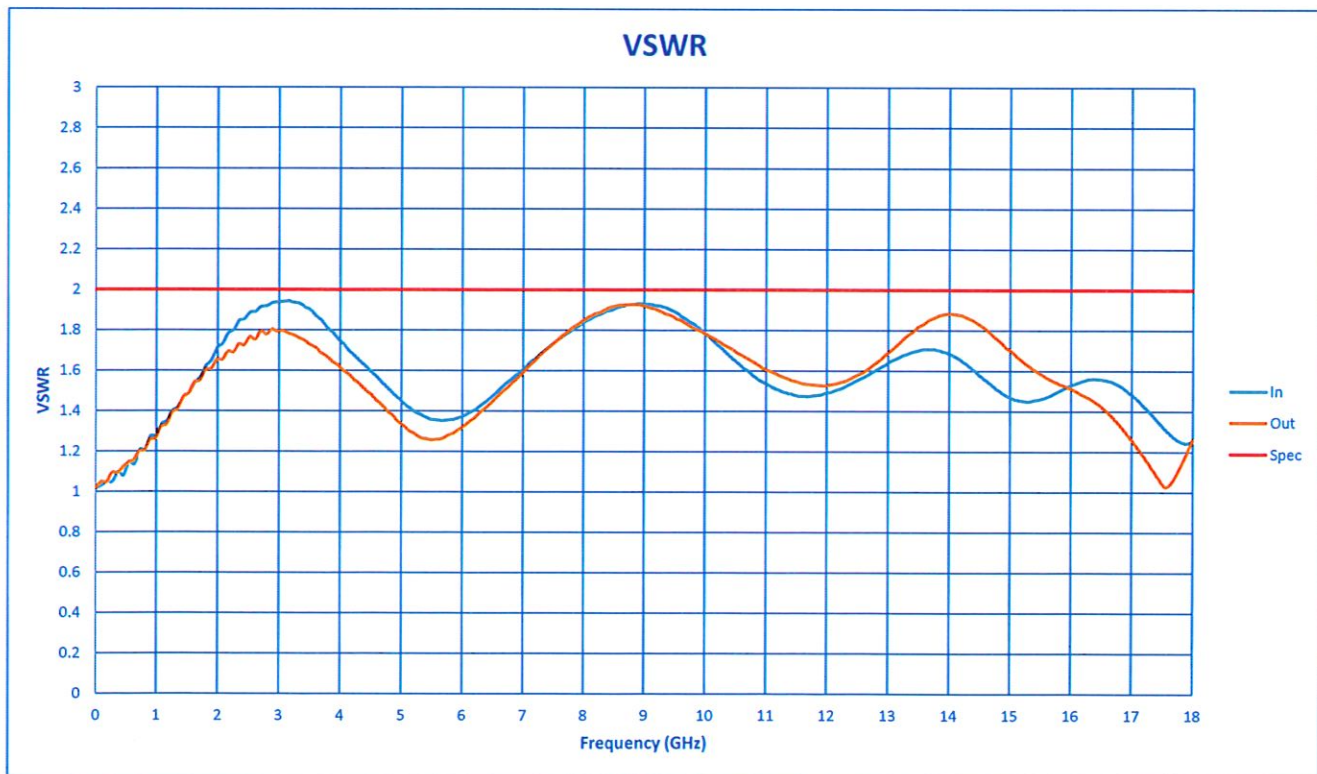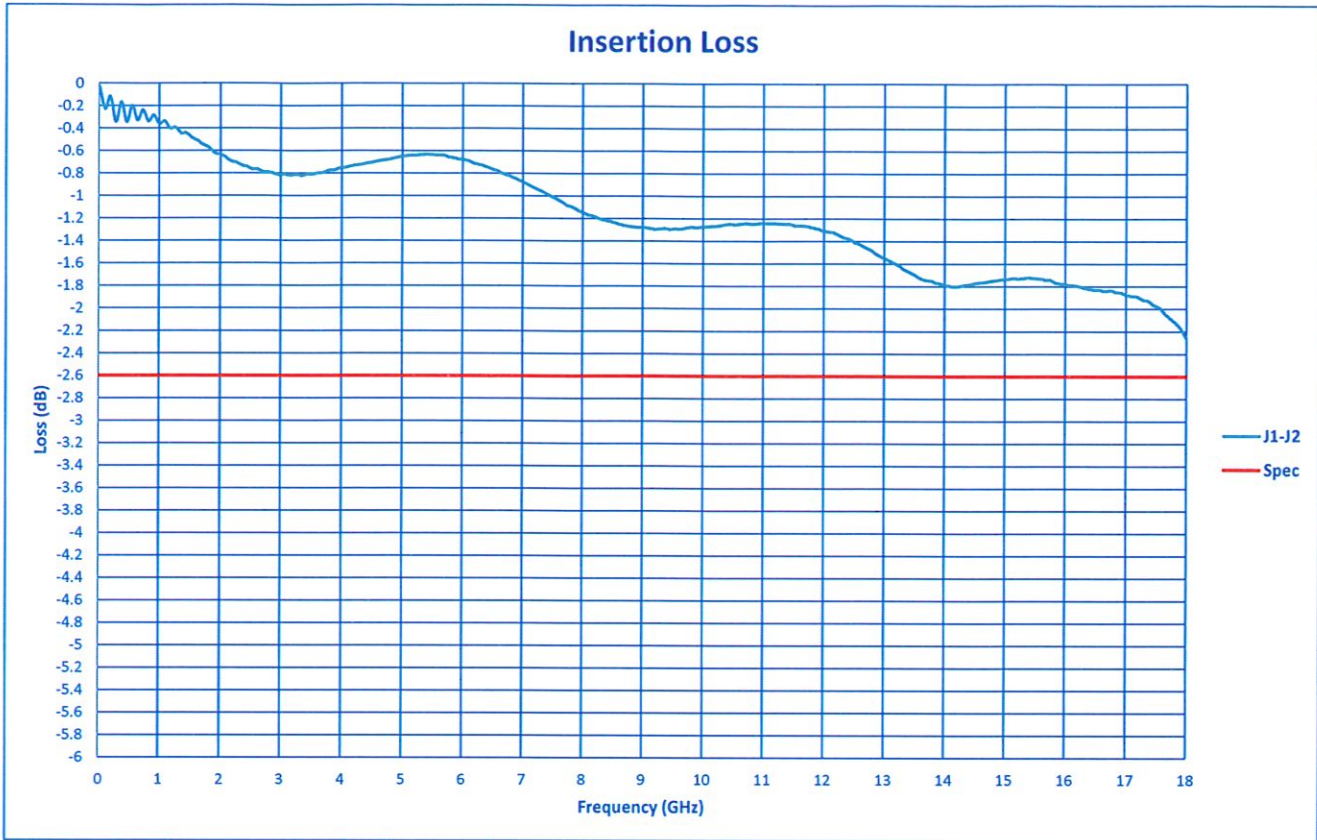

# SUMMARY TEST DATA ON LM-20M18G-100W-15DBM

