



## SUMMARY TEST DATA ON P2T-500M18G-80-T-515-SFF-4W-ST

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P2T-500M18G-80-T-515-SFF-4W-ST  
 Serial No: PL33240/2130

Tested By: K. Wagaman  
 Temperature: 25 Degrees C  
 Date: 7/30/2021  
 Drawing No: 27630243      Rev: B2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	0.5 to 18.0 GHz	0.5 to 18.0 GHz	PMI QA 2	
2	Insertion Loss:	3.5 dB Typ.	3.3 dB See Plot		
3	Isolation:	70 dB Min.	77 dB See Plot		
4	VSWR:	2.0:1 Max.	1.8:1 See Plot		
5	Operating Input Power:	4 Watts CW Max.	Pass See Typical Characteristics		
6	Switching Speed:	60 ns Max.	<40 ns See Typical Characteristics		
7	Power Supply:	+5 VDC @ 150 mA -15 VDC @ 150 mA	+5 VDC @ 61 mA -15 VDC @ 77 mA		
8	Control:	Logic Table			Pass
		CTL1	Function	PMI QA 2	
		1	J1-J2		
0	J1-J3				

QA/QC Approval: \_\_\_\_\_

PMI  
QA 2

Date: \_\_\_\_\_




7/30/2021

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
 Email: sales@pmi-rf.com



# SUMMARY TEST DATA ON P2T-500M18G-80-T-515-SFF-4W-ST



PL33240/2130

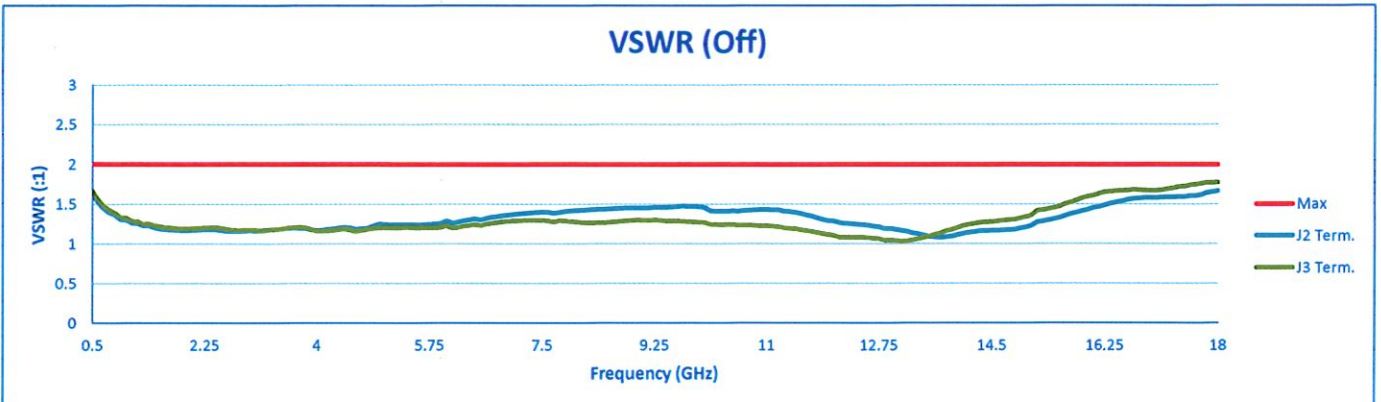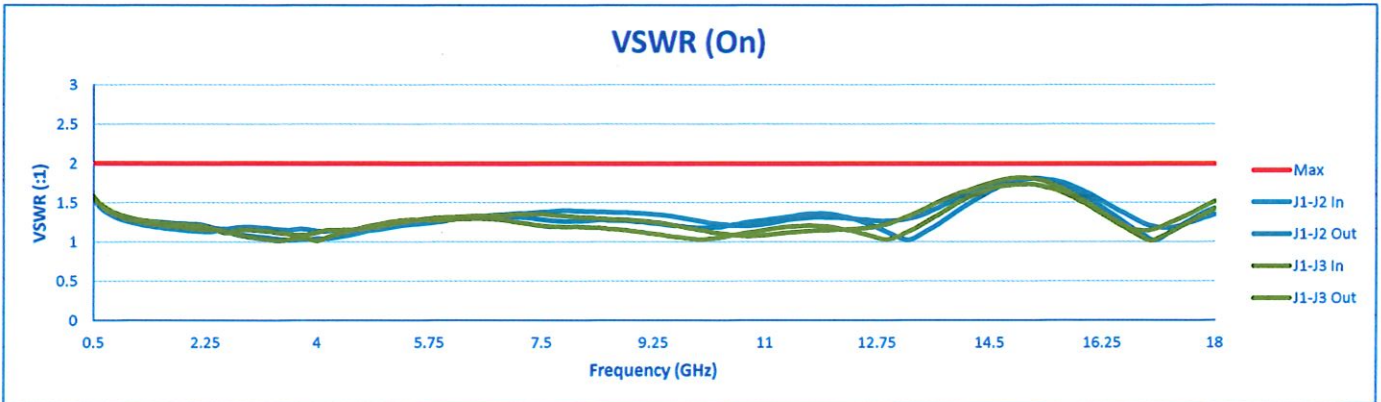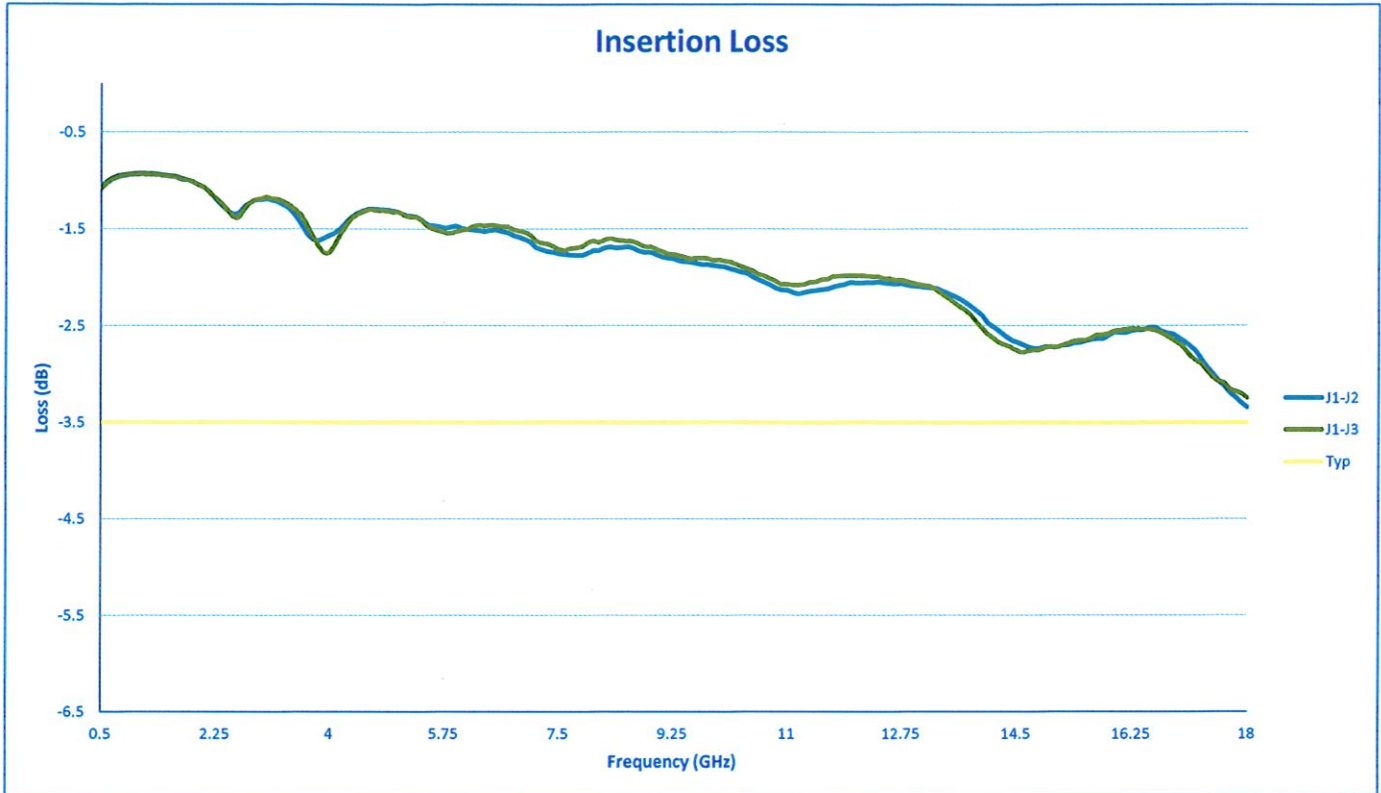



# SUMMARY TEST DATA ON P2T-500M18G-80-T-515-SFF-4W-ST

PL33240/2130

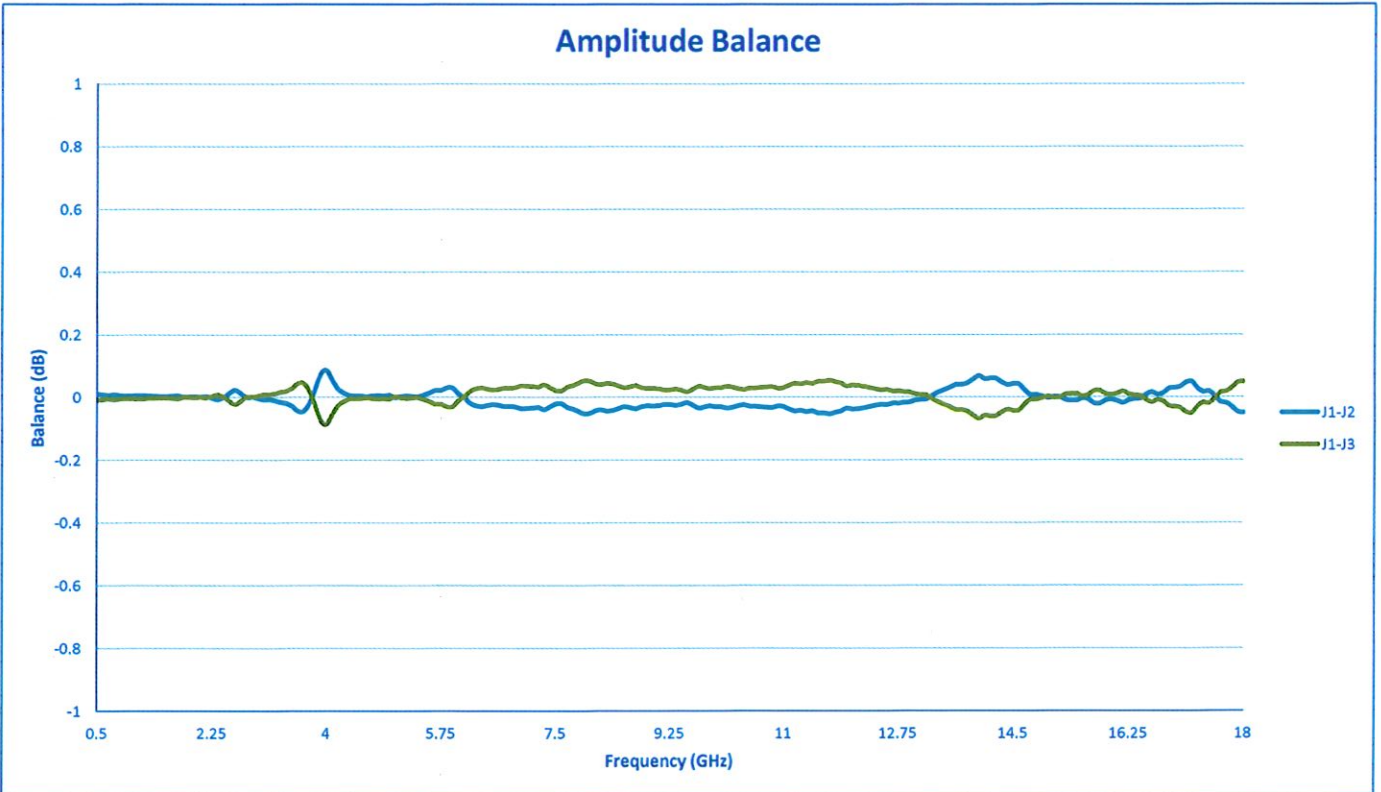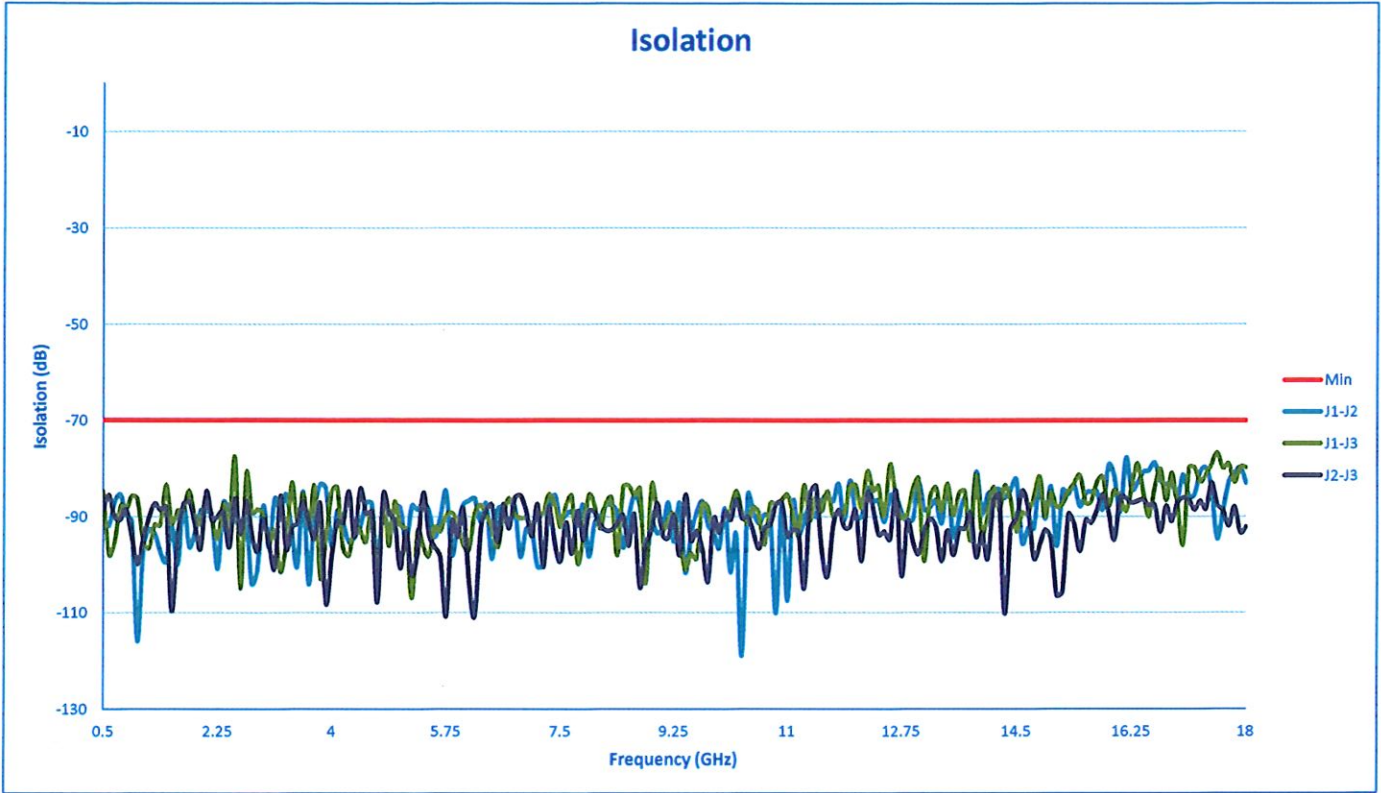

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@pmi-rf.com