



SUMMARY TEST DATA ON SAMPLE AMPLIFIER


Customer :
Job No :
Model No : PE2-28-6R418-4R0-15-9-SFF
Serial No : PL3364

Tested By : Kevin Mason
Temperature : +25°C
Date : 6/27/07

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Frequency Range:	6.4-18.0 GHz	Pass	
2	Gain:	+26dB Typ.	Pass (See Plot)	
3	Gain Flatness:	±1.25dB Typ.	±0.9dB	
4	Psat:	+13dBm Typ.	See Following Table	
5	In-Band Harmonic Rejection:	-14dBc Typ.	Pass	
6	VSWR:	Input : 2.0:1 Output: 2.0:1 (Max.)	Pass (See Plot)	
7	Noise Figure:	5.75dB Max.	Pass	
8	DC Supply:	250mA@ +9VDC Max.	130mA	
9	Input Power:	+20dBm CW Max.	Pass	

5715 Industry Lane, Unit 11, Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 email: sales@planarelec.com

S-Parameter Plot

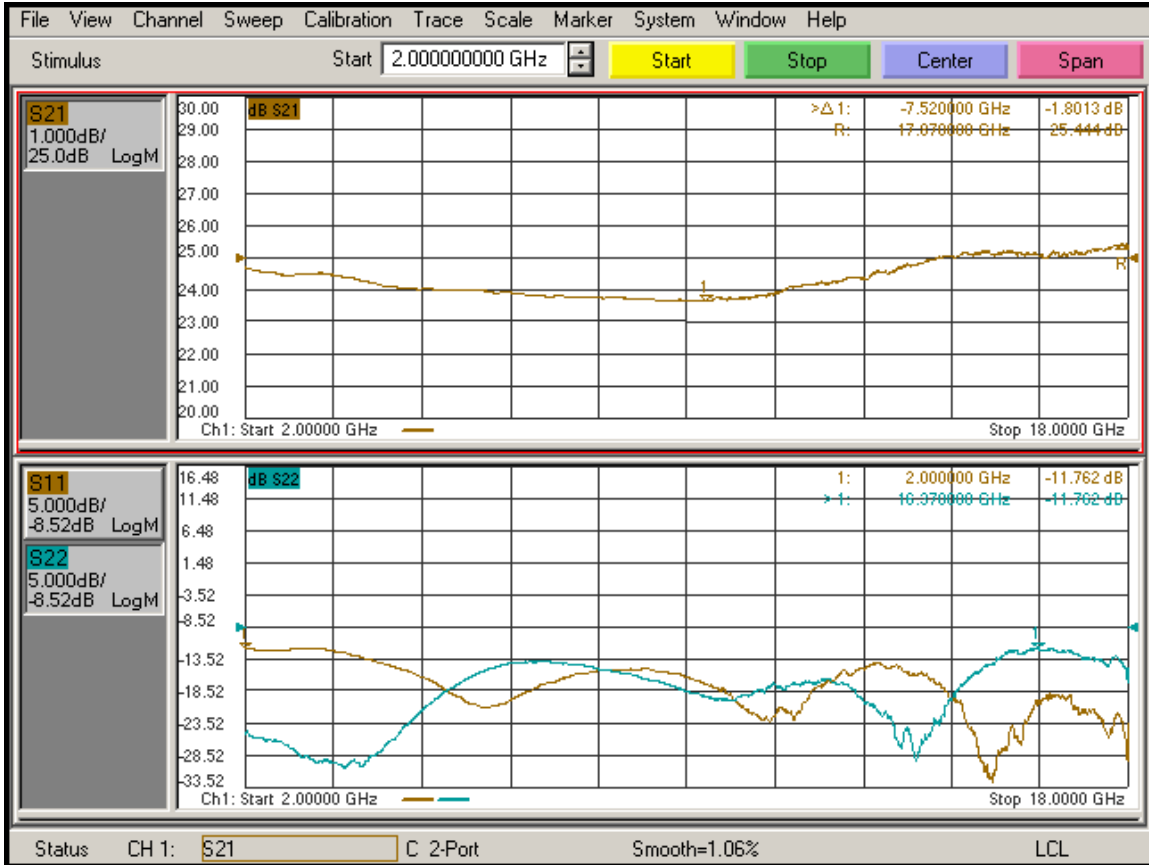

Saturated Output Power Measurements:

Pin = -25dBm

Frequency (GHz)	6.4	10.0	12.0	16.0	18.0
Power (dBm)	-1.2	-1.7	-1.6	-1	-0.9

Pin = -5dBm

Frequency (GHz)	6.4	10.0	12.0	16.0	18.0
Power (dBm)	10.2	9.3	10.7	9.7	8.6

Pin = +4dBm

Frequency (GHz)	6.4	10.0	12.0	16.0	18.0
Power (dBm)	11.1	9.4	11.5	9.9	9.2