



**SUMMARY TEST DATA
ON
LM-1G18G-16-4W-SMF**

Customer: _____

SO No: _____

Model No: LM-1G18G-16-4W-SMF

Serial No: PL34008/2139

Part No: _____

Tested By: John R

Temperature: +25°C

Date: 9/28/2021

Drawing No: 27634041 REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	1.0 to 18.0 GHz	1.0 to 18.0 GHz	PMI QA1
2	Insertion Loss:	2.3 dB Max. @ -10 dBm Input Power	1.81 dB See Plot	
3	Leakage Power:	40 mW Max.	Pass See Typical Characteristics	
4	Spike Leakage:	0.1 erg. Max.	Pass See Typical Characteristics	
5	Recovery Time:	250 ns Max. @ 1000 W Peak Power	Pass See Typical Characteristics	
6	VSWR:	2.0:1 Max. @ -10 dBm Input Power	1.84:1 See Plot	
7	RF Power Handling:	4 W CW Max.	Pass See Typical Characteristics	
		1000 W Peak Min. (1 μ s PW, 0.1% DC)	Pass See Typical Characteristics	
8	Limiting Threshold:	+5 dBm Min. (1 dB Compression)	+9 dBm See Plot	PMI QA1

QA/QC Approval: _____

PMI
QA1

Date: _____

9/28/21


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com




SUMMARY TEST DATA ON LM-1G18G-16-4W-SMF

PL34008/2139

Insertion Loss

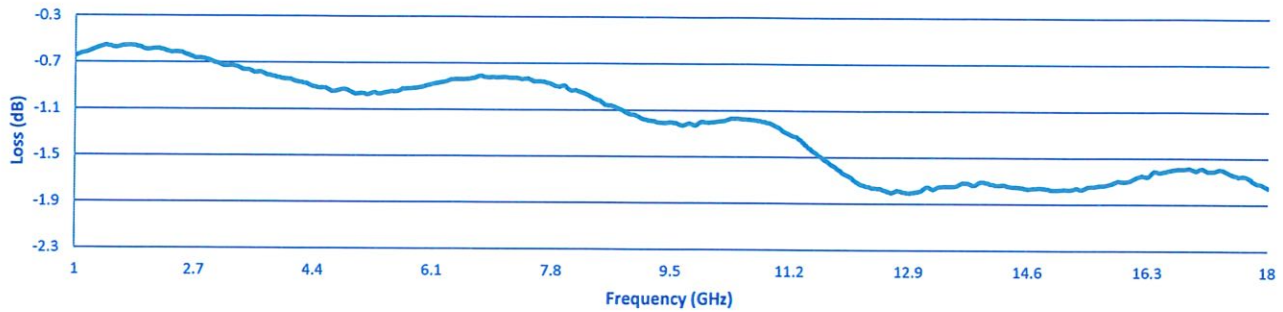

VSWR

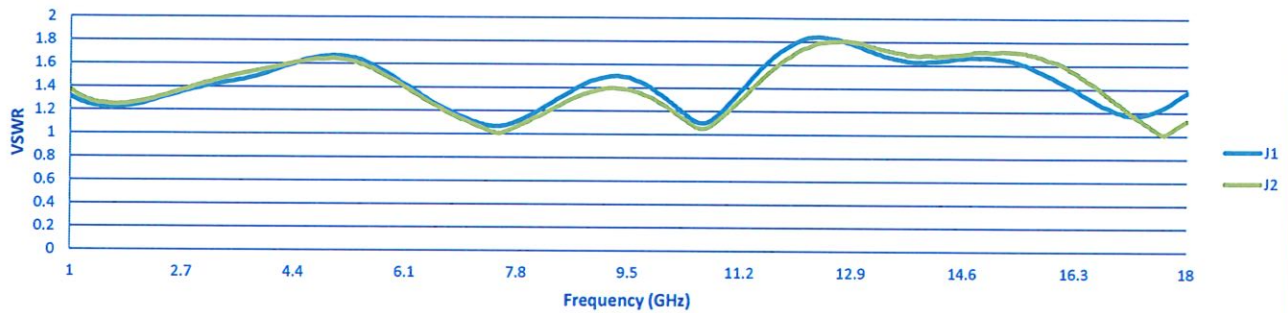

Limiter Response with Frequency

