



**SUMMARY TEST DATA
ON
P4T-16-80-T-55-SFF**

Customer: _____
SO No: _____
Model No: P4T-16-80-T-55-SFF
Serial No: PL34832/2147

Tested By: E. Kretz
Temperature: +25°C
Date: 11/29/2021
Drawing No: 27642300 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	1 to 6 GHz	1 to 6 GHz	PMI QA 2	
2	Insertion Loss:	1.5 dB GOAL / 2.0 dB MAX	1.8 dB See Plot		
3	Isolation:	80 dB MIN	88.79 dB See Plot		
4	VSWR: In/Out	1.8:1 Max	1.4:1 See Plot		
5	Switching Speed:	200ns MAX	See Typical Characteristics		
6	Power Supply:	+5 VDC @ 200mA MAX -5 VDC @ 100mA MAX	+5 VDC @ 118 mA -5 VDC @ 60 mA		PMI QA 2

QA/QC Approval: _____





PMI
QA 2

Date: 11/30/2021



SUMMARY TEST DATA ON P4T-16-80-T-55-SFF

PL34832/2147

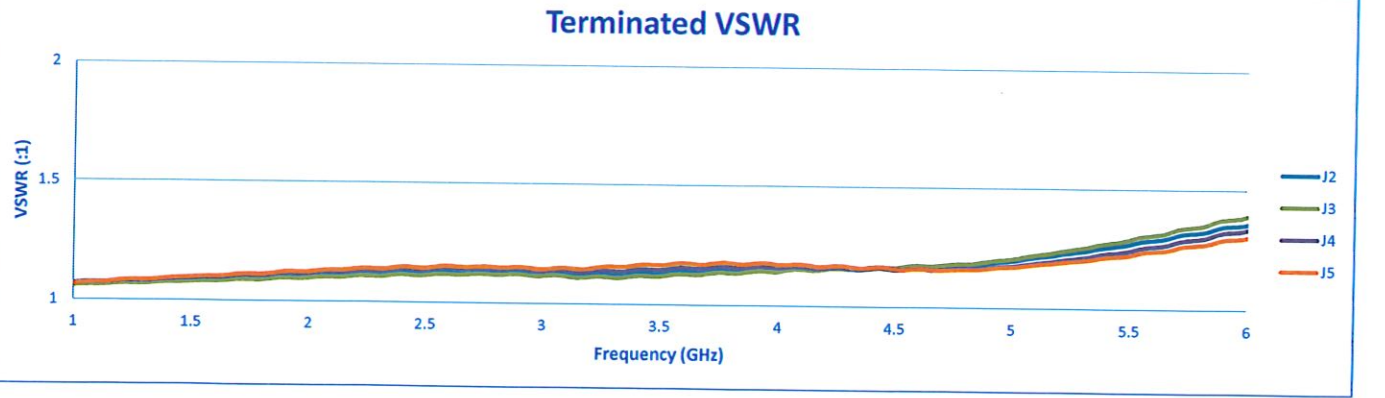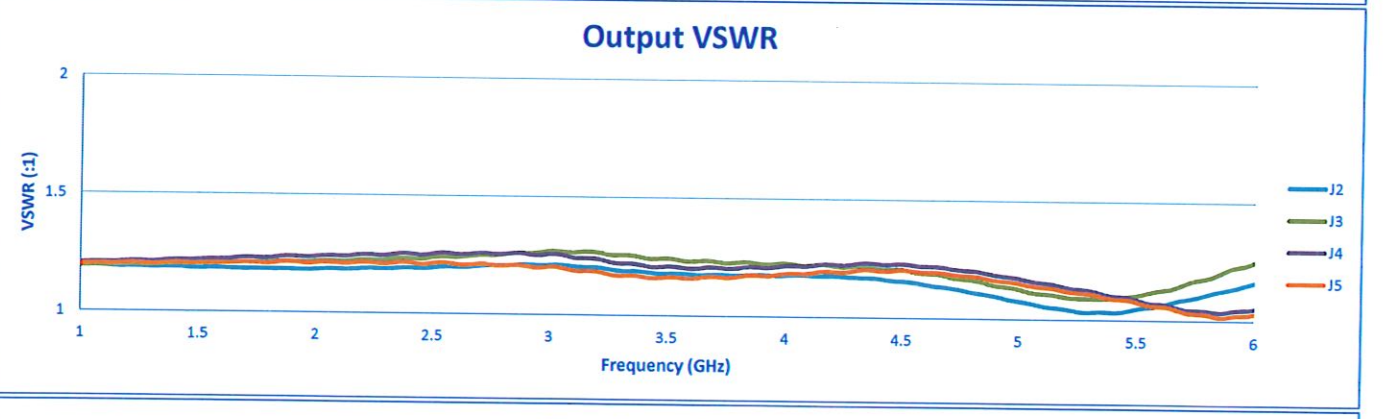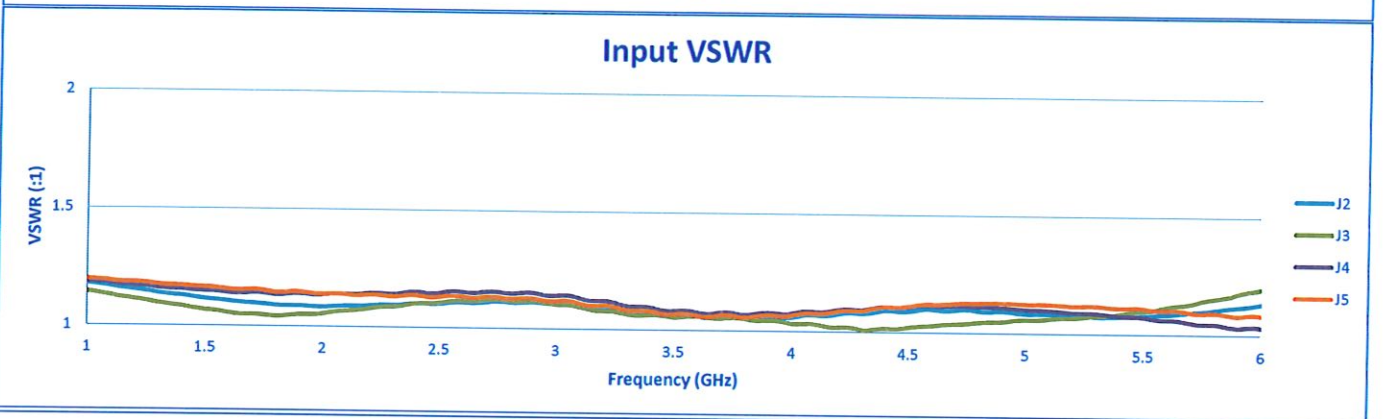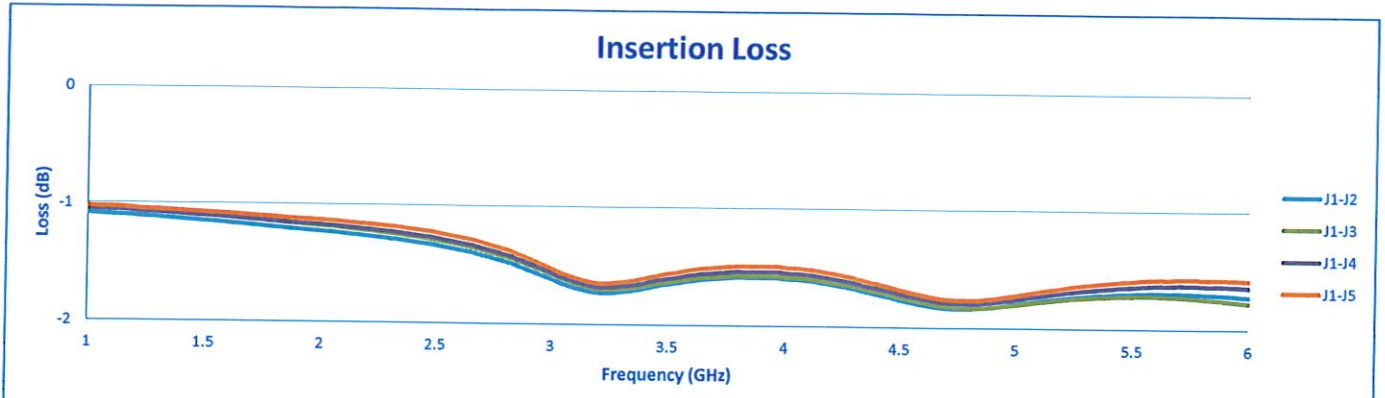



SUMMARY TEST DATA ON P4T-16-80-T-55-SFF

PL34832/2147

