



**SUMMARY TEST DATA  
ON  
P2T-1R2G1R4G-60-T-SFF**

Customer: \_\_\_\_\_  
SO No: \_\_\_\_\_  
Model No: P2T-1R2G1R4G-60-T-SFF  
Serial No: PL34935/2149

Tested By: J.ALEXIS  
Temperature: +25° C  
Date: 12/8/2021  
Drawing No: 27630501 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	1.2 GHz to 1.4 GHz	1.2 GHz to 1.4 GHz	PMI QA 2	
2	Impedance	50 Ohms	Pass		
3	Input Power	20 dBm CW Max.	See Typical Characteristics		
4	Survival Power	30 dBm CW Max.	See Typical Characteristics		
5	VSWR: In/Out	1.5:1 Max.	1.23:1 In 1.24:1 Out		
6	Insertion Loss	1 dB Max.	1 dB		
7	Isolation	60 dB Min.	80.3 dB		
8	Switching Speed	100 ns Max.	See Typical Characteristics		
9	DC SUPPLY	+5VDC @ 100 mA Max. -15VDC @ 100 mA Max.	+5VDC @ 23 mA -15VDC @ 57 mA		PMI QA 2




QA/QC Approval: \_\_\_\_\_

PMI  
QA 2

Date: 12/9/2021

# SUMMARY TEST DATA ON P2T-1R2G1R4G-60-T-SFF

PL34935/2149

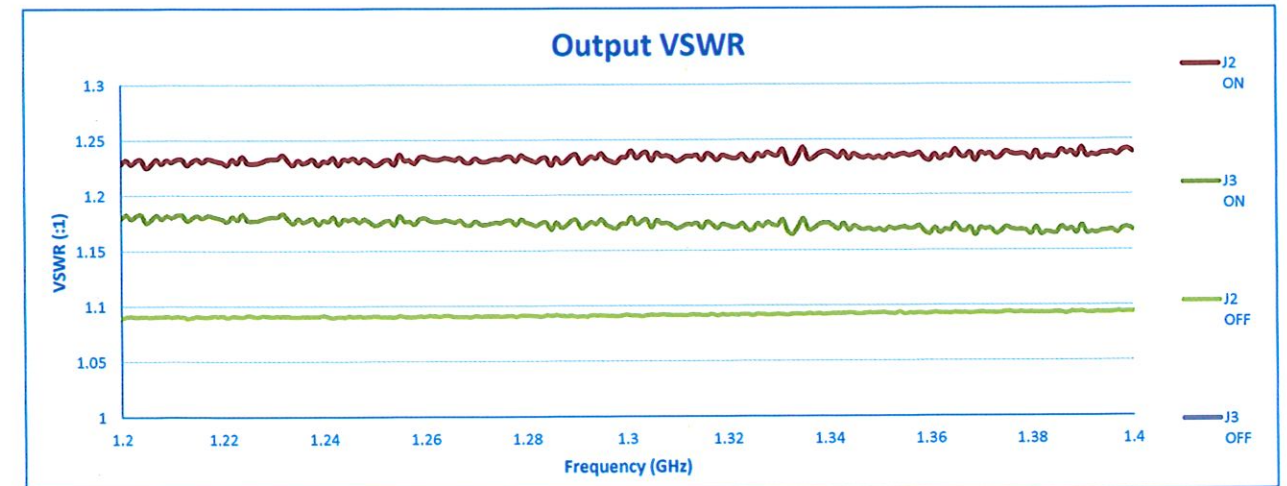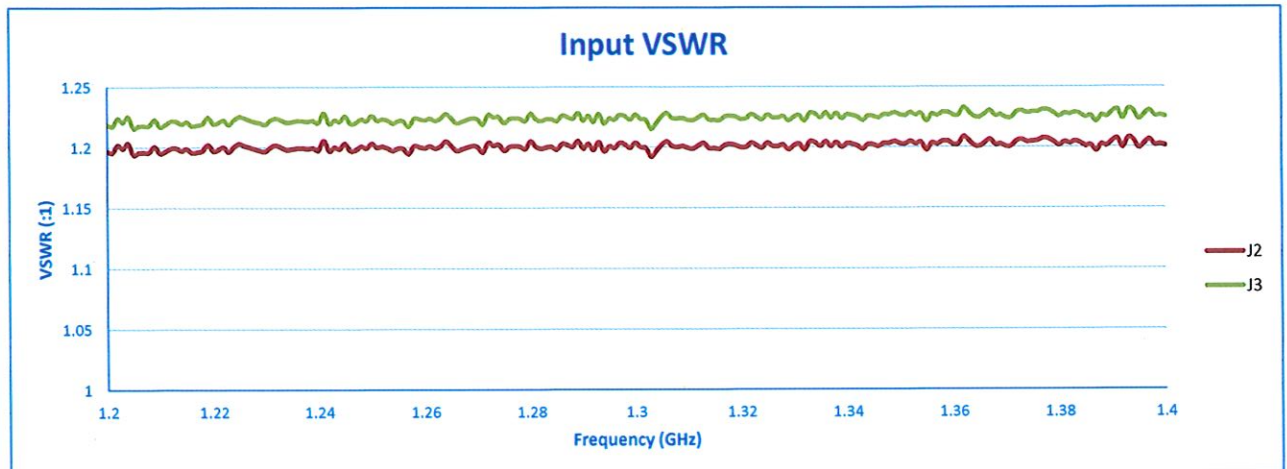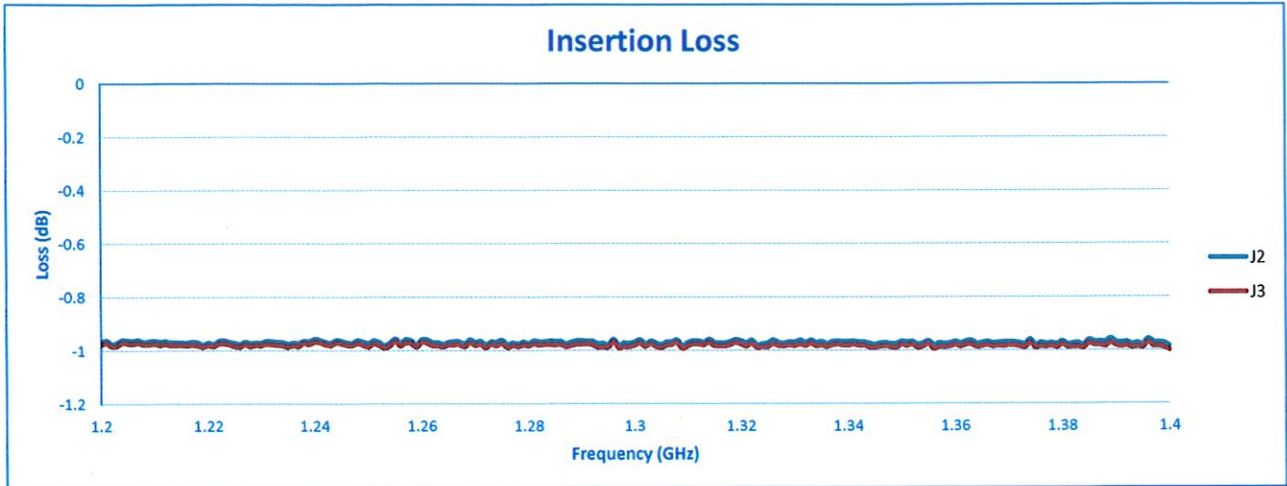

SUMMARY TEST DATA  
ON  
P2T-1R2G1R4G-60-T-SFF

PL34935/2149

