



**SUMMARY TEST DATA
ON
P4T-50M40G-55-T-292FF**

PL35144/2150

Customer: _____ Tested By: L. McGraw
SO No: _____ Temperature: +25°C
Model No: P4T-50M40G-55-T-292FF Date: 12/17/2021
Serial No: PL35144/2150 Drawing No: 27618988 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	50MHz to 40GHz	50MHz to 40GHz	PMI QA 2
2	Insertion Loss:	8dB Max	5.63 dB (See Plot)	
3	Isolation	55dB Min	71 dB (See Plot)	
4	VSWR:	2.5:1 Max	2.48:1 (See Plot)	
5	Speed:	50% TTL to 10%/90% RF 85ns Typ, 100ns Max	<20ns See Typical Characteristics	
6	Input Power:	+20dBm CW	Pass See Typical Characteristics	
7	Survival Power:	0.5W CW, 5W Peak, 1us	Pass See Typical Characteristics	
8	Control TTL	4 Line Independent Logic "0" = Insertion Loss Logic "1" = Isolation	Pass	
9	Power Supply:	+12 to +15VDC @ 150mA * -12 to -15VDC @ 100mA *	127mA 92mA	PMI QA 2

*Voltage Regulation & Reverse Bias Protection Included

QA/QC Approval:  PMI QA 2 Date: 12/17/2021


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com




SUMMARY TEST DATA ON P4T-50M40G-55-T-292FF

PL35144/2150

(J1-J2) Insertion Loss and Return Loss

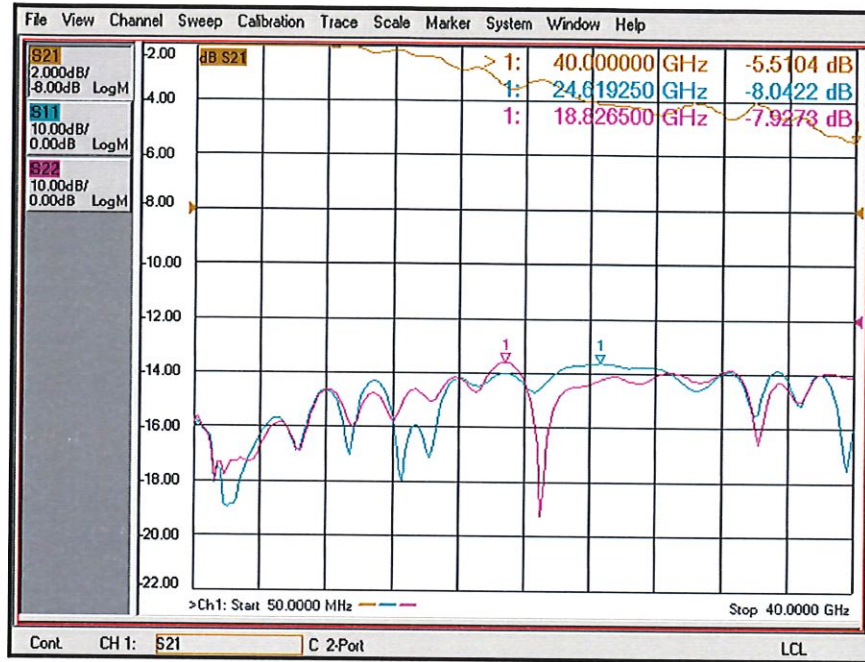

(J1-J3) Insertion Loss and Return Loss

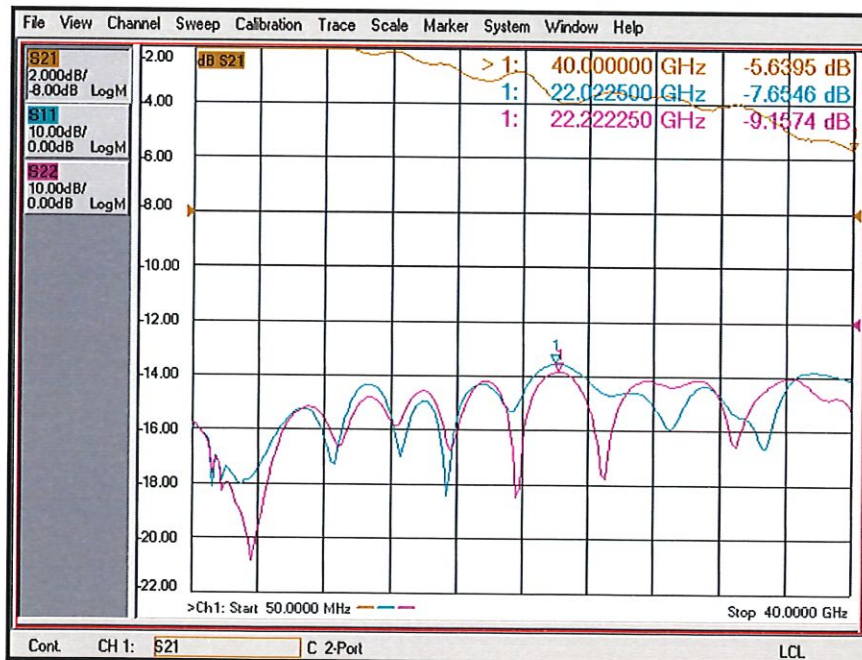





**SUMMARY TEST DATA
ON
P4T-50M40G-55-T-292FF**

PL35144/2150

(J1-J4) Insertion Loss and Return Loss

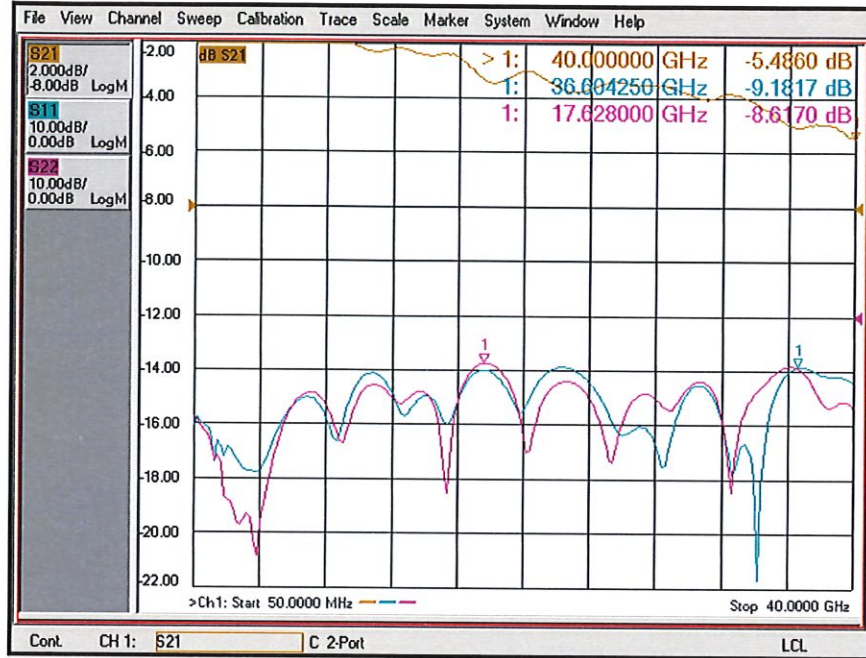

(J1-J5) Insertion Loss and Return Loss

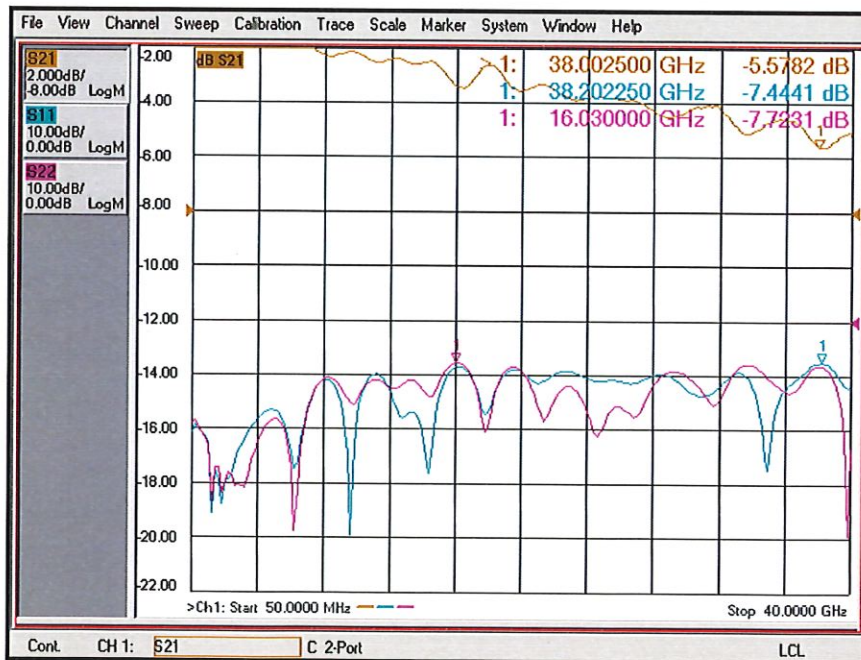





**SUMMARY TEST DATA
ON
P4T-50M40G-55-T-292FF**

PL35144/2150

(J1 – J2) Isolation and Termination Return Loss

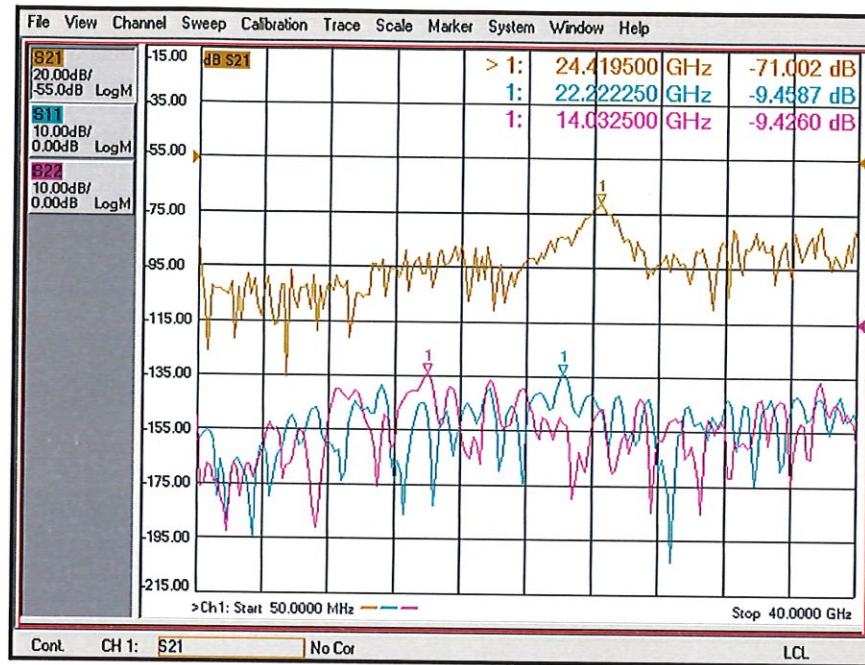

(J1 – J3) Isolation and Termination Return Loss

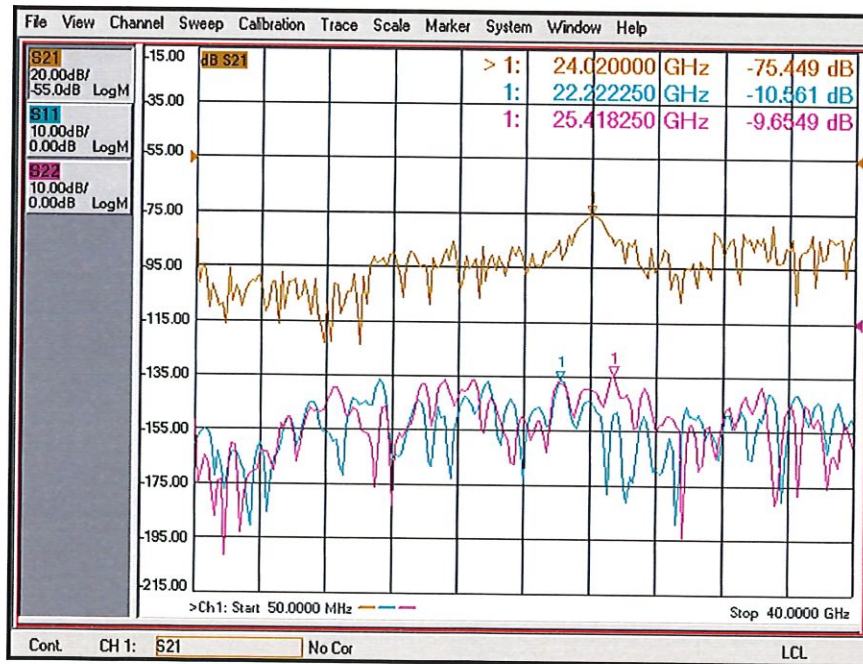




**SUMMARY TEST DATA
ON
P4T-50M40G-55-T-292FF**

PL35144/2150

(J1 – J4) Isolation and Termination Return Loss

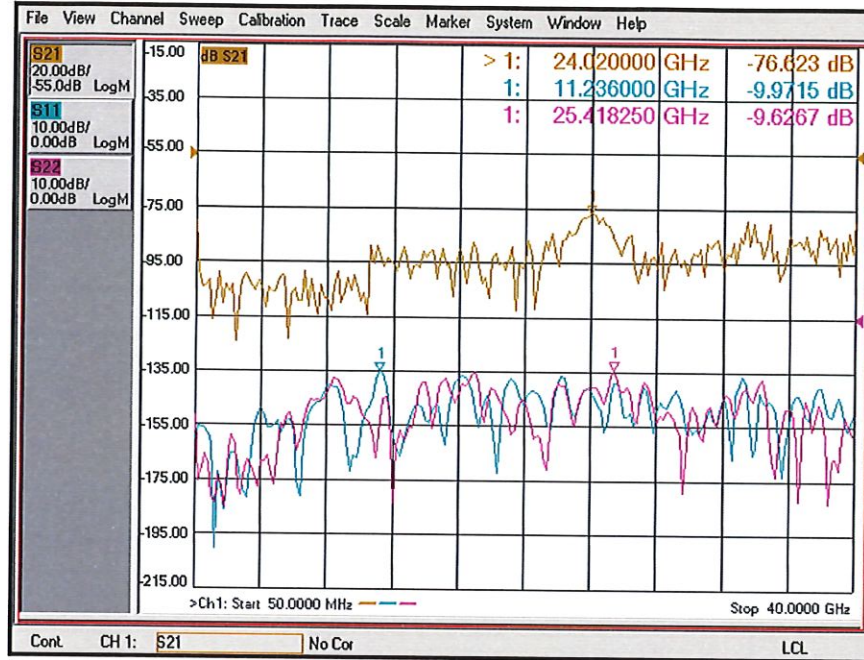

(J1 – J5) Isolation and Termination Return Loss

