



# SUMMARY TEST DATA ON P2T-218-60-515-R-SFF

Customer: \_\_\_\_\_  
SO No: \_\_\_\_\_  
Model No: P2T-218-60-515-R-SFF  
Serial No: PL36072/2214

Tested By: A. Lopez  
Temperature: +25°C  
Date: 3/28/2022  
Drawing No: 27643300 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 GHz to 18.0 GHz	2.0 GHz to 18.0 GHz	PMI QA 2
2	Insertion Loss:	1.80 dB Max.	1.78 dB See Graph	
3	Isolation:	60 dB Min.	60.12 dB See Graph	
4	VSWR:	1.9:1 Max.	1.42 See Graph	
5	Switching Speed:	30 ns Max.	Pass See Typical Characteristics	
6	Input Power:	1W CW / 2W PEAK MAX	Pass See Typical Characteristics	
7	DC Supply:	+5 VDC @ 65 mA Max. -15 VDC @ 65 mA Max.	+5 VDC @ 48 mA -15 VDC @ 17 mA	
8	Control:	TTL "0" → (J1-J2) TTL "1" → (J1-J3)	Pass	

QA/QC Approval: \_\_\_\_\_


PMI  
QA 2

Date: 3/30/2022




# SUMMARY TEST DATA ON P2T-218-60-515-R-SFF

## Insertion Loss

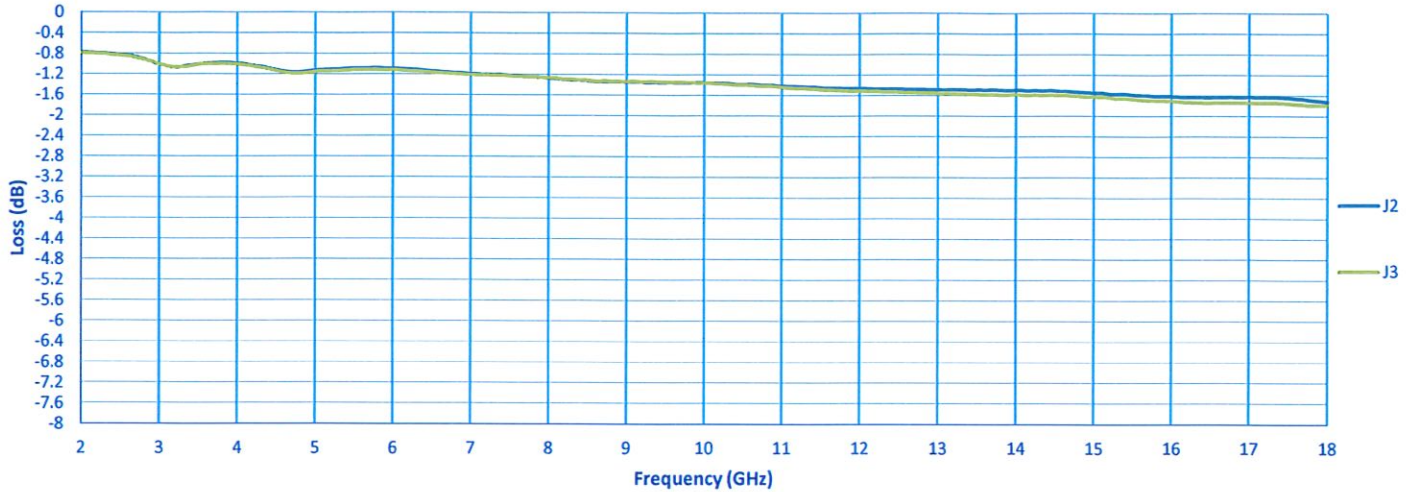

## VSWR

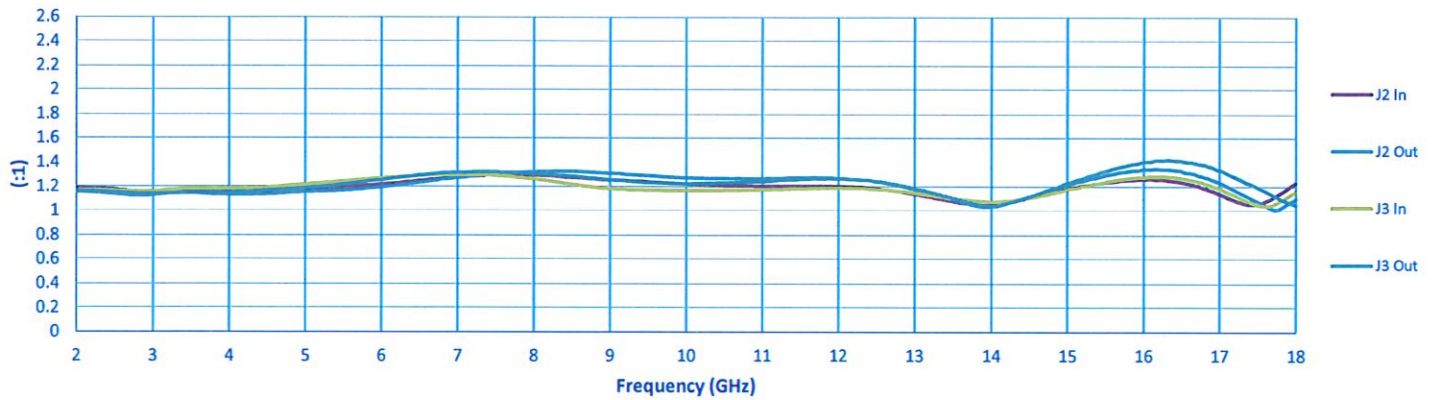

## Isolation

