



SUMMARY TEST DATA ON P2T-218-60-515-R-SFF

Customer: _____
SO No: _____
Model No: P2T-218-60-515-R-SFF
Serial No: PL36074/2214

Tested By: A. Lopez
Temperature: +25°C
Date: 3/28/2022
Drawing No: 27643300 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 GHz to 18.0 GHz	2.0 GHz to 18.0 GHz	PMI QA 2
2	Insertion Loss:	1.80 dB Max.	1.77 dB See Graph	
3	Isolation:	60 dB Min.	60.21 dB See Graph	
4	VSWR:	1.9:1 Max.	1.44 See Graph	
5	Switching Speed:	30 ns Max.	Pass See Typical Characteristics	
6	Input Power:	1W CW / 2W PEAK MAX	Pass See Typical Characteristics	
7	DC Supply:	+5 VDC @ 65 mA Max. -15 VDC @ 65 mA Max.	+5 VDC @ 48 mA -15 VDC @ 17 mA	
8	Control:	TTL "0" → (J1-J2) TTL "1" → (J1-J3)	Pass	

QA/QC Approval: _____


PMI
QA 2

Date: 3/30/2022




SUMMARY TEST DATA ON P2T-218-60-515-R-SFF

Insertion Loss

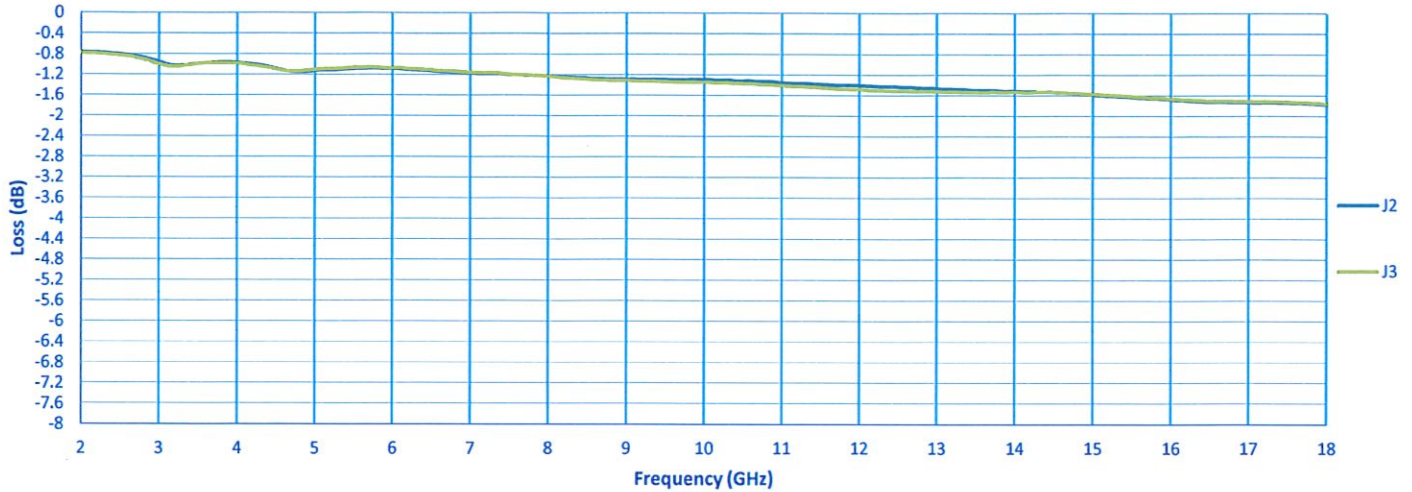

VSWR

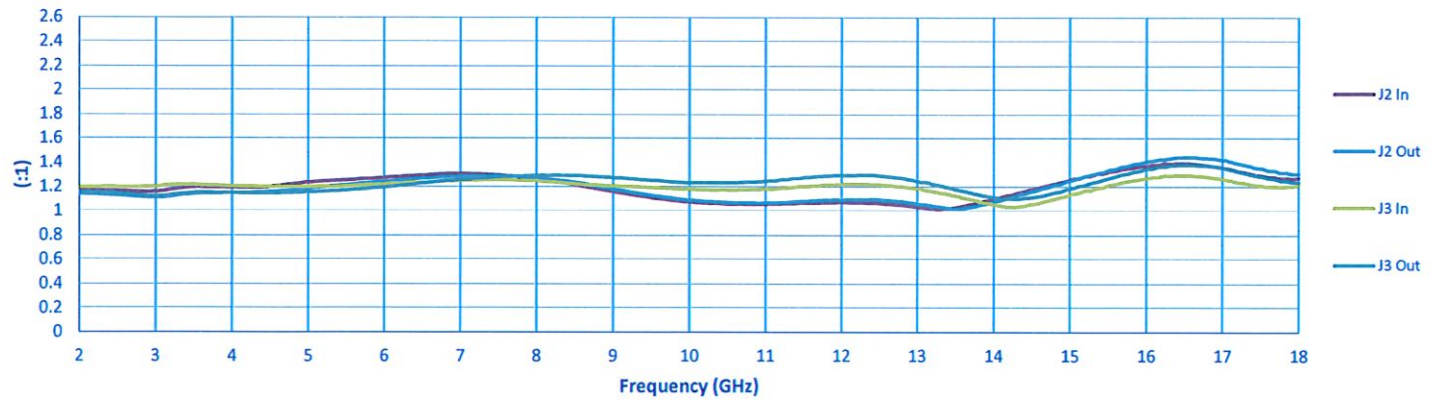

Isolation

