



**SUMMARY TEST DATA
ON
P1T-500M18G-85-T-SFF**

PL36427/2218

Customer: _____ Tested By: L. McGraw
SO No: _____ Temperature: +25°C
Model No: P1T-500M18G-85-T-SFF Date: 04/28/2022
Serial No: PL36427/2218 Drawing No: 2 762386.7 Rev: A2

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	500 MHz to 18 GHz	500 MHz to 18 GHz See Plot	PMI QA 2	
2	Isolation:	85dB Min.	89dB See Plot		
3	Insertion Loss:	5.0dB Typ.	3.9dB See Plot		
4	VSWR: (In/Out)	2.5:1 Typ.	2.4:1 See Plot		
5	Input Power:	+20dBm CW Max.	Pass		
6	RF Switching Speed: (10% to 90% RF)	25ns Typ.	25ns See Typical Characteristics		
7	DC Voltage:	+5VDC, 20mA Typ. -5VDC, 70mA Typ.	+5VDC, 21 mA -5VDC, 65 mA		
8	Control Signal:	TTL Compatible "0" = Insertion Loss "1" = Isolation	Pass		PMI QA 2

QA/QC Approval:

PMI
QA 2

Date:

4/28/2022




**SUMMARY TEST DATA
ON
P1T-500M18G-85-T-SFF**

PL36427/2218

J1-J2 Insertion Loss and Return Loss



J1 J2 Isolation and Return Loss

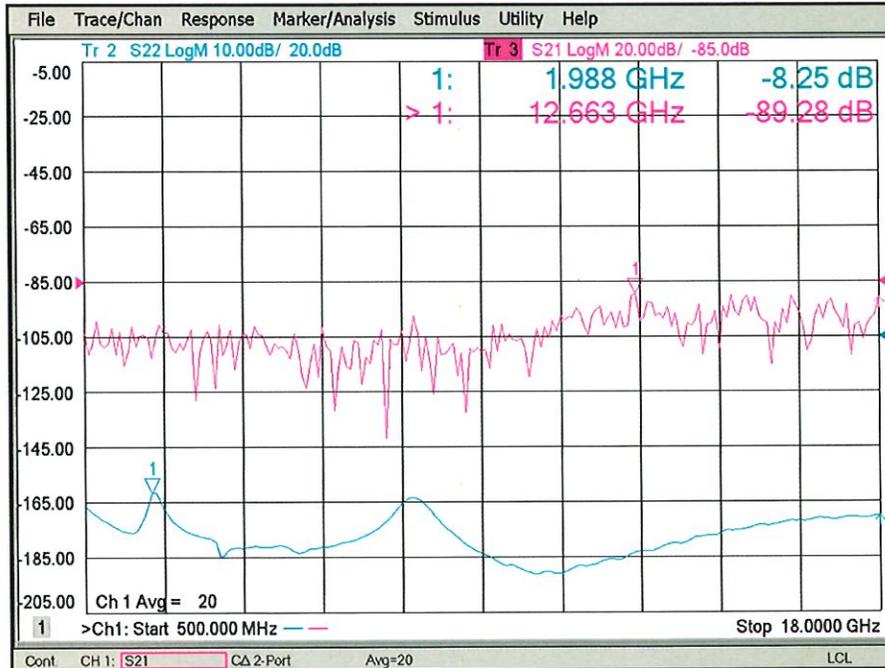

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com