



**SUMMARY TEST DATA
ON
P1T-500M18G-85-T-SFF**

PL36437/2218

Customer: _____ Tested By: L. McGraw
SO No: _____ Temperature: +25°C
Model No: P1T-500M18G-85-T-SFF Date: 04/28/2022
Serial No: PL36437/2218 Drawing No: 2 7623867 Rev: A2

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	500 MHz to 18 GHz	500 MHz to 18 GHz See Plot	PMI QA 2
2	Isolation:	85dB Min.	90dB See Plot	
3	Insertion Loss:	5.0dB Typ.	4.0dB See Plot	
4	VSWR: (In/Out)	2.5:1 Typ.	2.3:1 See Plot	
5	Input Power:	+20dBm CW Max.	Pass	
6	RF Switching Speed: (10% to 90% RF)	25ns Typ.	25ns See Typical Characteristics	
7	DC Voltage:	+5VDC, 20mA Typ. -5VDC, 70mA Typ.	+5VDC, 21 mA -5VDC, 65 mA	
8	Control Signal:	TTL Compatible "0" = Insertion Loss "1" = Isolation	Pass	PMI QA 2

QA/QC Approval: _____

PMI
Q A2

Date: _____


4/28/2022



**SUMMARY TEST DATA
ON
P1T-500M18G-85-T-SFF**

PL36437/2218

J1-J2 Insertion Loss and Return Loss

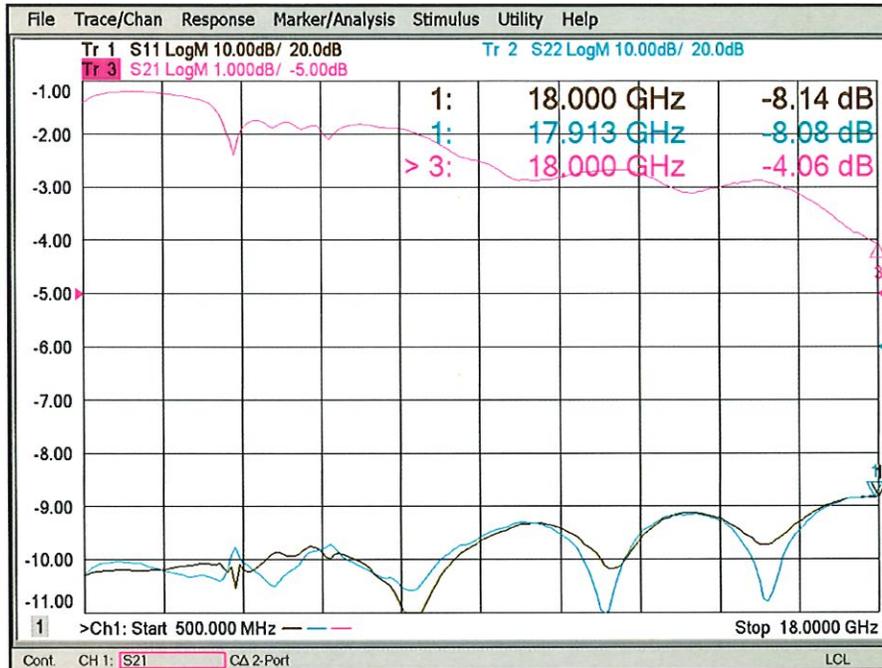

J1 J2 Isolation and Return Loss

