



SUMMARY TEST DATA ON SAMPLE AMPLIFIER


Customer :
Job No :
Model No : PE2-28-6R418-4R0-15-9-SFF
Serial No : PL3739

Tested By : Kevin Mason
Temperature : +25°C
Date : 10/31/07

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Frequency Range:	6.4-18.0 GHz	Pass	
2	Gain:	+26dB Typ.	Pass (See Plot)	
3	Gain Flatness:	±1.25dB Typ.	Pass	
4	Psat:	+13dBm Typ.	See Following Table	
5	In-Band Harmonic Rejection:	-14dBc Typ.	Pass	
6	VSWR:	Input : 2.0:1 Output: 2.0:1 (Max.)	Pass (See Plot)	
7	Noise Figure:	5.75dB Max.	Pass	
8	DC Supply:	250mA@ +9VDC Max.	Pass	
9	Input Power:	+20dBm CW Max.	Pass	

5715 Industry Lane, Unit 11, Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 email: sales@planarelec.com

S-Parameter Plot

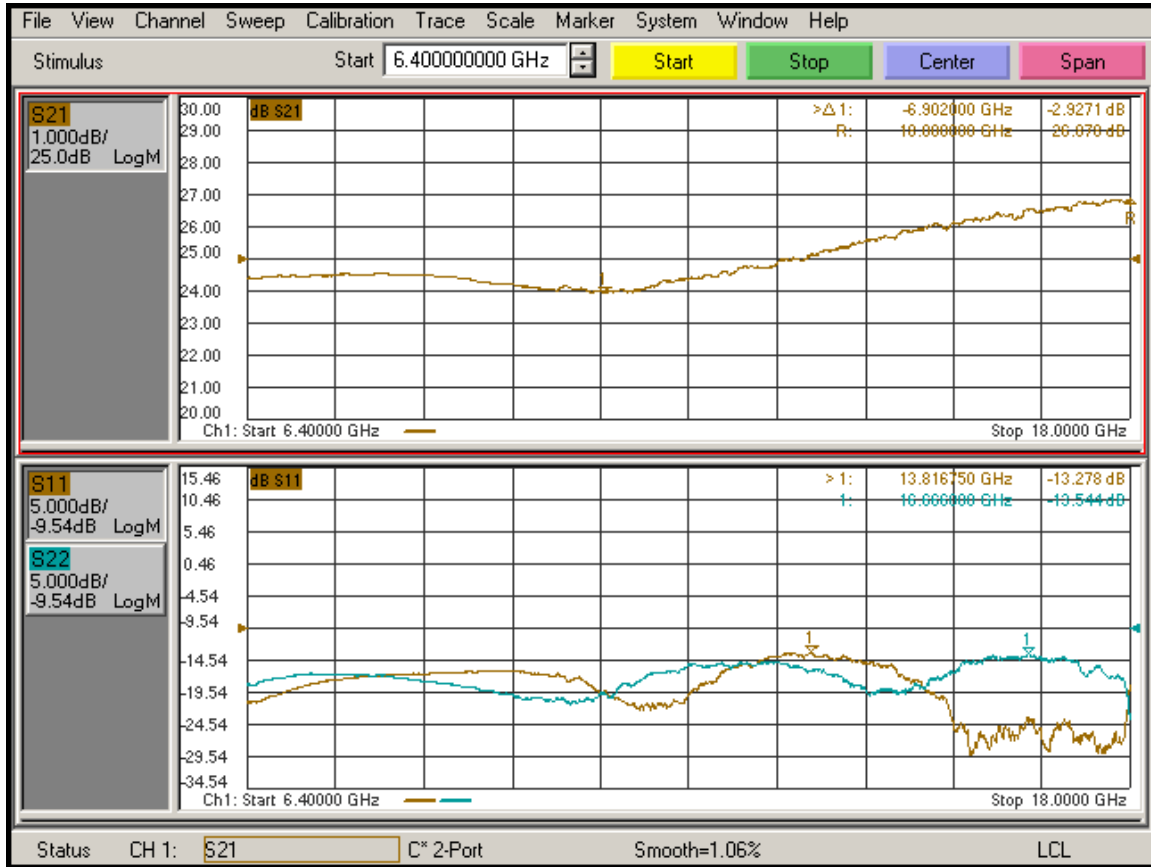

Saturated Output Power Measurements:

Pin = -25dBm

Frequency (GHz)	6.4	10.0	12.0	16.0	18.0
Spec Range	-3.2 to -0.2	-2.8 to 0.2	-3.0 to 0	-2.0 to 1.0	-2.0 to 1.0
Power (dBm)	-7	-1.1	-1.3	.3	.5

Pin = -5dBm

Frequency (GHz)	6.4	10.0	12.0	16.0	18.0
Spec Range	8.8 to 10.8	8.2 to 10.2	9.6 to 11.6	8.8 to 10.8	7.0 to 9.0
Power (dBm)	9.8	10.2	11.1	10.7	9.1

Pin = +4dBm

Frequency (GHz)	6.4	10.0	12.0	16.0	18.0
Spec Range	9.9 to 11.9	8.7 to 10.7	10.3 to 12.3	9.0 to 11.0	7.7 to 9.7
Power (dBm)	11.4	10.5	11.6	10.9	9.7