



**SUMMARY TEST DATA
ON
P2T-500M18G-80-T-515-SFF-4W-ST**

Customer: _____
 SO No: _____
 Model No: P2T-500M18G-80-T-515-SFF-4W-ST
 Serial No: PL37997/2239

Tested By: K Craven
 Temperature: 25 Degrees C
 Date: 9/30/2022
 Drawing No: 27630243 Rev: B2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 18.0 GHz	0.5 to 18.0 GHz	PMI QA1
2	Insertion Loss:	3.5 dB Typ.	2.6 dB See Plot	
3	Isolation:	70 dB Min.	77 dB See Plot	
4	VSWR:	2.0:1 Max.	1.7:1 See Plot	
5	Operating Input Power:	4 Watts CW Max.	Pass See Typical Characteristics	
6	Switching Speed:	60 ns Max.	<40 ns See Typical Characteristics	
7	Power Supply:	+5 VDC @ 150 mA -15 VDC @ 150 mA	+5 VDC @ 61 mA -15 VDC @ 77 mA	
8	Control:	Logic Table		
		CTL1	Function	
		1	J1-J2	
		0	J1-J3	
				PMI QA1




QA/QC Approval: *[Signature]* PMI QA1

Date: 9/30/2022



SUMMARY TEST DATA ON P2T-500M18G-80-T-515-SFF-4W-ST

PL37997/2239

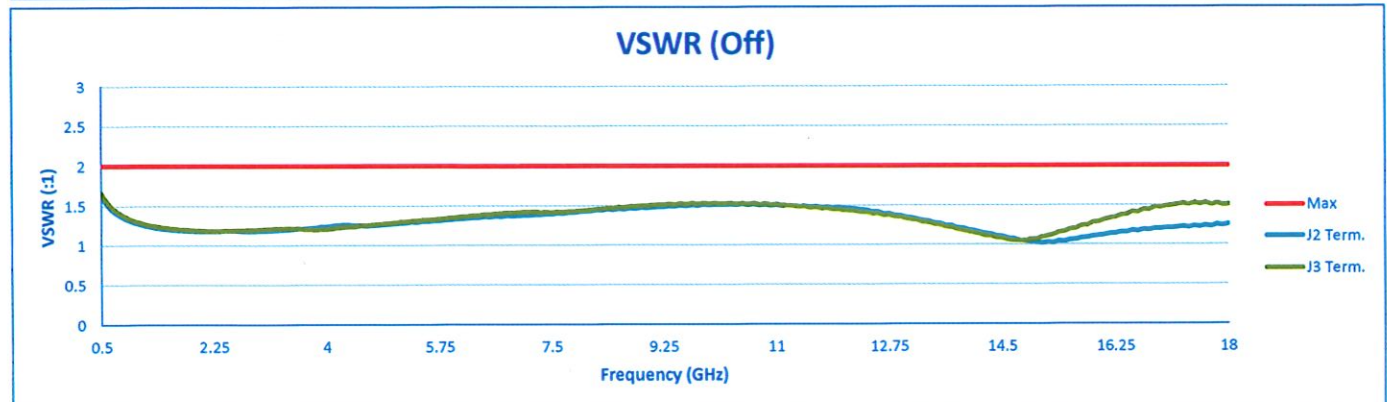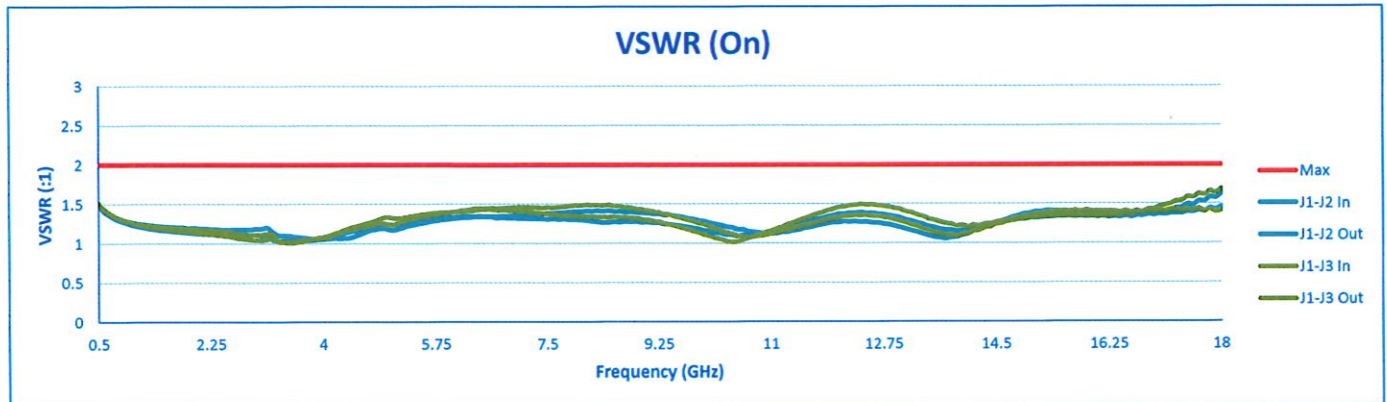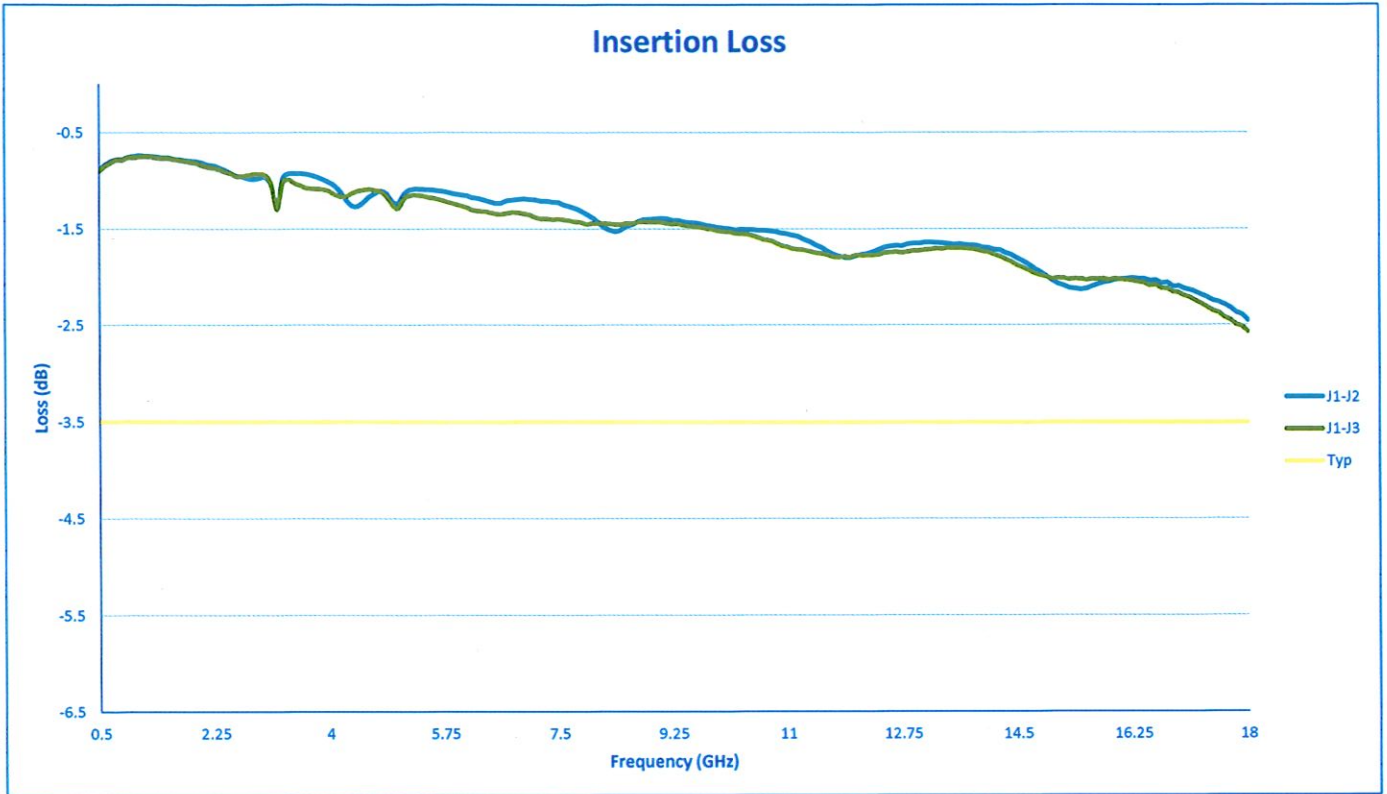



SUMMARY TEST DATA ON P2T-500M18G-80-T-515-SFF-4W-ST

PL37997/2239

