



**SUMMARY TEST DATA
ON
PDC-418-20-50W-SFF**

Customer: _____
SO No: _____
Model No: PDC-418-20-50W-SFF
Serial No: PL38133/2241

Tested By: Tin M. L
Temperature: +25°C
Date: 10/10/2022
Drawing No: 27040180 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	4 TO 18 GHz	4 TO 18 GHz	PMI QA2
2	Insertion Loss:	0.7 dB MAX (Excluding Coupled Power 0.04dB)	0.36 dB (See Plot)	
3	Coupling Factor:	20 ±0.7 dB MAX.	20 ±0.35 dB See Plot	
4	Coupling Sensitivity:	±0.7 dB MAX.	±0.29 dB (See Plot)	
5	Directivity:	12 dB MIN.	37.2 dB See Plot	
6	VSWR:	Primary 1.4:1 MAX. Secondary 1.4:1 MAX.	1.2:1 1.21:1 (See Plot)	
7	Power Handling:	Incident ≤ 50 W Reflected ≤ 2 W	Pass Typical Characteristics	
8	Impedance:	50 Ω	Pass	PMI QA2

QA/QC Approval: _____


PMI
QA2

Date: 10/12/2022



**SUMMARY TEST DATA
ON
PDC-418-20-50W-SFF**

PL38133/2241

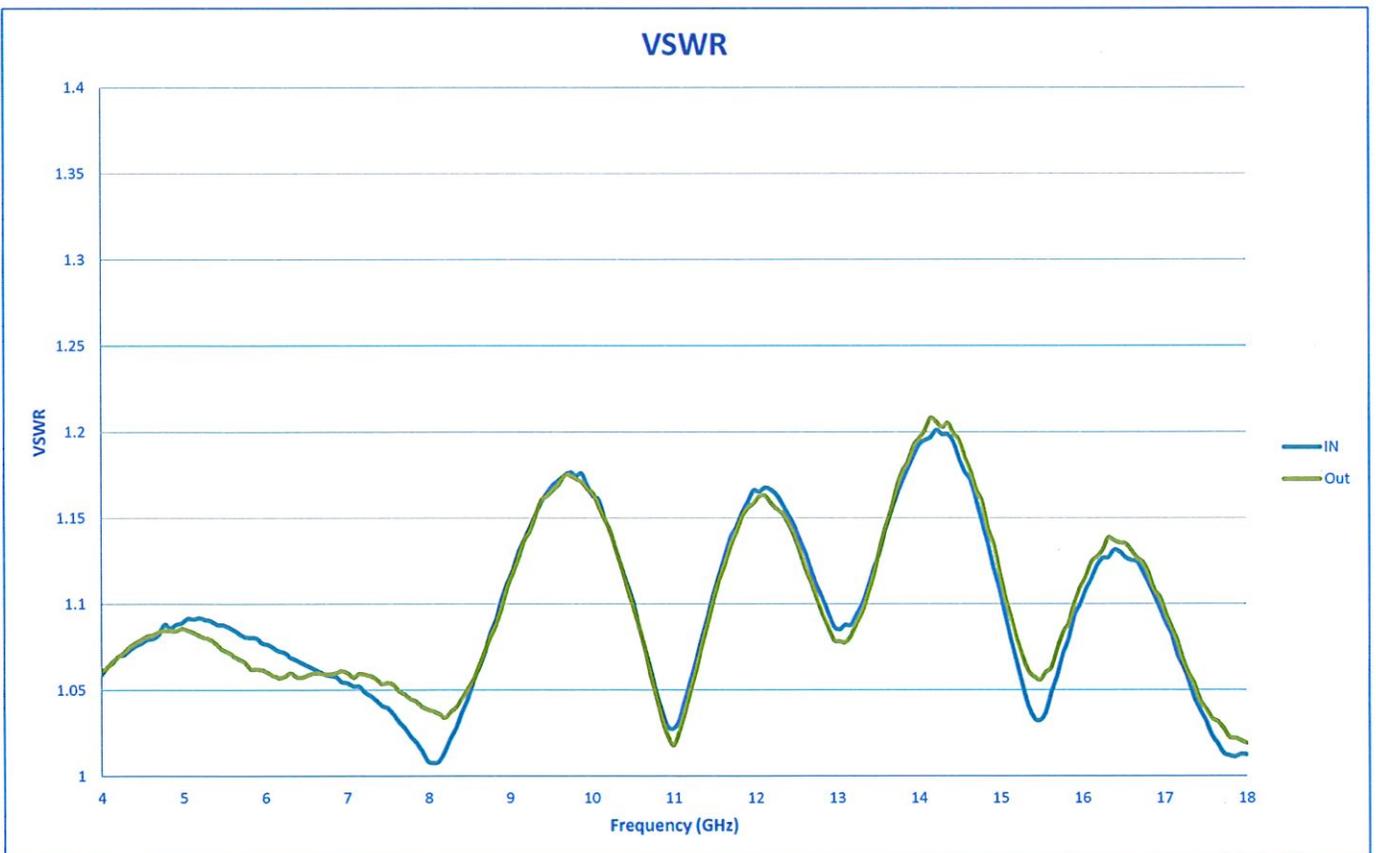



**SUMMARY TEST DATA
ON
PDC-418-20-50W-SFF**

PL38133/2241

