

**SUMMARY TEST DATA  
ON  
PEC3-40-30M26R5G-6R0-12-12-SFF Rev. B**

**CUSTOMER:** \_\_\_\_\_  
**SO:** \_\_\_\_\_  
**MODEL NO:** PEC3-40-30M26R5G-6R0-12-12-SFF Rev. B  
**SERIAL NO:** PL38163/2242

**TESTED BY:** Alfredo Lopez  
**TEMPERATURE:** +25°C  
**DATE:** 10/13/2022  
**DRAWING NO:** 27607250 **REV:** A1




TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	0.03 to 26.5 GHz	0.03 to 26.5 GHz	PMI QA2
2	Gain:	+35 dB Min	+36.72 dB See Graph	
3	Gain Flatness:	±3.5 dB Max	3.34 dB See Graph	
4	VSWR:	2.5:1 Max.	2.14 :1 See Graph	
5	Noise Figure:	6.0 dB Typ. 7.5 dB Max.	6.11 dB See Graph	
6	Pout @ 1dB Compression	+12 dBm Typ. +11 dBm Min.	+12.28 dBm See Graph	
7	DC Supply:	+12 to + 15 VDC @400mA Max.	+12 to + 15 VDC @210mA	

QA/QC Approval: 

PMI  
QA2

Date: 10/27/2022

## SUMMARY TEST DATA ON PEC3-40-30M26R5G-6R0-12-12-SFF Rev. B

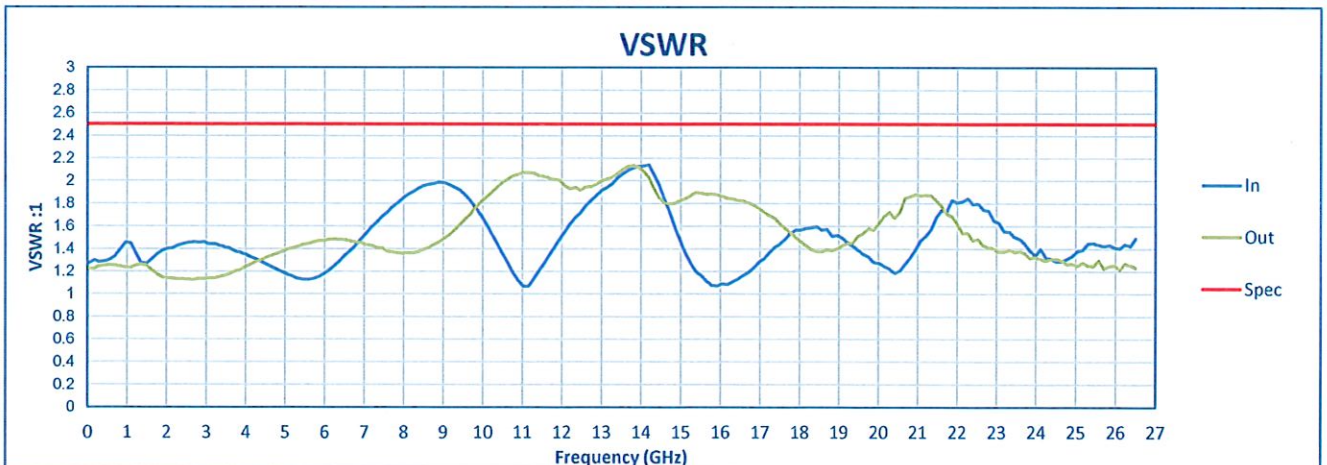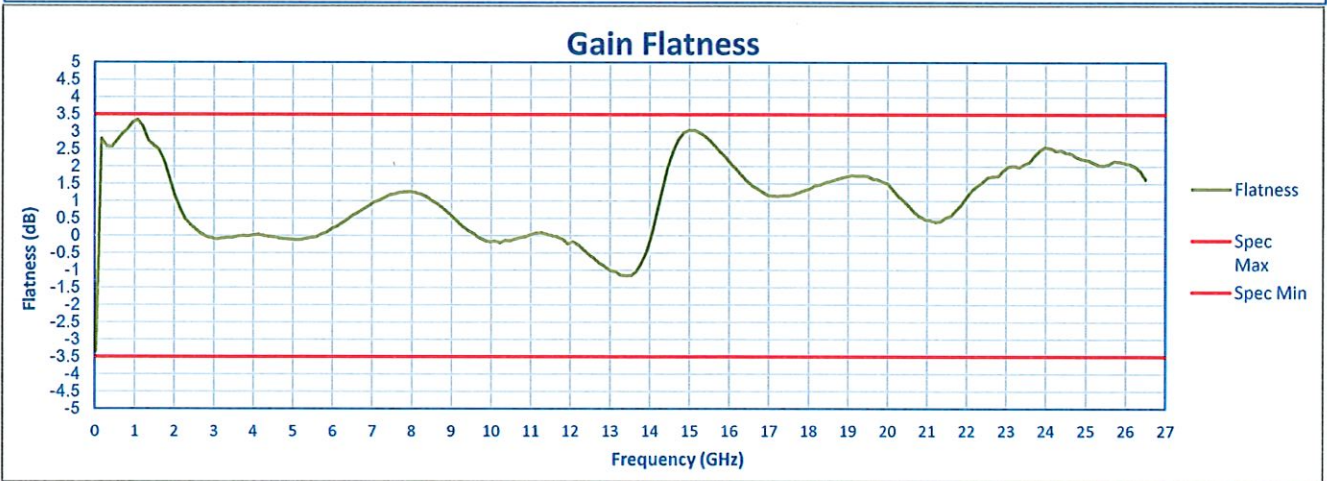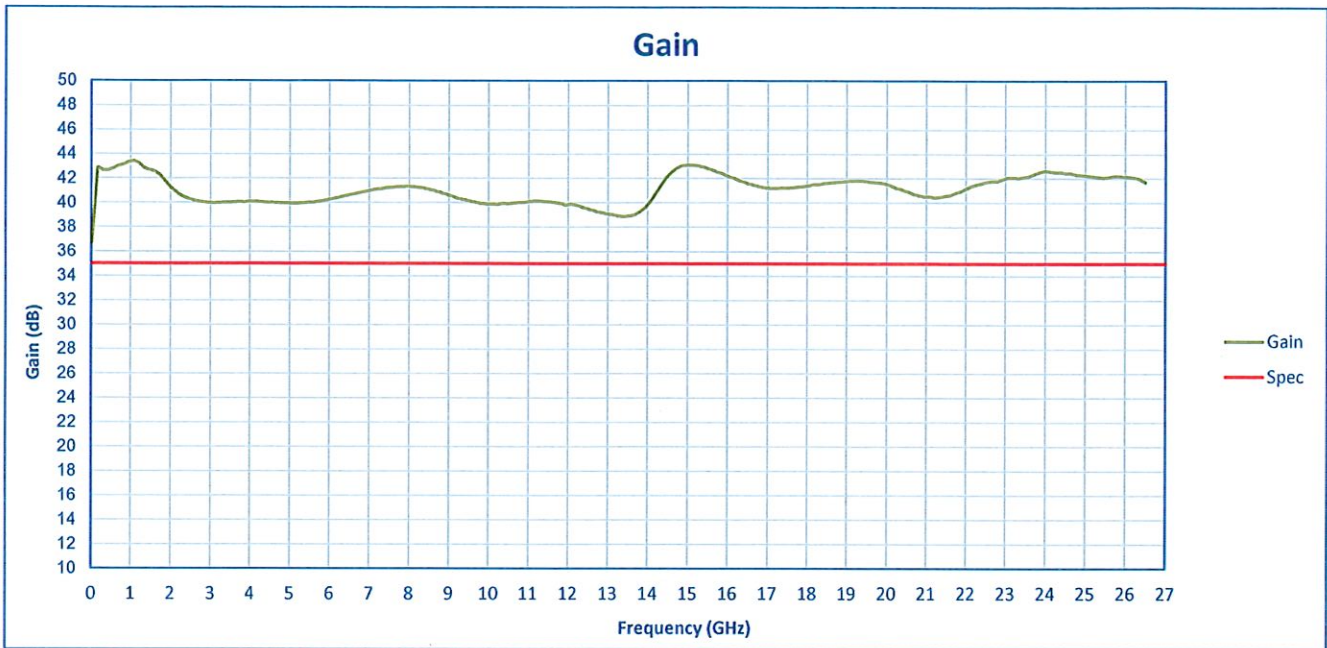



**SUMMARY TEST DATA  
ON  
PEC3-40-30M26R5G-6R0-12-12-SFF Rev. B**

