

**SUMMARY TEST DATA
ON
P2T-2G18G-60-T-SFF-PM-I-NG**




Customer: _____
SO No: _____
Model No: **P2T-2G18G-60-T-SFF-PM-I-NG**
Serial No: **PL38297/2244**

Tested By: **A. Lopez / H. Gonzales**
Temperature: **+25°C**
Date: **10/31/2022**
Drawing No: **27638420** Rev: **A1**

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 GHz to 18.0 GHz	2.0 GHz to 18.0 GHz	
2	Impedance:	50 Ω	50 Ω See Typical Characteristics	
3	Input Power:	+30 dBm Max. (Survival) +20 dBm Max. (Operating)	See Typical Characteristics	
4	VSWR:	2.0:1 Max.	In 1.69:1 Out 1.88 :1 See Plot	
5	Insertion Loss:	3.0 dB Max.	2.59 dB See Plot	
6	Phase Matching:	5° Max.	2.4° See Plot	
7	Isolation:	60 dB Min.	69 dB See Plot	
8	Switching Speed:	100 ns Max.	< 30 ns See Typical Characteristics	
9	DC Voltage:	+5 VDC @ 100 mA Max. -16.2 VDC @ 100 mA Max.	+5 VDC @ 85 mA -16.2 VDC @ 97 mA	

QA/QC Approval: _____

Date: _____

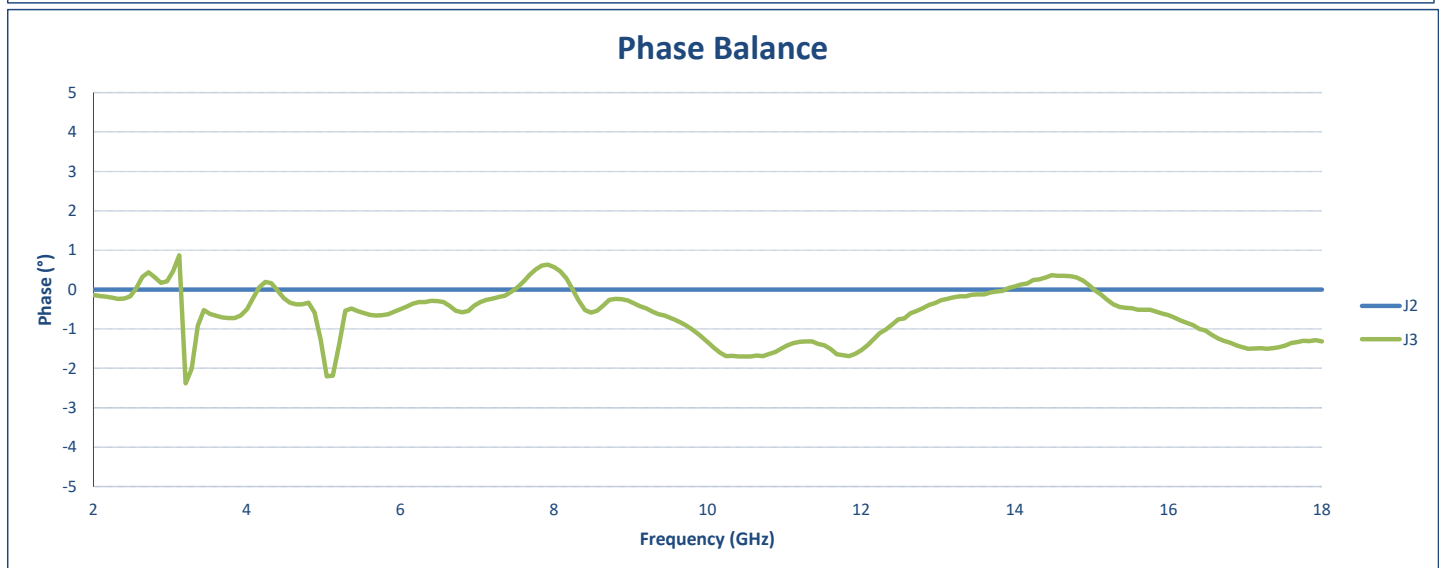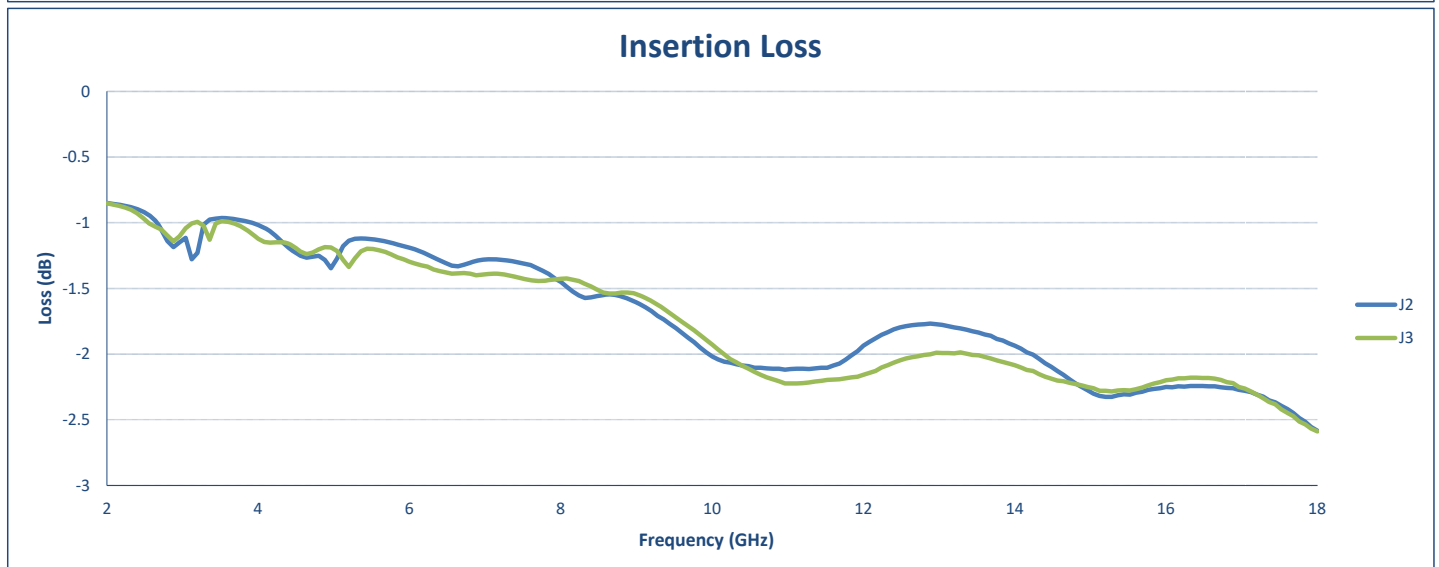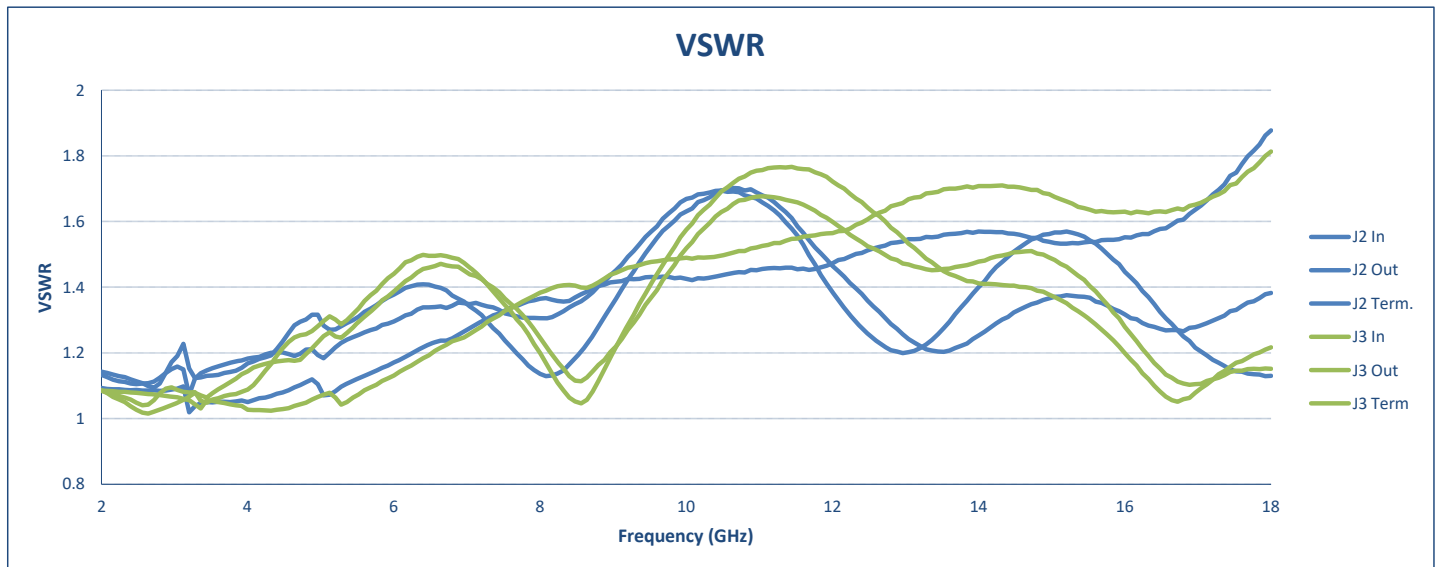

**SUMMARY TEST DATA
ON
P2T-2G18G-60-T-SFF-PM-I-NG**

