



SUMMARY TEST DATA
ON
P2T-500M18G-80-T-515-SFF-4W-ST

Customer: _____
 SO No: _____
 Model No: P2T-500M18G-80-T-515-SFF-4W-ST
 Serial No: PL39432/2305




Tested By: L. McGraw
 Temperature: 25° C
 Date: 1/31/2023
 Drawing No: 27630243 Rev: B2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	0.5 to 18.0 GHz	0.5 to 18.0 GHz	PMI QA2	
2	Insertion Loss:	3.5 dB Typ.	3.01 dB See Graph		
3	Isolation:	70 dB Min.	70.2 dB See Graph		
4	VSWR:	2.0:1 Max.	1.73:1 In 1.8:1 Out See Graph		
5	Operating Input Power:	4 Watts CW Max.	Pass See Typical Characteristics		
6	Switching Speed:	60 ns Max.	<40 ns See Typical Characteristics		
7	Power Supply:	+5 VDC @ 150 mA -15 VDC @ 150 mA	+5 VDC @ 62 mA -15 VDC @ 77 mA		
8	Control:	Logic Table			Pass
		CTL1	Function		
		1	J1-J2		
		0	J1-J3		

QA/QC Approval: PMI
QA2

Date: 1/31/2023

**SUMMARY TEST DATA
ON
P2T-500M18G-80-T-515-SFF-4W-ST**

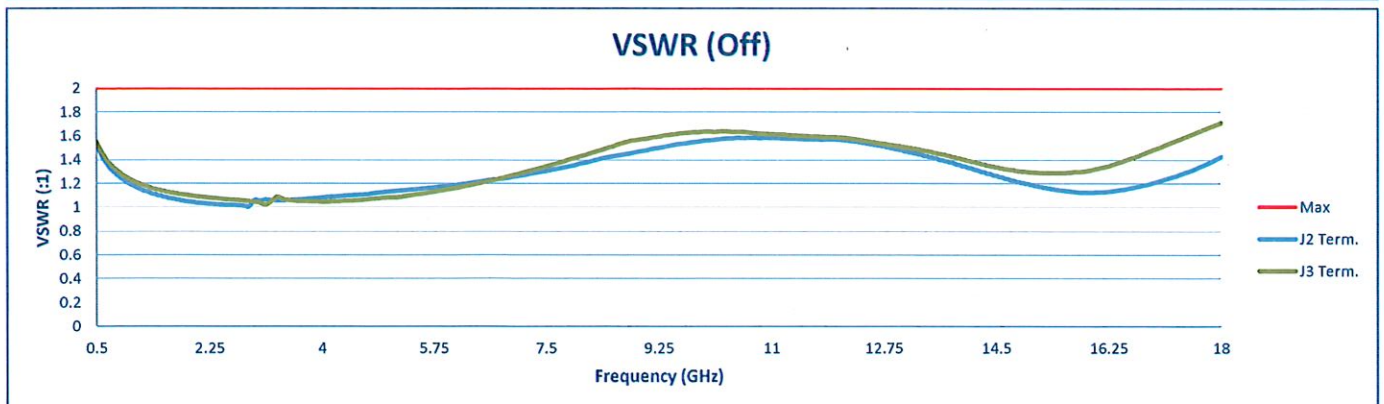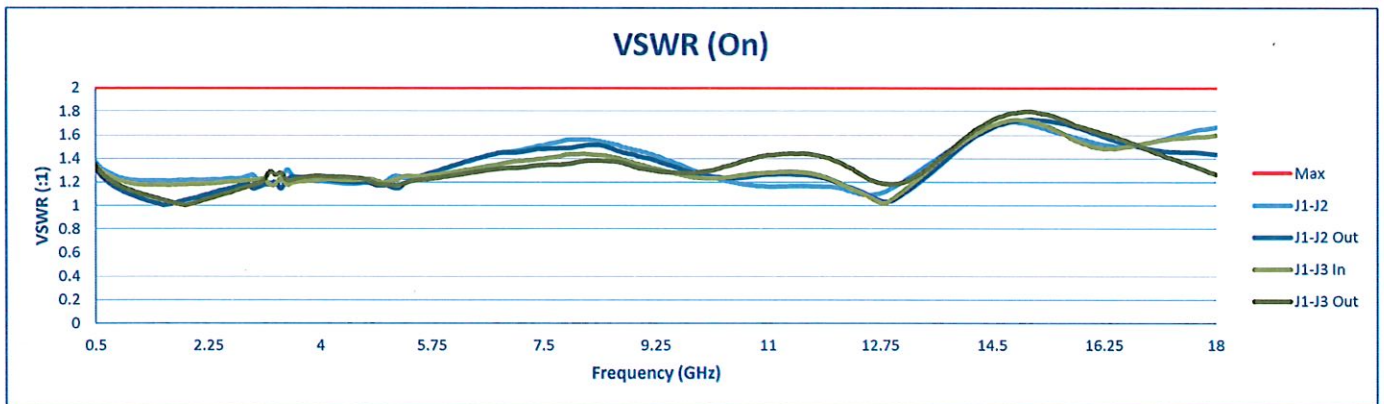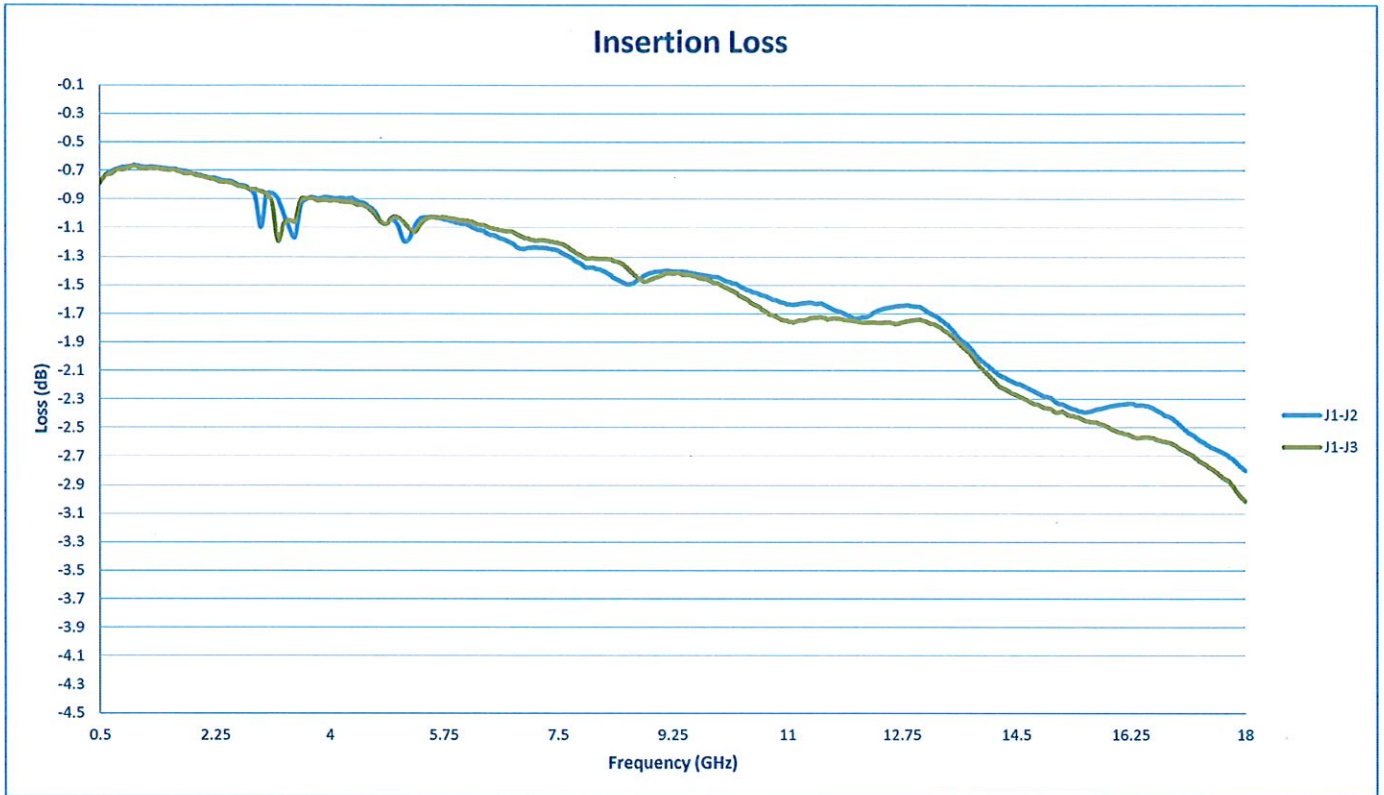

**SUMMARY TEST DATA
ON
P2T-500M18G-80-T-515-SFF-4W-ST**

