



**SUMMARY TEST DATA
ON
P1T-200M18G-80-T-SFF-RL**

Customer: _____
 SO No: _____
 Model No: P1T-200M18G-80-T-SFF-RL
 Serial No: PL39476/2306

Tested By: L. McGraw
 Temperature: 25 Degrees C
 Date: 2/6/2023
 Drawing No: 27629273 Rev: B1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.2 - 18 GHz	0.2 - 18 GHz	PMI QA2
2	Insertion Loss:	3.5 dB Max	2.4 dB (See Plot)	
3	Isolation:	70 dB Min (0.2 - 0.5 GHz) 80 dB Min (0.5 - 18 GHz)	81.2 dB (See Plot)	
4	VSWR: (J1 - "On Only") (J2 - "On or "Off")	2.0:1 Max	1.9 :1 (See Plot)	
5	Operating Power:	+27 dBm "Hot Switching" Max	Pass	
6	Switching Speed:	10 ns (Rise / Fall)	<5 ns	
		15 ns (Delay On)	<5 ns	
		30 ns (Delay Off)	<10 ns	
7	Control:	TTL Logic "0" = Off TTL Logic "1" = On	Pass	
8	DC Supply:	+5 VDC @ 50 mA Max	25 mA	PMI QA2
		-12 VDC @ 75 mA Max	37 mA	

QA/QC Approval: _____


PMI
QA2

Date: 2/9/2023



SUMMARY TEST DATA ON P1T-200M18G-80-T-SFF-RL

PL39476/2306

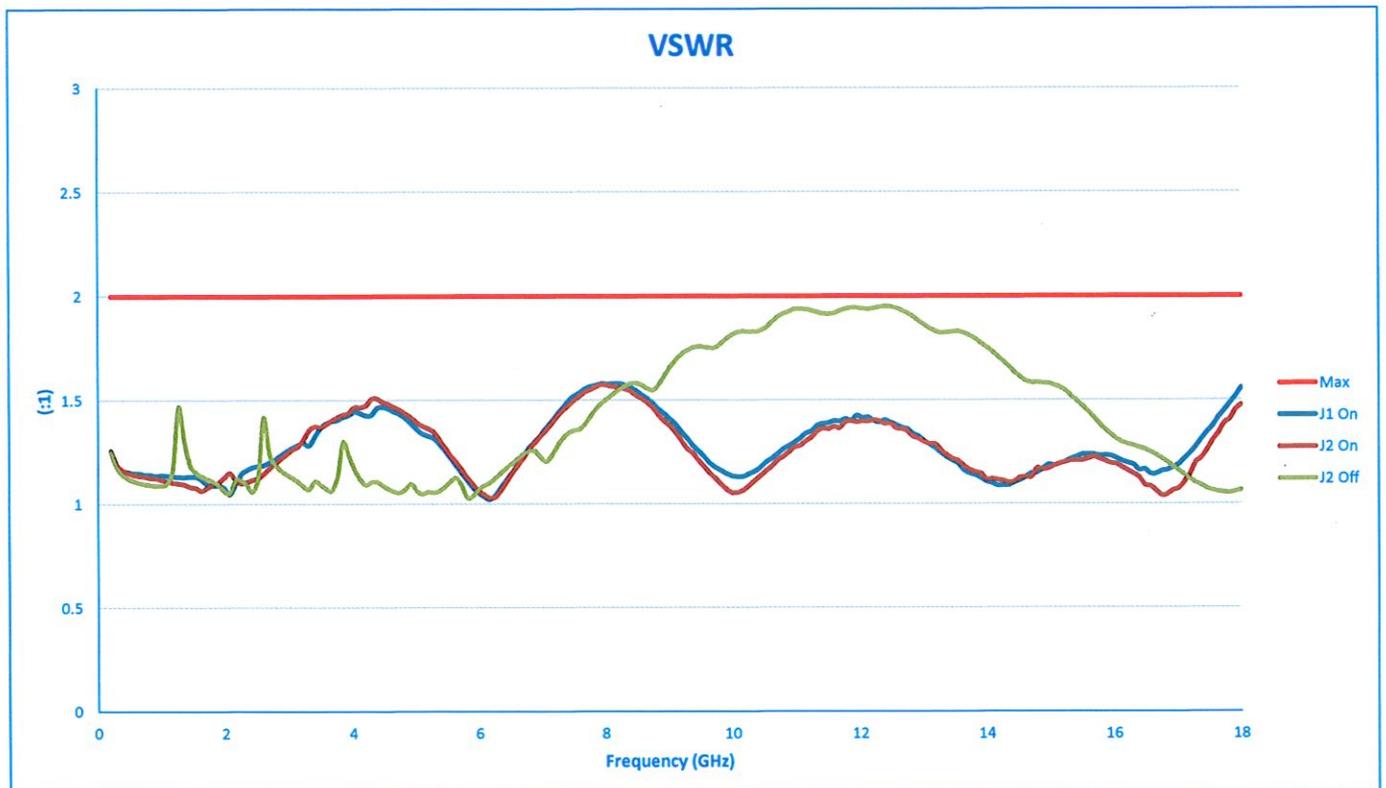



**SUMMARY TEST DATA
ON
P1T-200M18G-80-T-SFF-RL**

PL39476/2306

