



**SUMMARY TEST DATA
ON
P2T-500M40G-USB**

40206

Customer: _____ Tested By: S. PALACIO
SO No: _____ Temperature: +25°C
Model No: P2T-500M40G-USB Date: 10/22/2014
Serial No: 40206 Drawing No: 27616716 Rev: A1
Part No: _____

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 40 GHz	0.5 to 40 GHz See Plot	
2	Isolation:	60dB MIN	63.43dB See Plot	
3	Insertion Loss:	6.0 dB MAX	5.7dB See Plot	
4	VSWR In/Out:	2.5:1 TYP.	2.34:1 See Plot	
5	Input Power:	±20dBm CW MAX	Pass	
6	Power Connector:	USB Type A Plug	Pass	


QA/QC Approval: _____ Date: _____




SUMMARY TEST DATA ON P2T-500M40G-USB

40206

J1-J2 INSERTION LOSS & RETURN LOSS

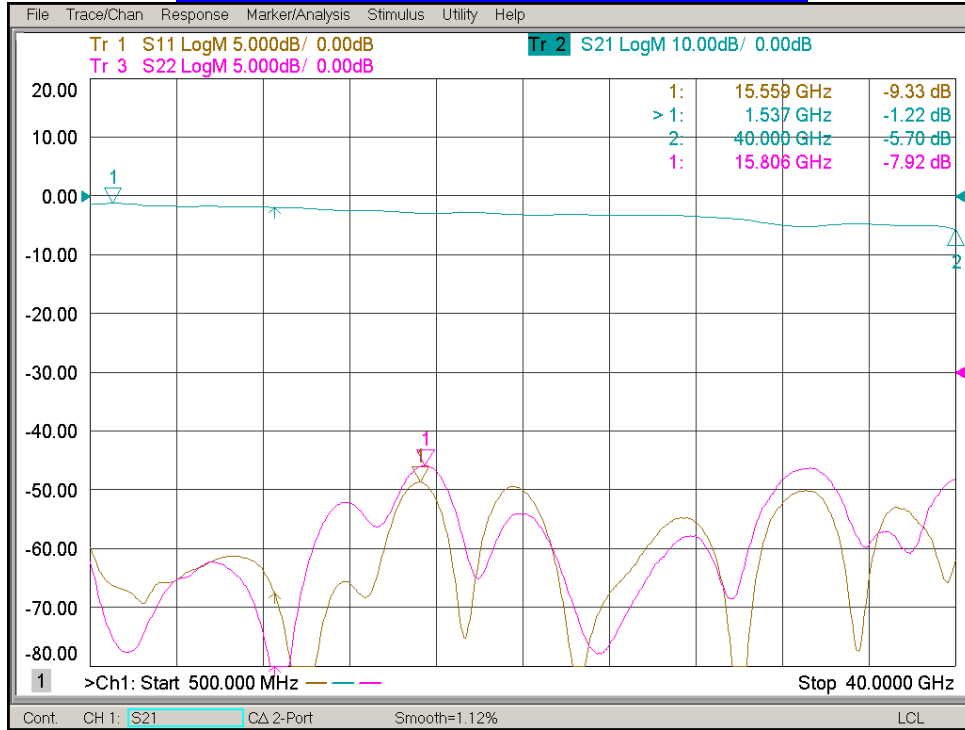

J1-J3 INSERTION LOSS & RETURN LOSS

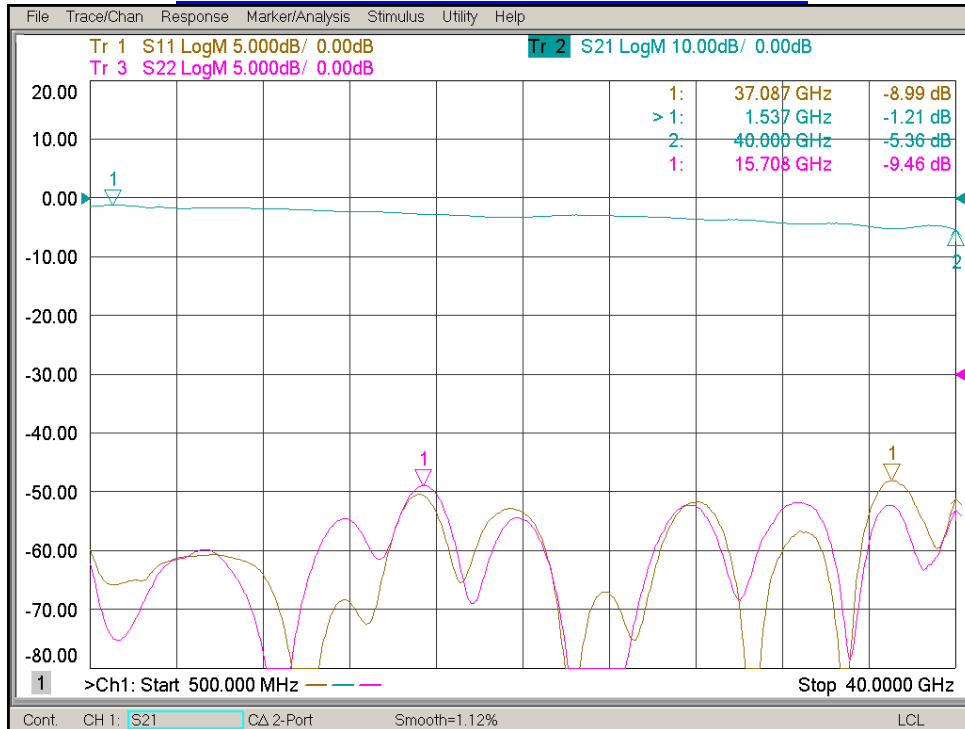





SUMMARY TEST DATA ON P2T-500M40G-USB

40206

J2 ISOLATION & OFF RETURN LOSS

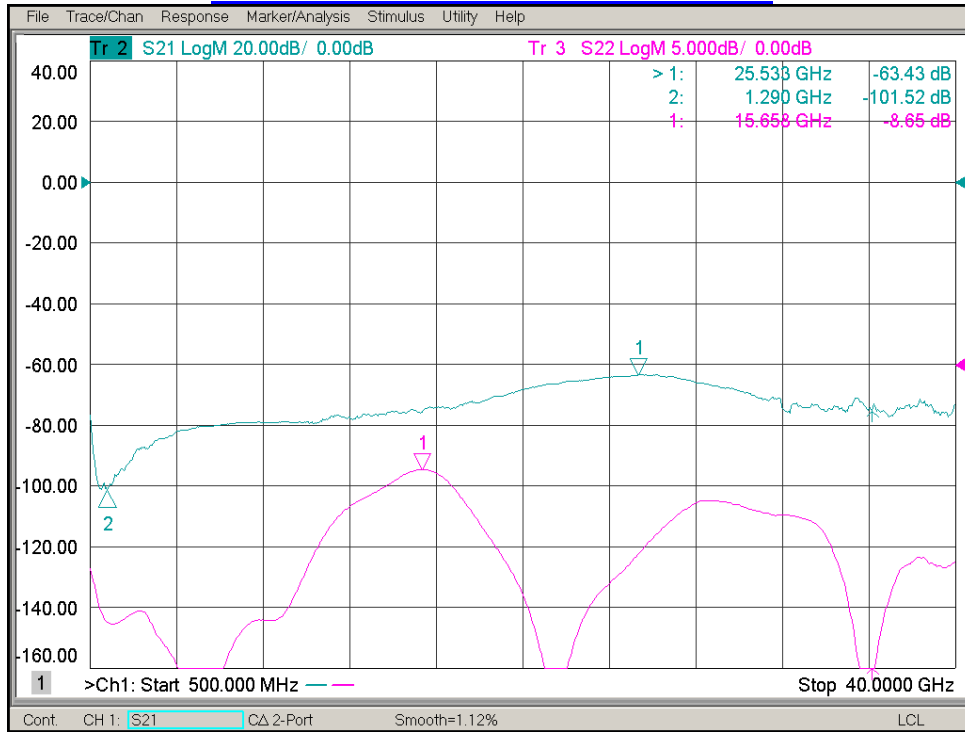

J2 ISOLATION & OFF RETURN LOSS

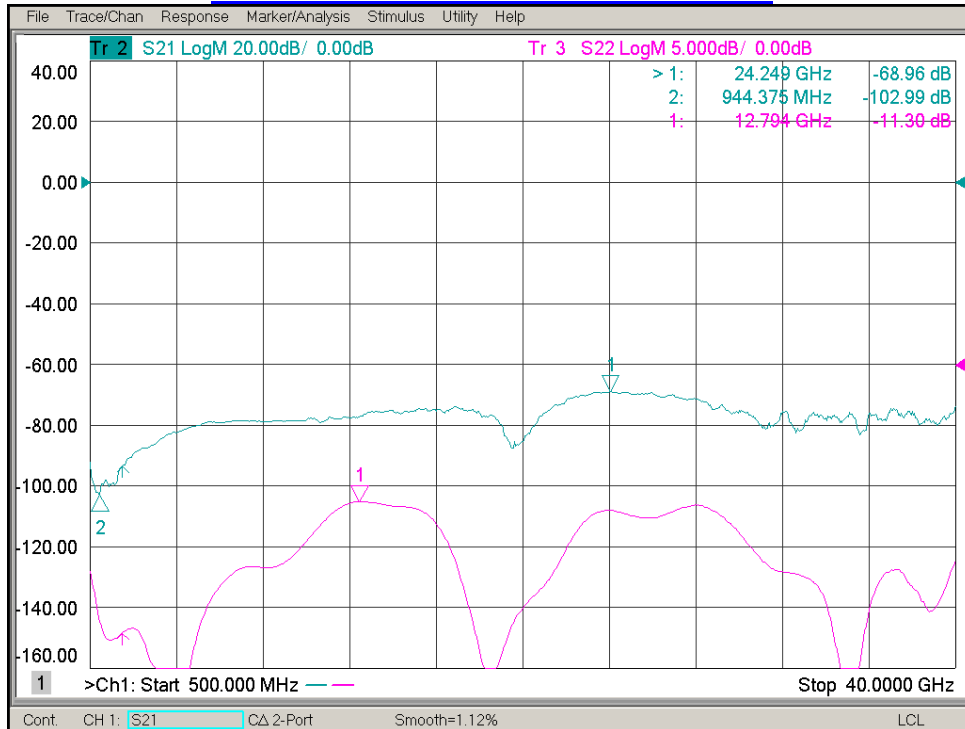

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com