



**SUMMARY TEST DATA  
ON  
P2T-500M40G-USB**

40207

Customer: \_\_\_\_\_ Tested By: S. PALACIO  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: P2T-500M40G-USB Date: 10/22/2014  
Serial No: 40207 Drawing No: 27616716 Rev: A1  
Part No: \_\_\_\_\_

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 40 GHz	0.5 to 40 GHz See Plot	
2	Isolation:	60dB MIN	62.7dB See Plot	
3	Insertion Loss:	6.0 dB MAX	5.98dB See Plot	
4	VSWR In/Out:	2.5:1 TYP.	2.38:1 See Plot	
5	Input Power:	±20dBm CW MAX	Pass	
6	Power Connector:	USB Type A Plug	Pass	


QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_




**SUMMARY TEST DATA  
ON  
P2T-500M40G-USB**

40207

**J1-J2 INSERTION LOSS & RETURN LOSS**

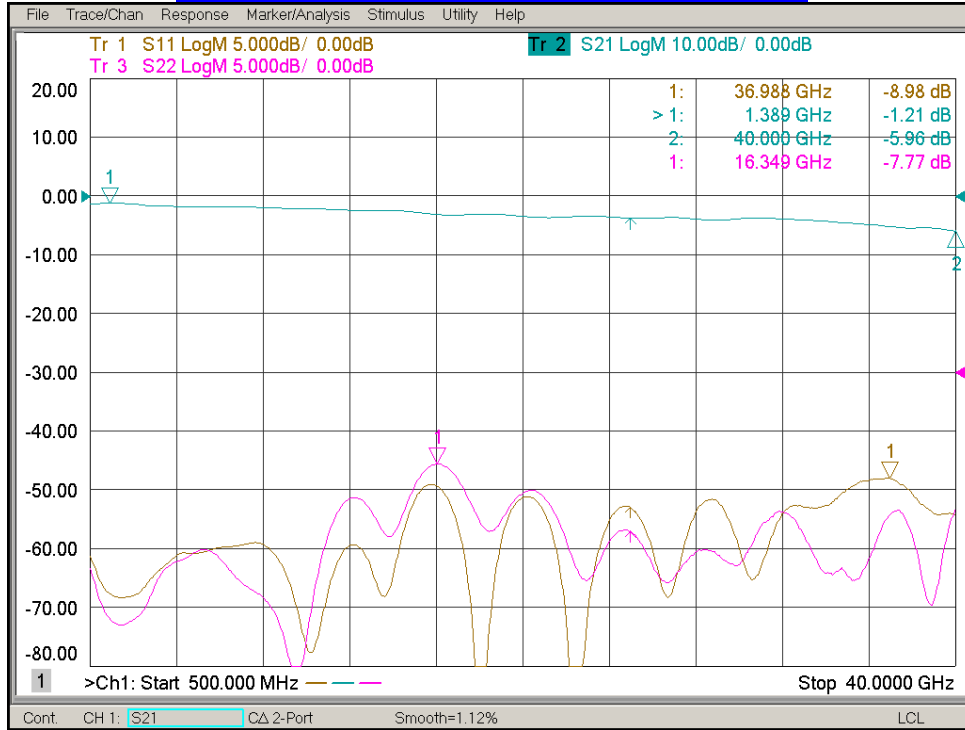

**J1-J3 INSERTION LOSS & RETURN LOSS**

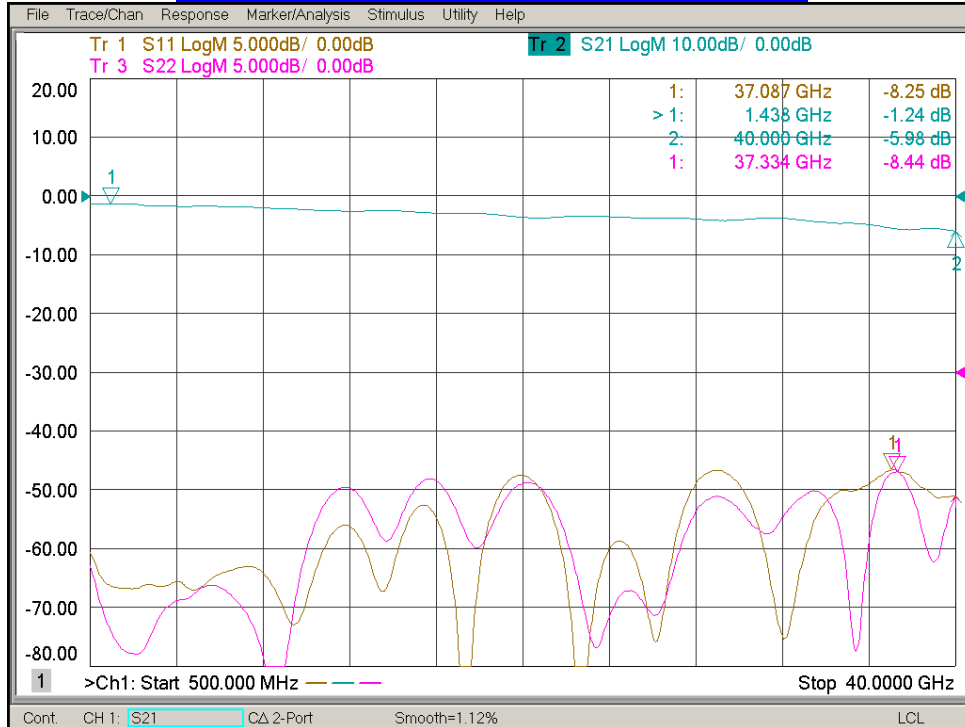




# SUMMARY TEST DATA ON P2T-500M40G-USB

40207

## J2 ISOLATION & OFF RETURN LOSS

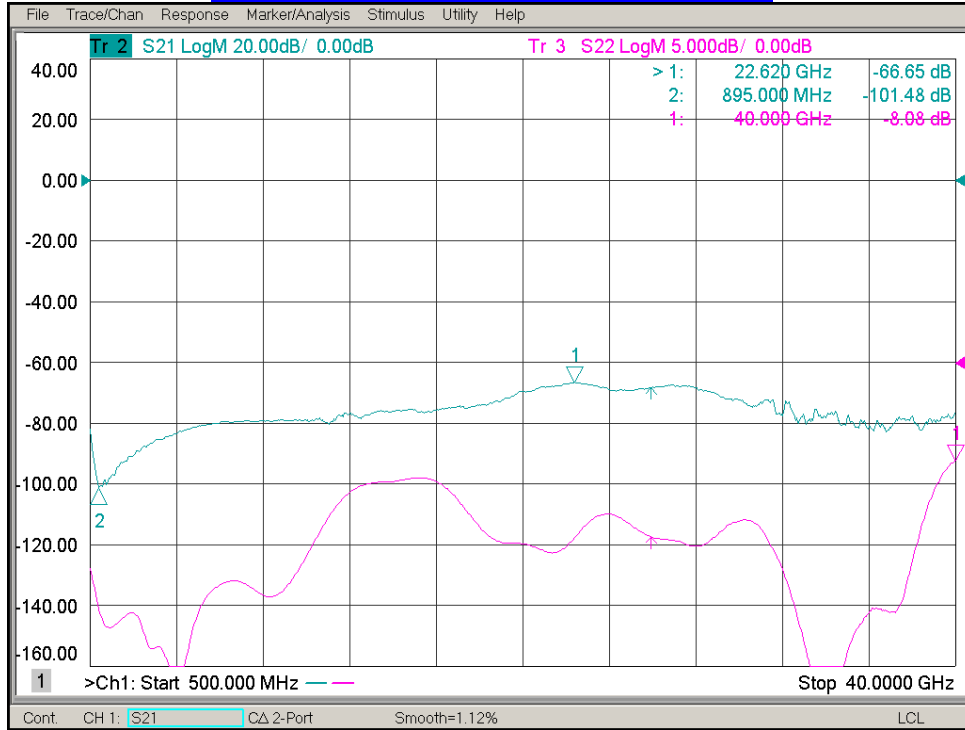

## J2 ISOLATION & OFF RETURN LOSS

