



**SUMMARY TEST DATA
ON
P2T-500M18G-USB**

140230

Customer: _____ Tested By: L. McGraw
SO No: _____ Temperature: +25°C
Model No: P2T-500M18G-USB Date: 11/03/14
Serial No: 40230 Drawing No: 27622531 Rev: A1
Part No: _____

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 18 GHz	0.5 to 18 GHz See Plot	
2	Isolation:	60dB MIN	68.87dB See Plot	
3	Insertion Loss:	6.0 dB MAX	2.78dB See Plot	
4	VSWR In/Out:	2.5:1 TYP.	2.05:1 See Plot	
5	Input Power:	+20dBm CW MAX	+20dBm CW MAX	
6	Power Connector:	USB Type A Plug	Pass	


QA/QC Approval: _____ Date: _____




**SUMMARY TEST DATA
ON
P2T-500M18G-USB**

140230

(J1-J2) Insertion Loss and Return Loss

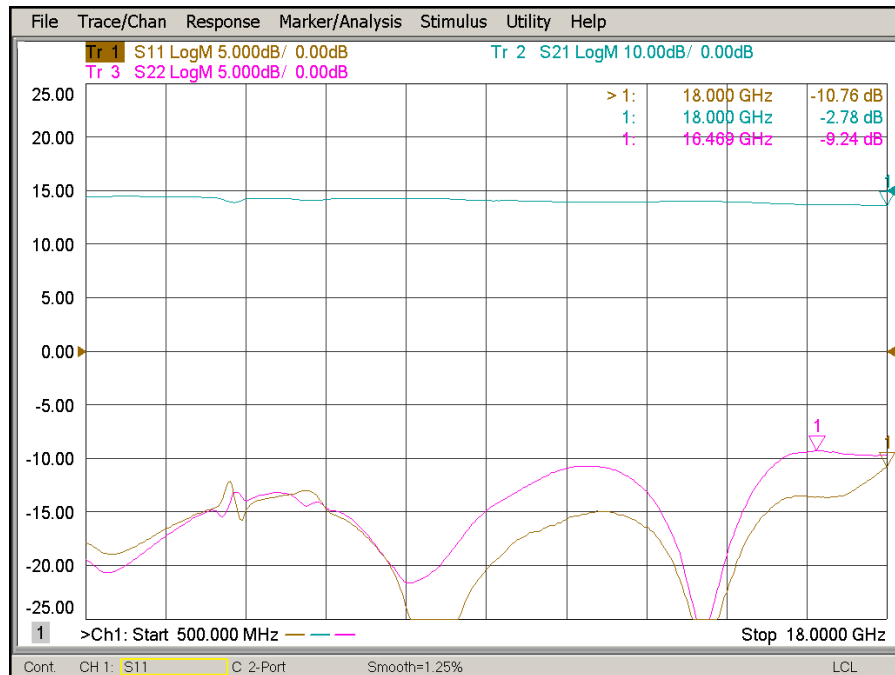

(J1-J2) Isolation and Termination Return Loss

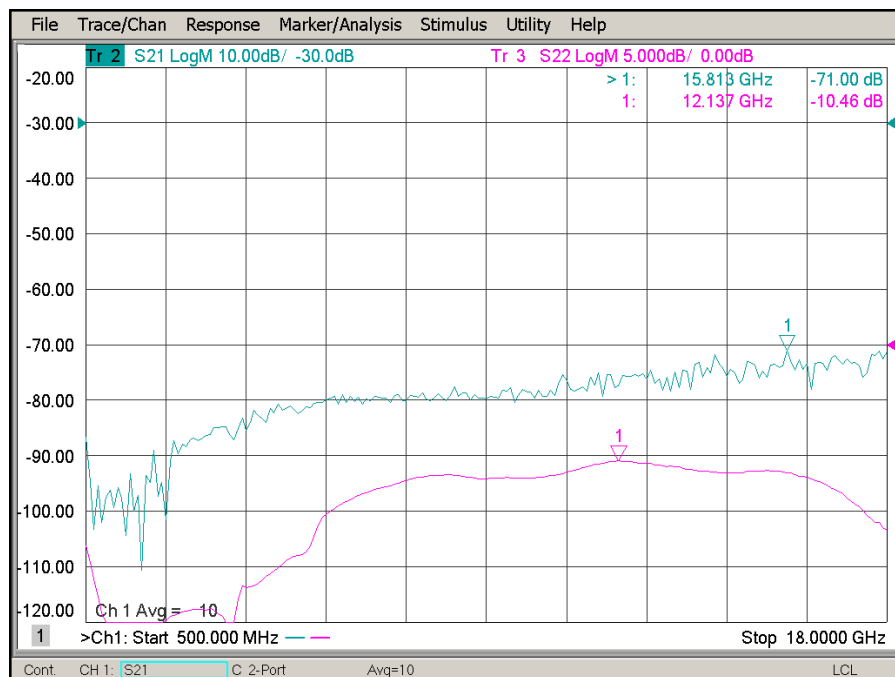





**SUMMARY TEST DATA
ON
P2T-500M18G-USB**

140230

(J1-J3) Insertion Loss and Return Loss

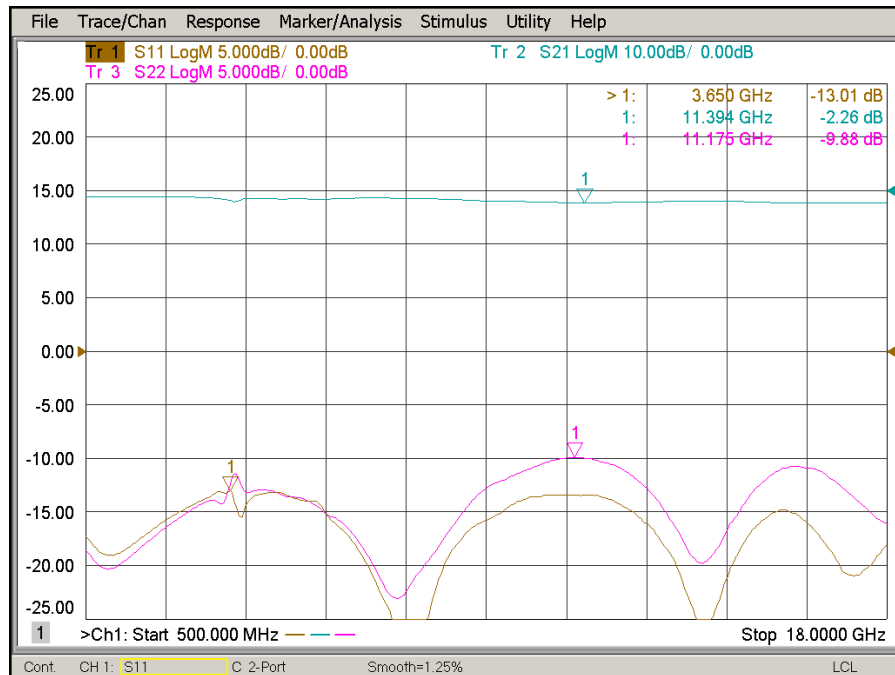

(J1-J3) Isolation and Termination Return Loss

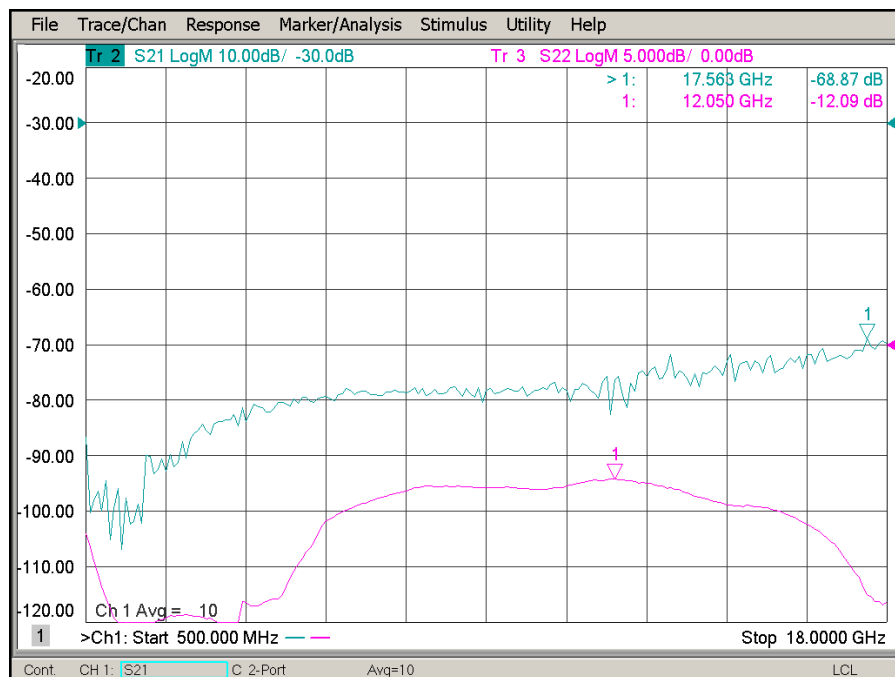



**SUMMARY TEST DATA
ON
P2T-500M18G-USB**

140230