



**SUMMARY TEST DATA
ON
P1T-DC18-60-T-SFF-HSLVT**

Customer: _____
 SO No: _____
 Model No: P1T-DC18-60-T-SFF-HSLVT
 Serial No: PL42590/2342




Tested By: K Craven
 Temperature: 25°C
 Date: 10/25/2023
 Drawing No: 27628081 Rev: A2


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	0.01 to 18 GHz	0.01 GHz to 18 GHz	PMI QA2	
2	Insertion Loss	4.5 dB Max.	3.57 dB		
3	Isolation	55 dB Min., 0.01-2 GHz 60 dB Min., 2-12 GHz 70 dB Min., 12-18 GHz	59.2 dB 61 dB 74.8 dB		
4	Leakage	60 dB Min., 0.01-12 GHz 70 dB Min., 12-18 GHz	0.01 GHz-12 GHz: 71.25 dB 12 GHz-18 GHz: 86.31 dB		
5	VSWR: In/Out	2:1 Max.	1.72:1 In 1.76:1 Out		
6	Control Signal	TTL LOGIC '0' : Insertion Loss '1' : Isolation	'0' : Insertion Loss '1' : Isolation		
7	Power Supply	-5 V @ 25 mA Max.	-5 V @ 20 mA		PMI QA2

QA/QC Approval:  PMI
QA2

Date: 10/25/2023

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@quanticpmi.com

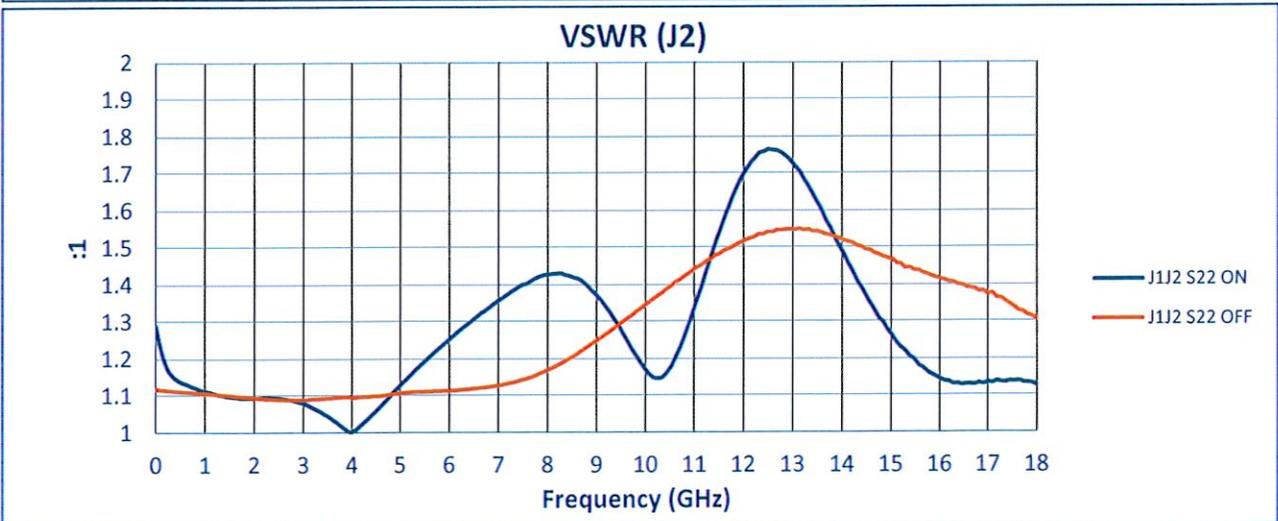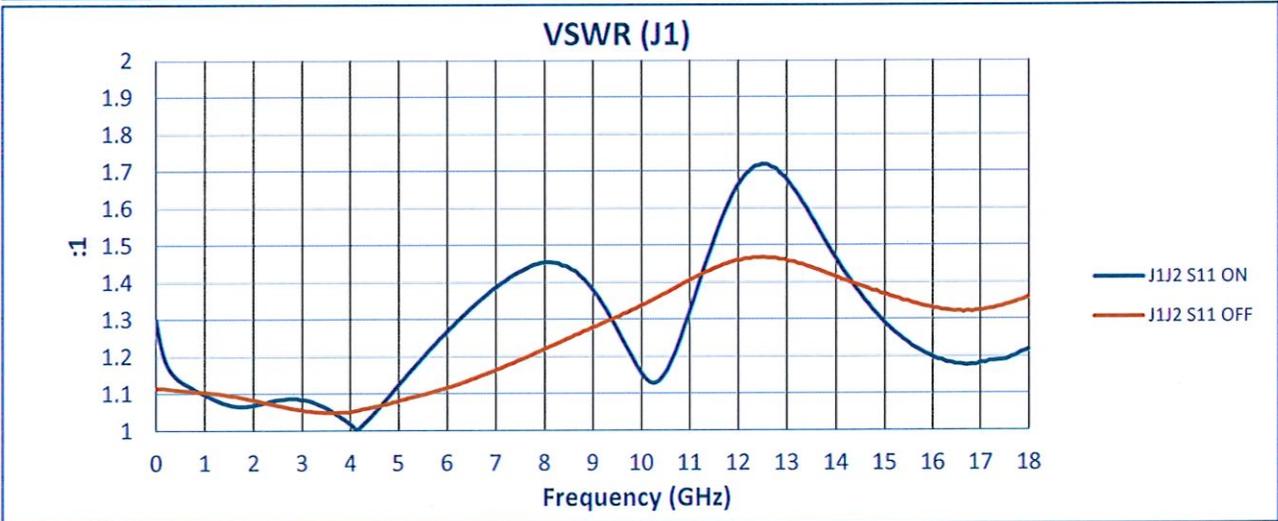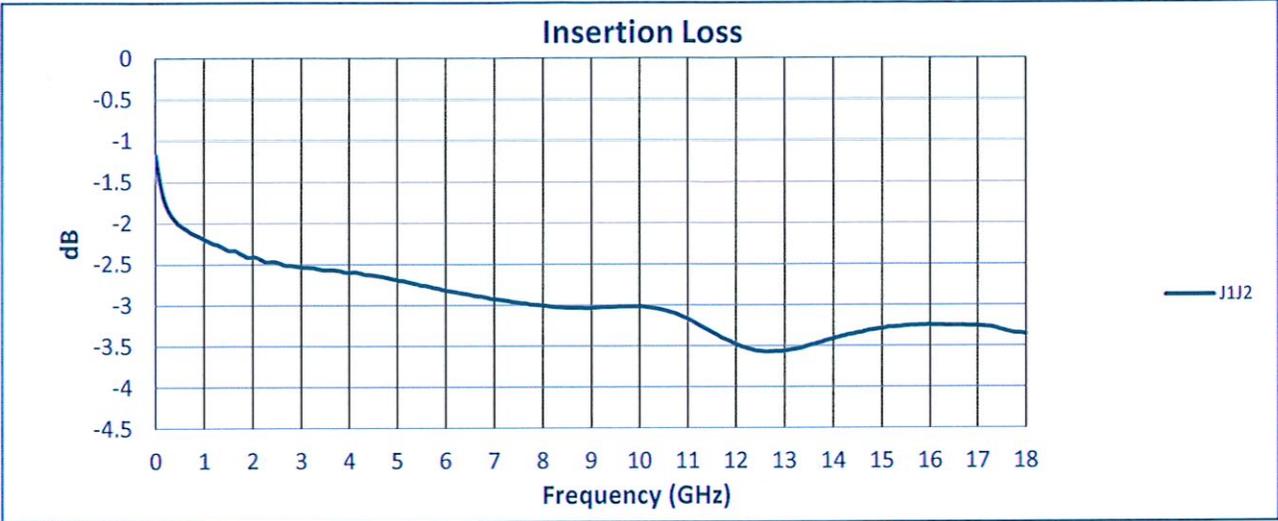

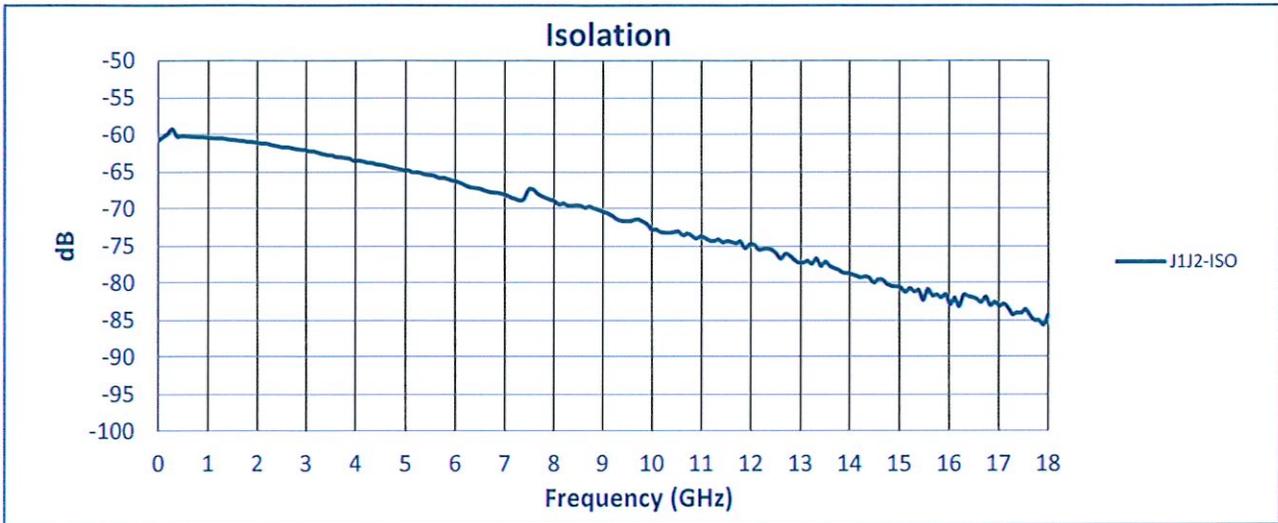

LEAKAGE

