



**SUMMARY TEST DATA  
ON  
P5T-218-60-R-25DBM-SFF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P5T-218-60-R-25DBM-SFF  
 Serial No: PL42707/2344




Tested By: S. O'Neill  
 Temperature: 25°C  
 Date: 10/30/2023  
 Drawing No: 27646700 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	2 GHz to 18 GHz	2 GHz to 18 GHz	PMI QA2
2	Insertion Loss	3.2 dB Max.	2.6 dB	
3	Isolation	60 dB Min.	84.2 dB	
4	VSWR: In/Out	2:1 Max.	1.76:1 In 1.61:1 Out	
5	Switching Speed	100 ns Max.	Pass See Typical Characteristics	
6	Operating Power CW	25 dBm Max	Pass See Typical Characteristics	
7	Power Supply	5 to 15 V @ 120 mA -15 to -5 V @ 65 mA	15 V @ 88 mA -15 V @ 9 mA	

QA/QC Approval:   PMI QA2

Date: 10/31/2023

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
 Email: sales@quanticpmi.com

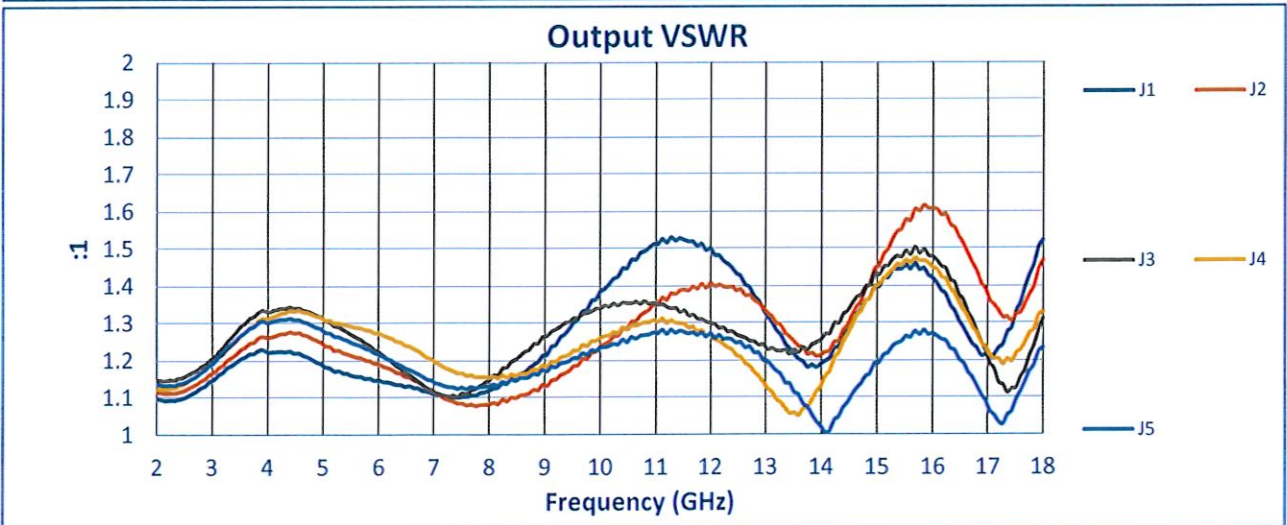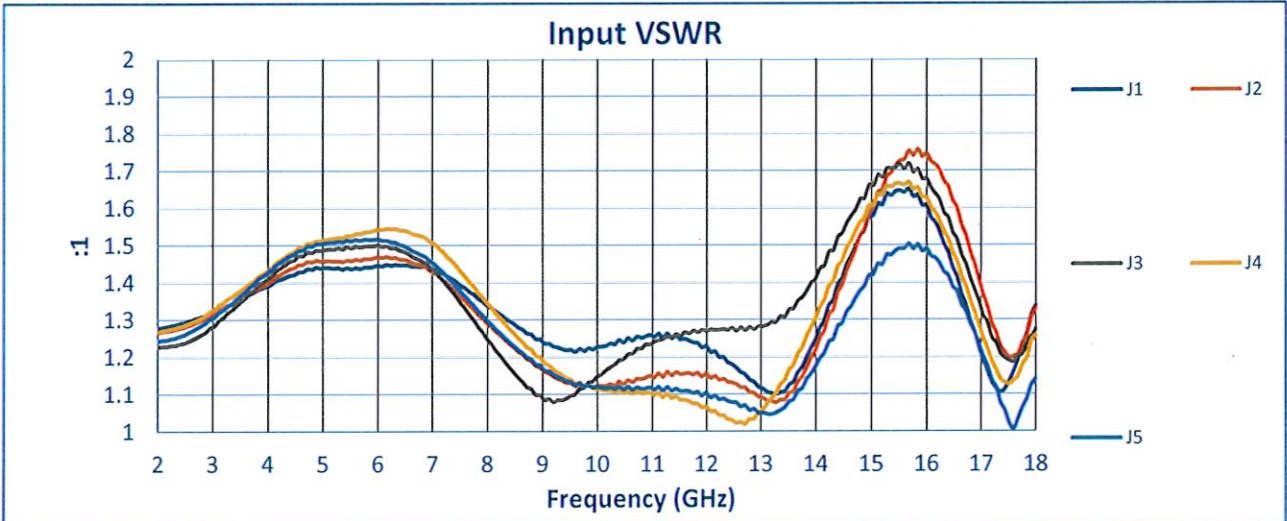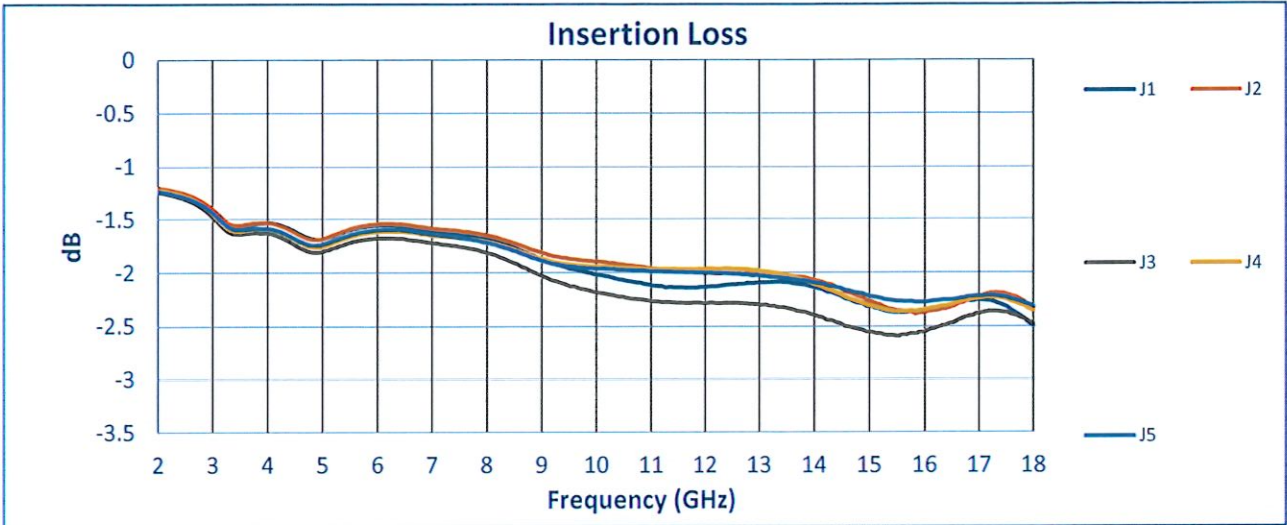

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@quanticpmi.com

