



**SUMMARY TEST DATA
ON
P5T-218-60-R-25DBM-SFF**

Customer: _____
 SO No: _____
 Model No: P5T-218-60-R-25DBM-SFF
 Serial No: PL42708/2344

Tested By: S. O'Neill
 Temperature: 25°C
 Date: 10/30/2023
 Drawing No: 27646700 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	2 GHz to 18 GHz	2 GHz to 18 GHz	PMI QA2	
2	Insertion Loss	3.2 dB Max.	2.48 dB		
3	Isolation	60 dB Min.	81.4 dB		
4	VSWR: In/Out	2:1 Max.	1.7:1 In 1.57:1 Out		
5	Switching Speed	100 ns Max.	Pass See Typical Characteristics		
6	Operating Power CW	25 dBm Max	Pass See Typical Characteristics		
7	Power Supply	5 to 15 V @ 120 mA -15 to -5 V @ 65 mA	15 V @ 88 mA -15 V @ 9 mA		PMI QA2




QA/QC Approval: _____

PMI
QA2


Date: _____

10/31/2023

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@quanticpmi.com

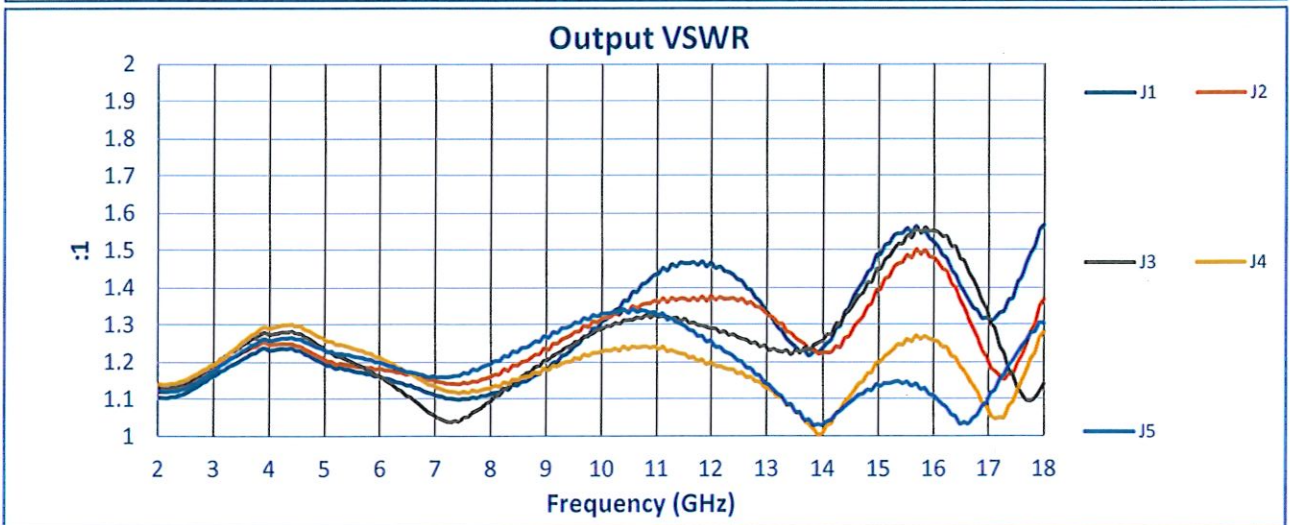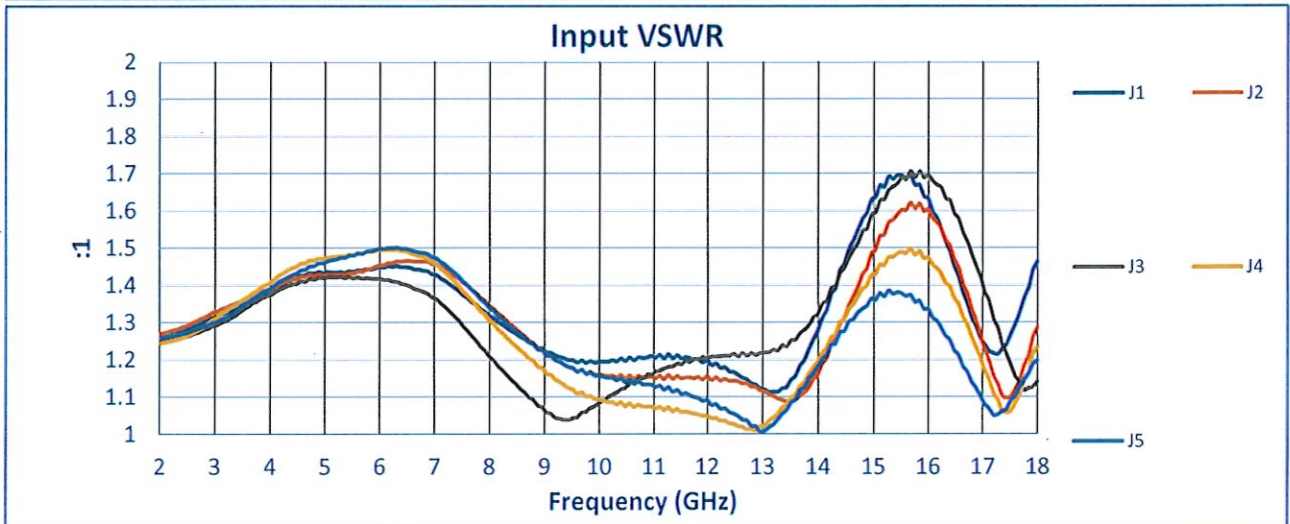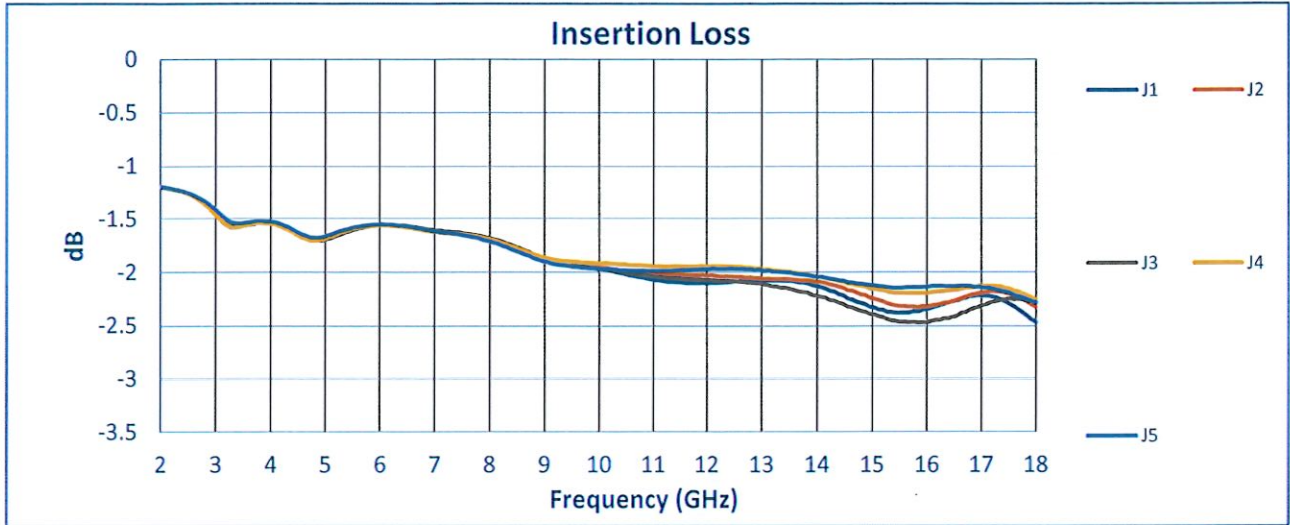

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com

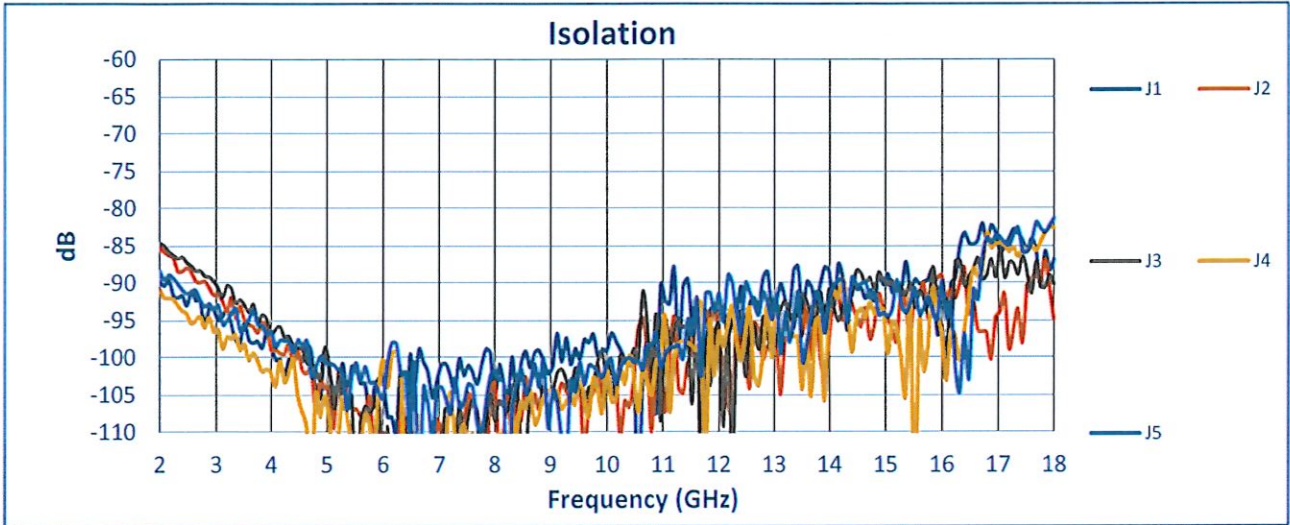

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com