

**SUMMARY TEST DATA
ON
PLDRO-18D6G-25M-EXT-ROHS**

Customer: _____

SO No: _____

Model No: PLDRO-18D6G-25M-EXT-ROHS

Serial No: PL43120/2348

Tested By: K Craven

Temperature: 25°C

Date: 7/11/2024

Drawing No: 27647260

Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Output Frequency	18.6 GHz	18.6 GHz	PMI QA2
2	Reference Frequency	25 MHz	25 MHz	
3	Input Power Level	+10 ±3 dBm	+10 ±3 dBm	
4	No Lock Break VSWR	3:1 Max	Pass	
5	Output Power Level	+13 to +15 dBm Min	14.5 dBm	
6	Output Spurious (10 MHz to 2 GHz)	-76 dBc Max	-83.9 dBc	
7	Output Harmonics	-20 dBc Min	-79.58 dBc	
8	Output SSB Phase Noise	-40 dBc/Hz @ 10 Hz Max -65 dBc/Hz @ 100 Hz Max -95 dBc/Hz @ 1 kHz Max -105 dBc/Hz @ 10 kHz Max -110 dBc/Hz @ 100 kHz Max -125 dBc/Hz @ 1 MHz Max -135 dBc/Hz @ ≥10 MHz Max	-58.2 dBc/Hz @ 10 Hz -92.93 dBc/Hz @ 100 Hz -112.98 dBc/Hz @ 1 kHz -118.84 dBc/Hz @ 10 kHz -119.85 dBc/Hz @ 100 kHz -144.75 dBc/Hz @ 1 MHz -158.28 dBc/Hz @ 10 MHz	
9	Reference Input Spurious	-80 dBc Max	-80 dBc Max	
10	External Reference Phase Noise	-110 dBc/Hz @ 10 Hz Max -137 dBc/Hz @ 100 Hz Max -156 dBc/Hz @ 1 kHz Max -165 dBc/Hz @ 10 kHz Max -168 dBc/Hz @ 100 kHz Max	-110 dBc/Hz @ 10 Hz Max -137 dBc/Hz @ 100 Hz Max -156 dBc/Hz @ 1 kHz Max -165 dBc/Hz @ 10 kHz Max -168 dBc/Hz @ 100 kHz Max	PMI QA2

*Spurious maximum measured value includes both wideband sweep spurs and sidebands close to carrier.



**SUMMARY TEST DATA
ON
PLDRO-18D6G-25M-EXT-ROHS**

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
11	Lock Detector	TTL High - In Lock; TTL Low - Out of Lock	TTL High - In Lock; TTL Low - Out of Lock	PMI QA2
12	Supply Voltage	+12±0.5V @ 500mA Max (@ 25°C)	+12 ± 0.5V @ 410 mA	
13	Phase Voltage Monitor Output	0V to +12V	0V to +12V	
14	Cold Start Temperature:	-45°C Max	-45°C Max	PMI QA2

QA/QC Approval:  PMI
QA2


Date: 7/19/2024

SUMMARY TEST DATA
ON
PLDRO-18D6G-25M-EXT-ROHS

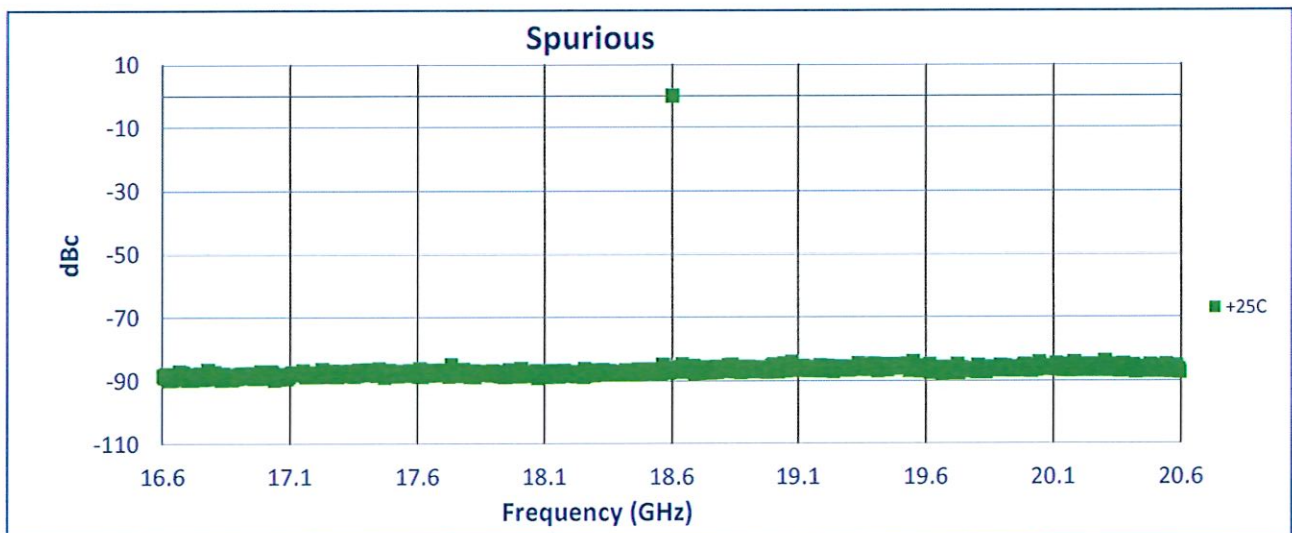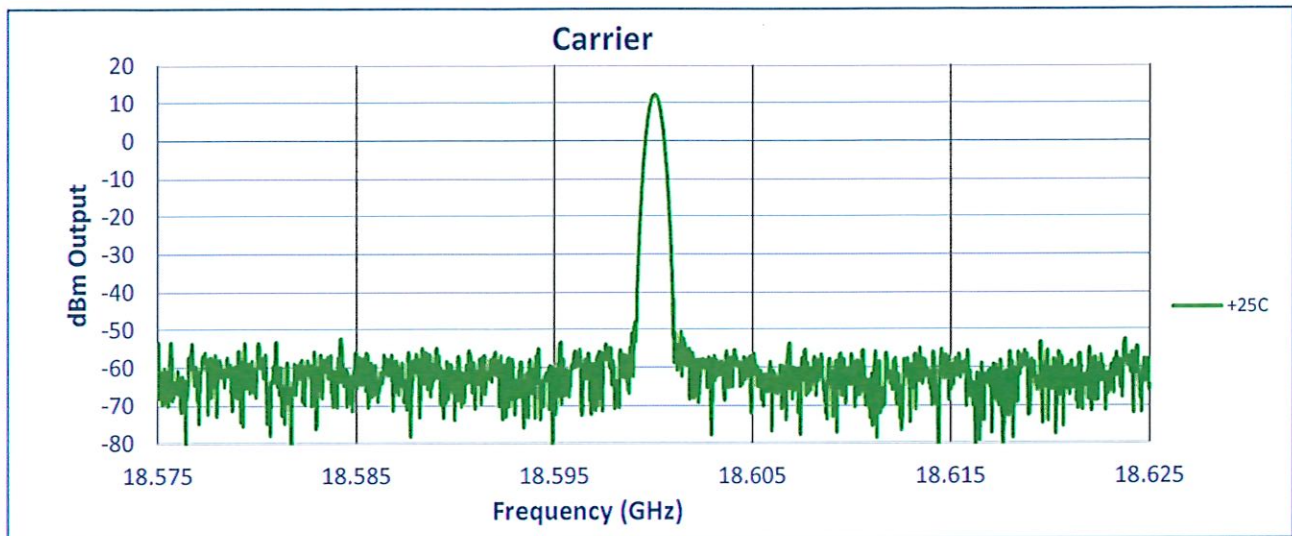

SUMMARY TEST DATA ON PLDRO-18D6G-25M-EXT-ROHS

Phase Noise

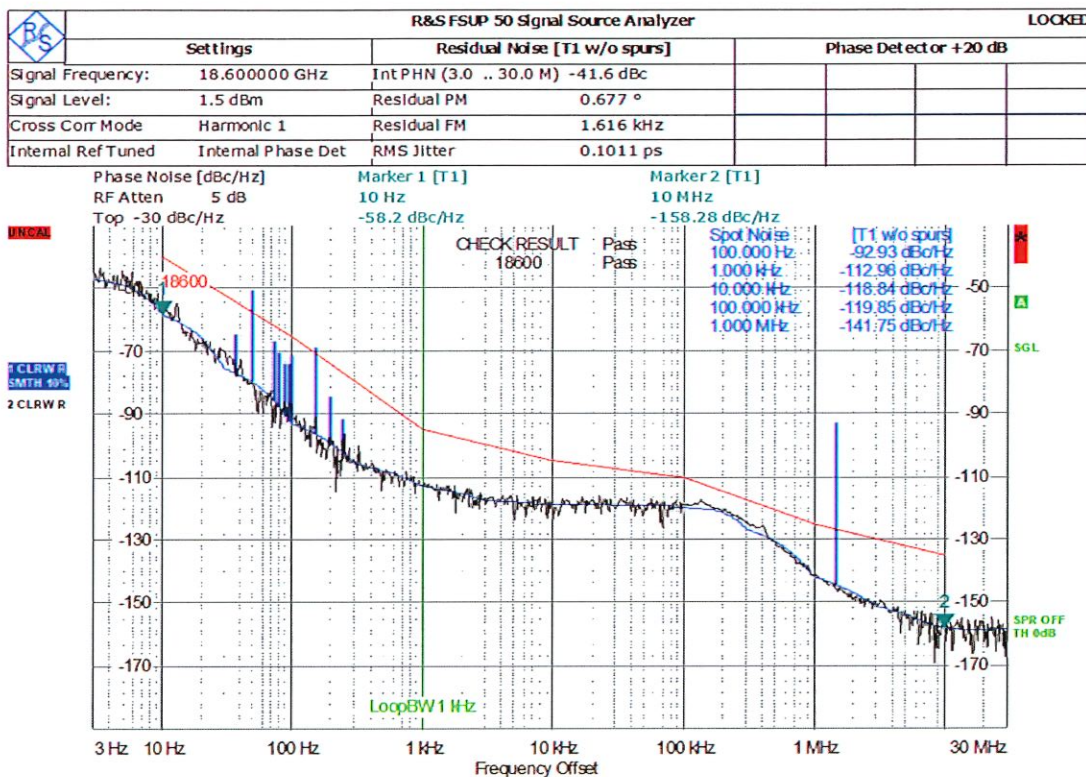

Harmonics

-79.58 dBc

