



**SUMMARY TEST DATA**  
ON  
**PEC-20M3G-3T-SFF-LV-ROHS**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: **PEC-20M3G-3T-SFF-LV-ROHS**  
 Serial No: **PL44996/2411**

Tested By: **S. O'Neill**  
 Temperature: **25 °C**  
 Date: **3/11/2023**  
 Drawing No: **27643560** Rev: **A1**

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	20 MHz to 3.0 GHz	20 MHz to 3.0 GHz	PMI QA2
2	Insertion Loss:	0.02 - 1.0 GHz 2.0 dB Max. 1.0 - 2.0 GHz 2.5 dB Max. 2.0 - 3.0 GHz 4.0 dB Max.	1.91 dB 1.84 dB 3.31 dB	
3	Isolation:	0.02-1.0 GHz 70dB Min. 1.0 - 2.0 GHz 60dB Min. 2.0 - 3.0 GHz 50 dB Min.	88.75 dB 83.37 dB 71.96 dB	
4	VSWR: (0.02-3.0 GHz)	2.0:1 Max.	1.93:1 See Plot	
6	Video Transients	ABOVE 20 MHz -100 dBm BELOW 20 MHz -75 dBm	PASS See Typical Characteristics	
7	Control	TTL1 "0", TTL2 "0" J1-J4 TTL1 "0", TTL2 "1" J2-J4 TTL1 "1", TTL2 "0" J3-J4 TTL1 "1", TTL2 "1" UNDEFINED	PASS	PMI QA2
8	Power Supply:	+5V @ 250 mA Max. -12V @ 120 mA Max.	+5V @ 140 mA -12V @ 110 mA	


QA/QC Approval:  PMI  
QA2

Date: 3/11/2024



SUMMARY TEST DATA  
ON  
PEC-20M3G-3T-SFF-LV-ROHS

PL44996/2411

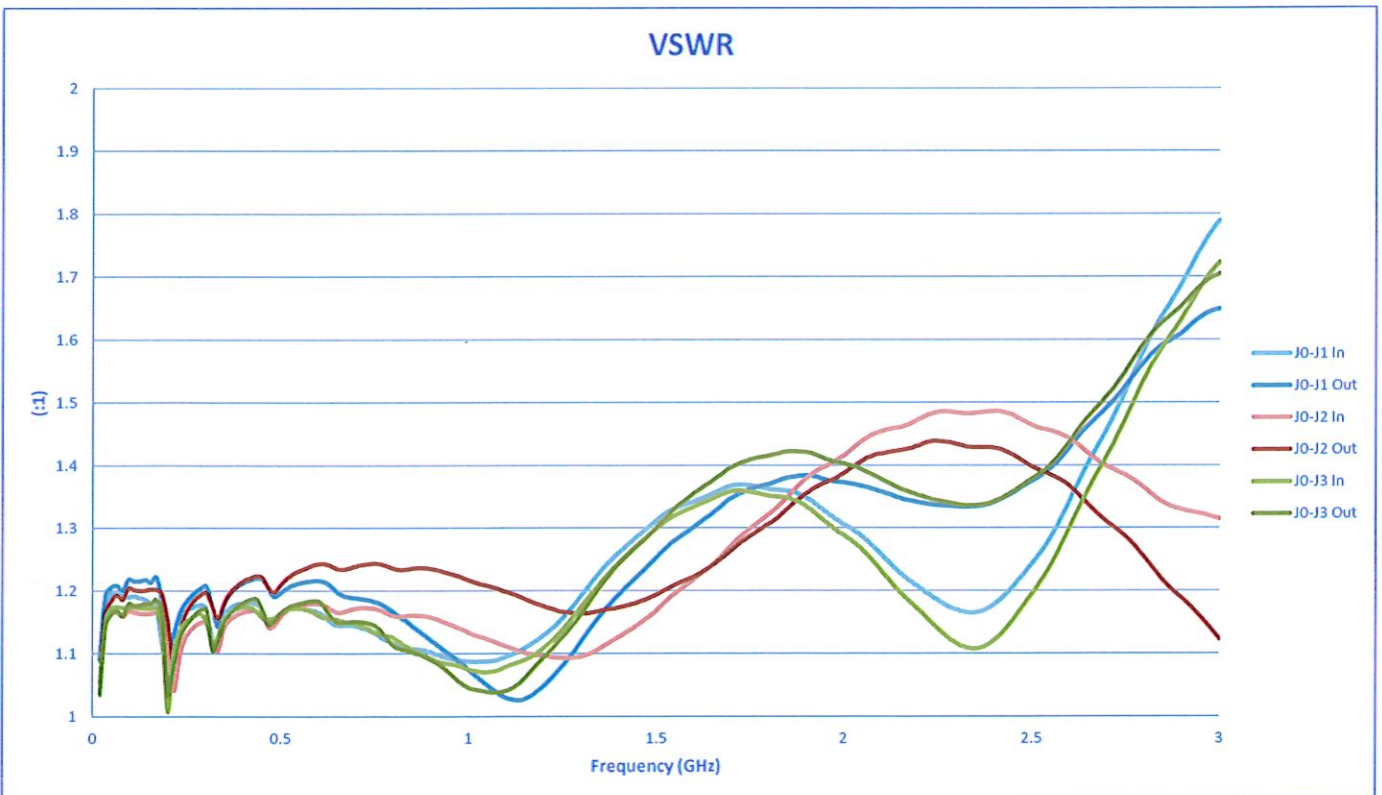



SUMMARY TEST DATA  
ON  
PEC-20M3G-3T-SFF-LV-ROHS

PL44996/2411

