



**SUMMARY TEST DATA
ON
P2T-3040-60-R-292FF-RC**

Customer: _____
 SO No: _____
 Model No: P2T-3040-60-R-292FF-RC
 Serial No: PL45361/2413




Tested By: S. O'Neill
 Temperature: 25°C
 Date: 3/28/2024
 Drawing No: 27647600 Rev: B1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	30 GHz to 40 GHz	30 GHz to 40 GHz	PMI QA2	
2	Isolation	60 dB Min.	71.3 dB		
3	Insertion Loss	3.5 dB Max. @ 25°C 4.0 dB Max Over Temp.	3.5 dB		
4	VSWR: In/Out	2.5:1 Max. 2:1 Typ.	1.53:1 In 1.43:1 Out		
5	Power Supply	5 V @ 75 mA Typ -5 V @ 50 mA Typ	5 V @ 65 mA -5 V @ 45 mA		
6	Control Signal	TTL LOGIC '0': J1-J2 Low Loss '1': J1-J3 Low Loss	Pass		PMI QA2

QA/QC Approval:  PMI QA2

Date: 3/28/2024

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@quanticpmi.com

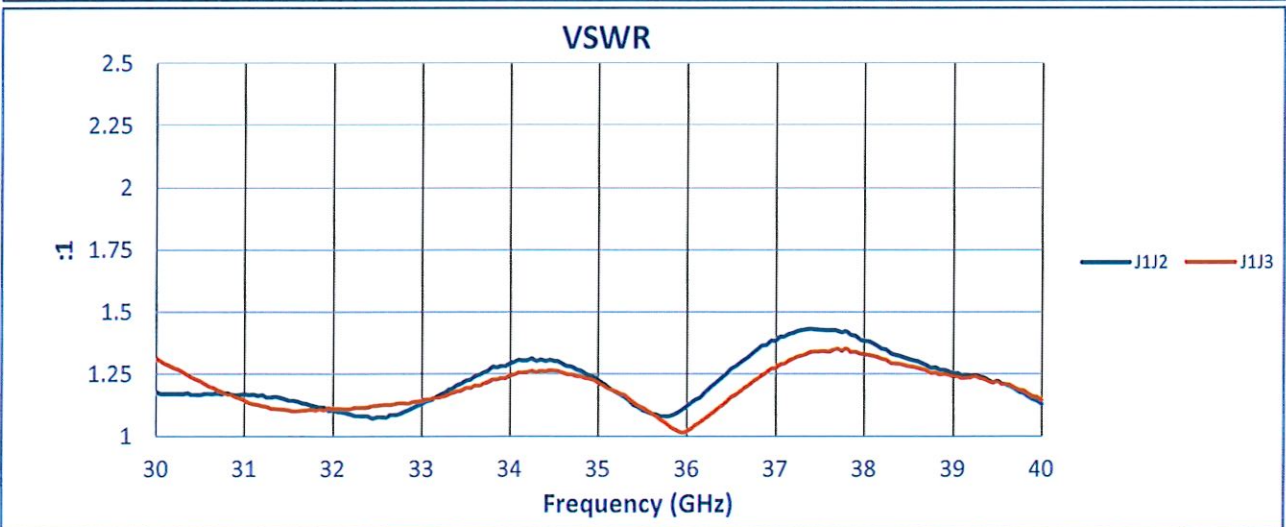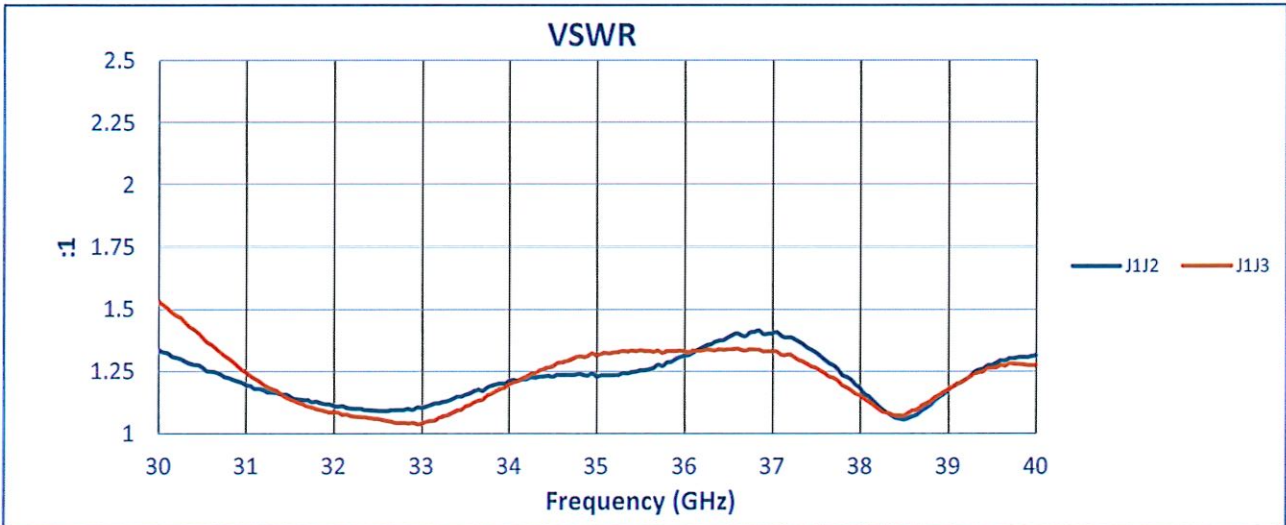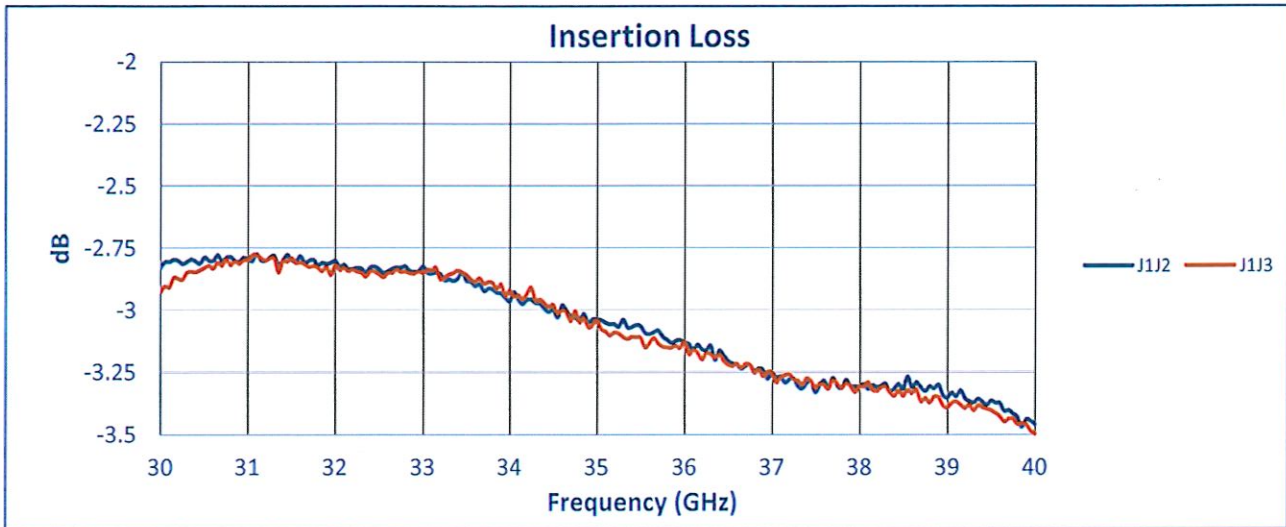

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com

