



**SUMMARY TEST DATA  
ON  
BPF-3D96G-65M-SFF**

Customer: \_\_\_\_\_  
SO No: \_\_\_\_\_  
Model No: **BPF-3D96G-65M-SFF**  
Serial No: **PL45556/2416**

Tested by: **M.Laulis**  
Temperature: **25°C**  
Date: **4/11/2024**  
Drawing No: **27648260** Rev: **A1**




TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS
			25°C
1	Passband Frequency Range	3.9275 GHz to 3.9925 GHz	<b>3.9275 GHz to 3.9925 GHz</b>
2	Insertion Loss	1.4 dB Max.	<b>0.76 dB</b>
3	VSWR	1.4 dB Max.	<b>1.1:1</b>
4	Center Frequency	3.96 GHz	<b>3.96 GHz</b>
5	Rejection	40 dBc Min., DC to 3.8 GHz	<b>50 dBc</b>
6	Input Power	20 Watts MAX	<b>20 W</b>

QA/QC Approval: \_\_\_\_\_

Date: \_\_\_\_\_






**SUMMARY TEST DATA  
ON  
BPF-3D96G-65M-SFF**

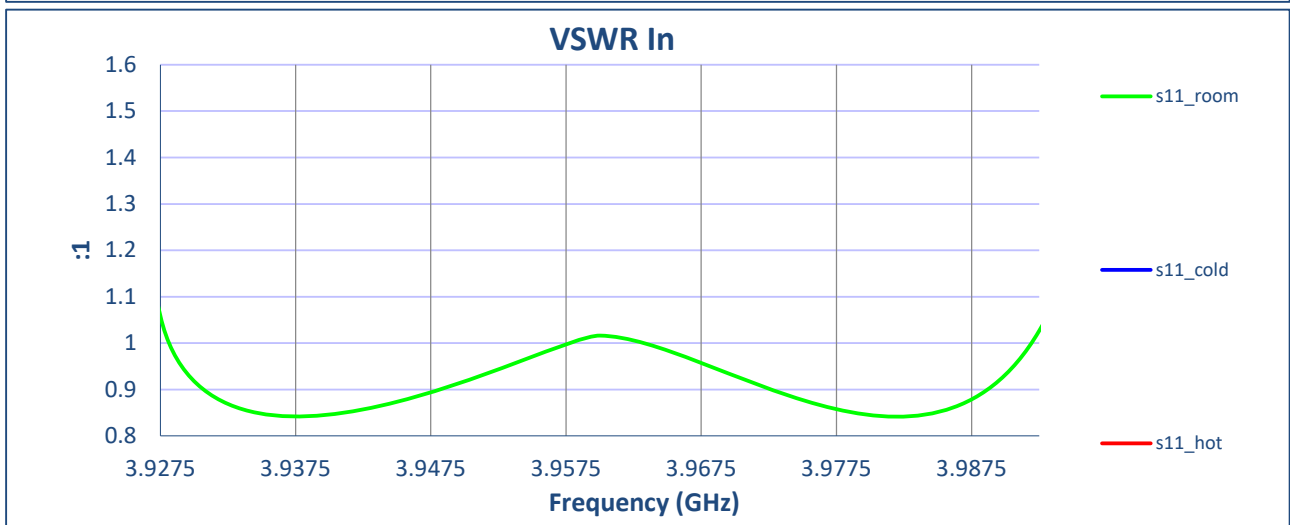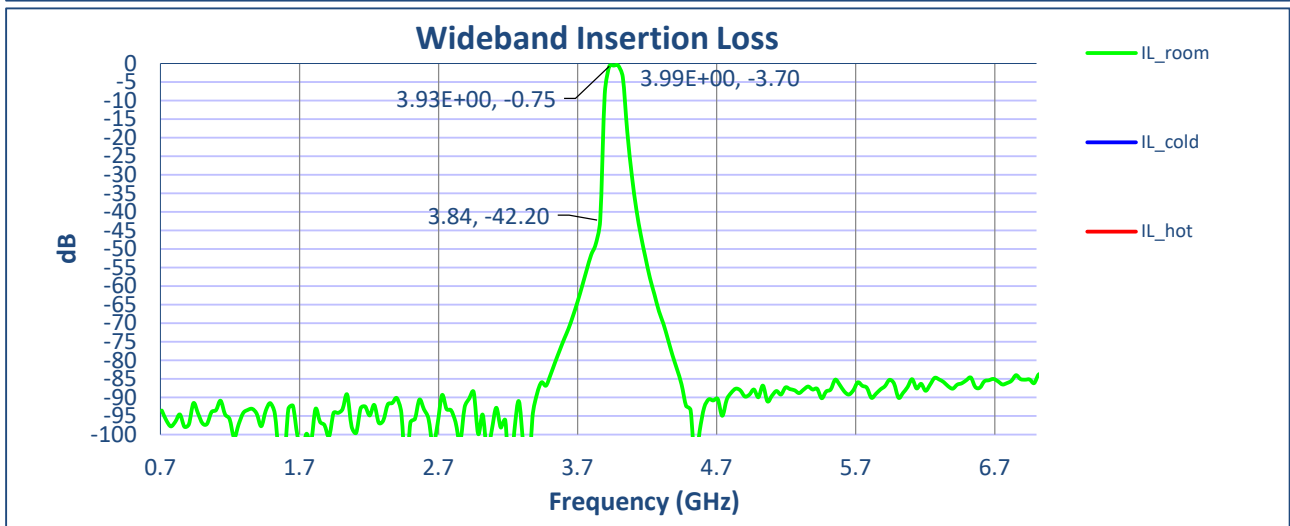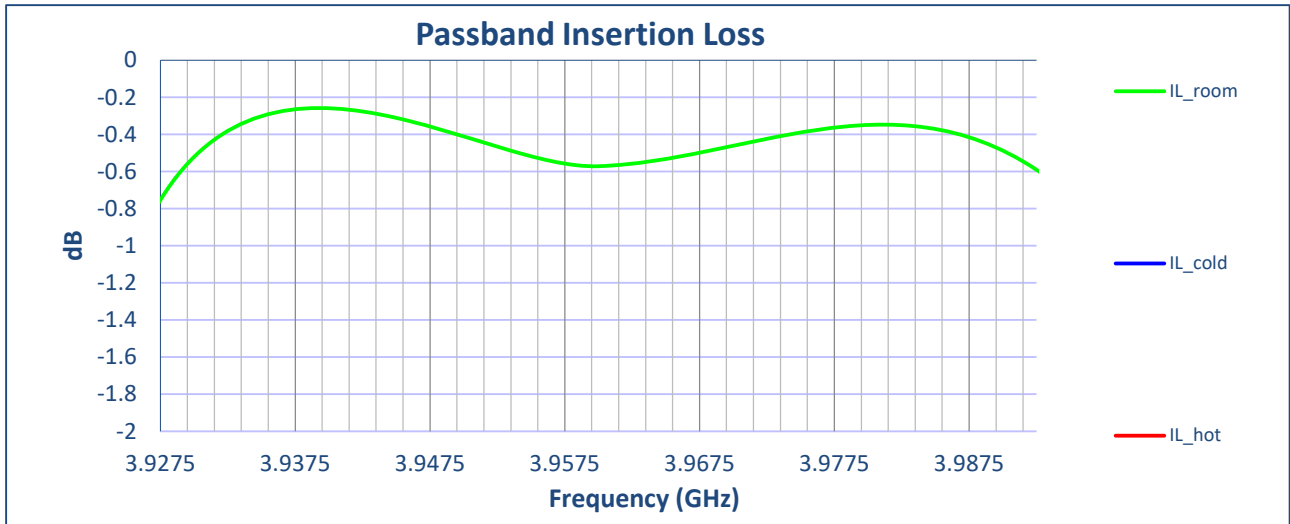

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@quanticpmi.com

**SUMMARY TEST DATA  
ON  
BPF-3D96G-65M-SFF**

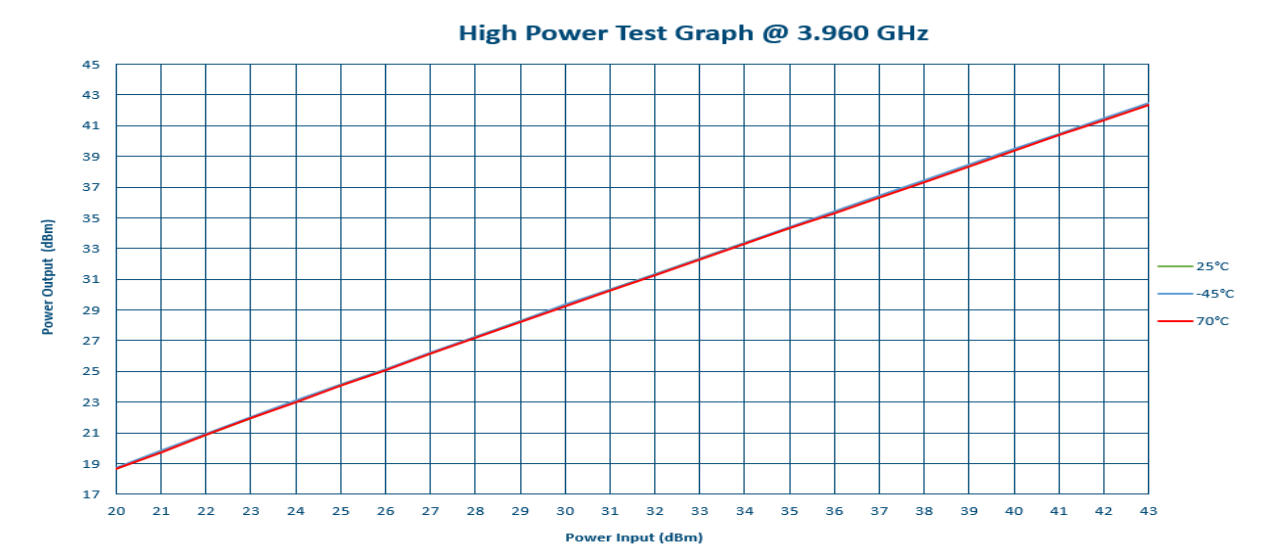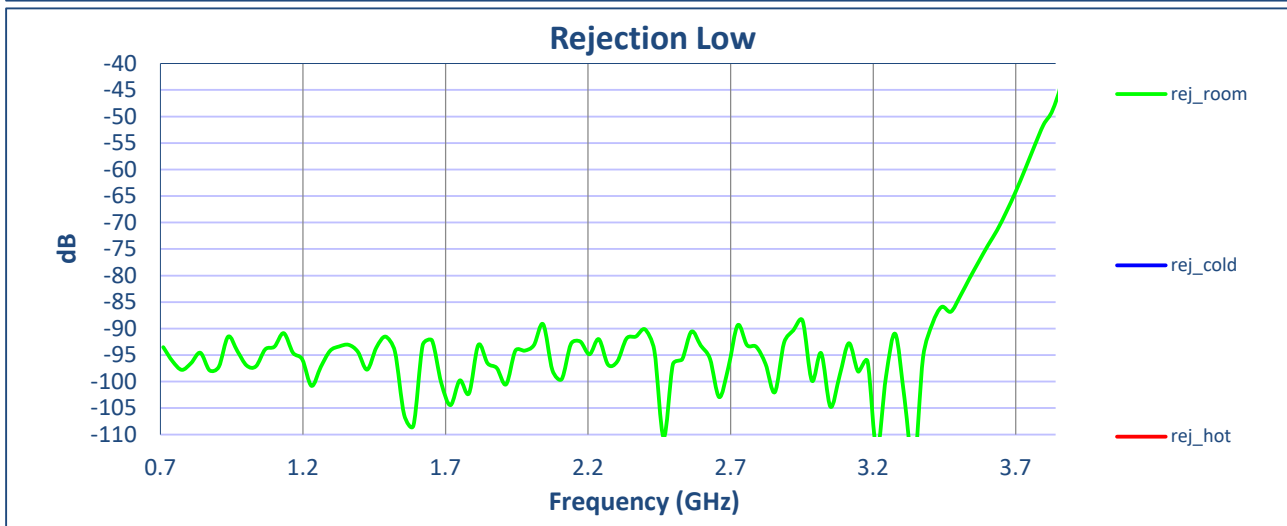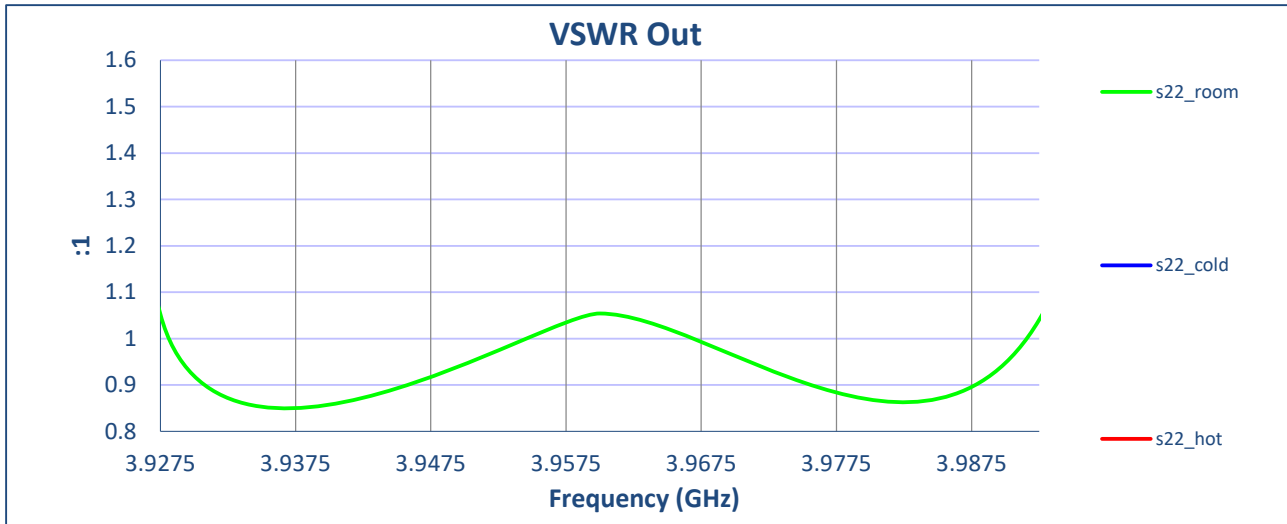

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@quanticpmi.com