



**SUMMARY TEST DATA
ON
BPF-3D96G-65M-SFF**

Customer: _____
 SO No: _____
 Model No: **BPF-3D96G-65M-SFF**
 Serial No: **PL45557/2416**




Tested by: **M.Laulis**
 Temperature: **25°C**
 Date: **4/11/2024**
 Drawing No: **27648260** Rev: **A1**

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
			25°C	
1	Passband Frequency Range	3.9275 GHz to 3.9925 GHz	3.9275 GHz to 3.9925 GHz	
2	Insertion Loss	1.4 dB Max.	0.81 dB	
3	VSWR	1.4 dB Max.	1.09:1	
4	Center Frequency	3.96 GHz	3.96 GHz	
5	Rejection	40 dBc Min., DC to 3.8 GHz	45 dBc	
6	Input Power	20 Watts MAX	20 W	

QA/QC Approval: _____




Date: _____

**SUMMARY TEST DATA
ON
BPF-3D96G-65M-SFF**

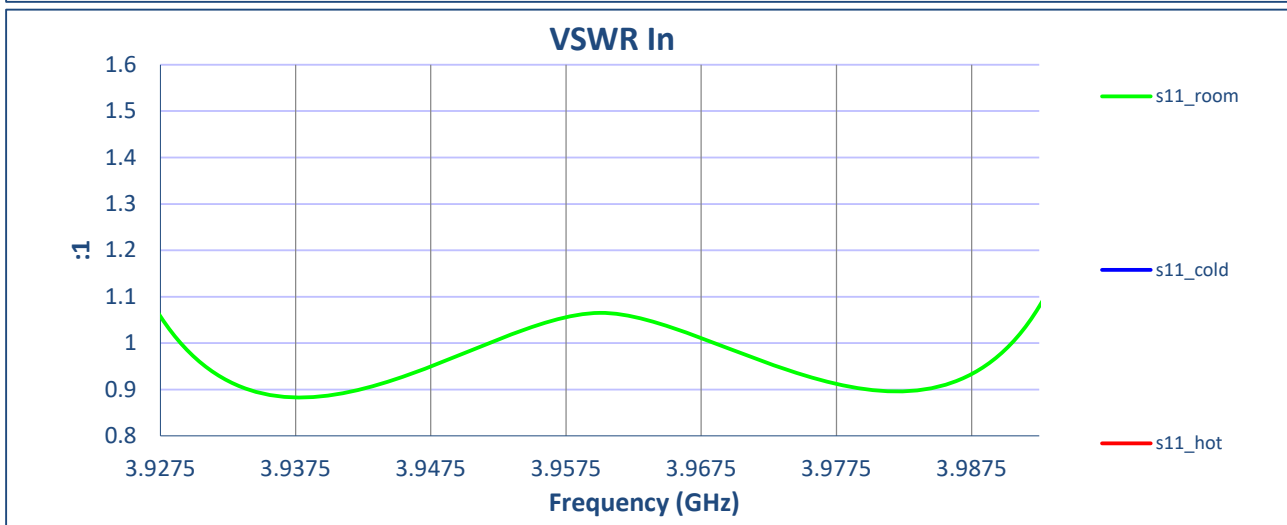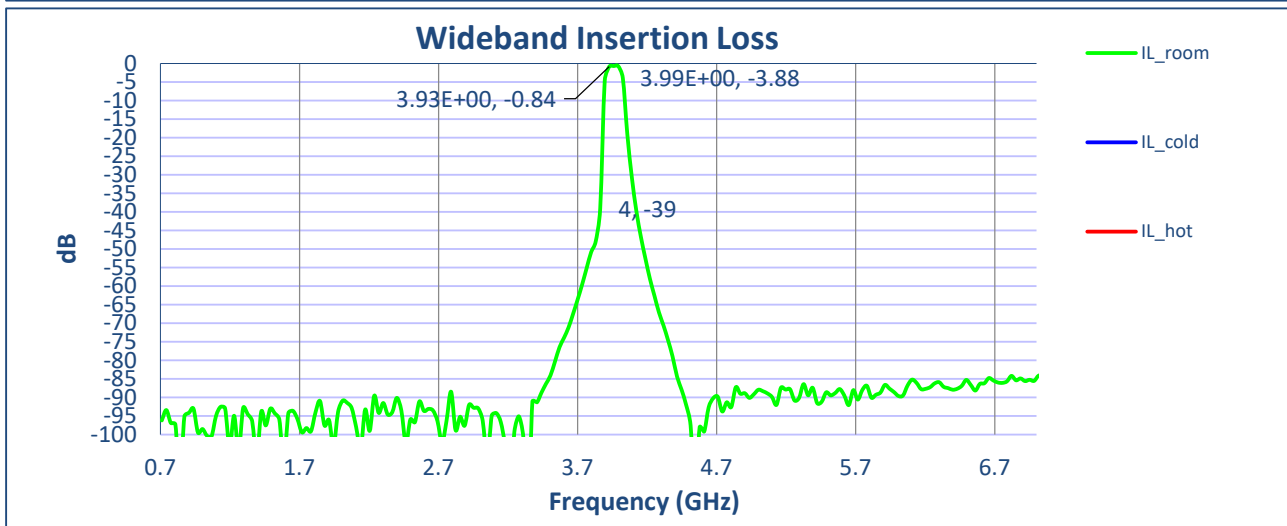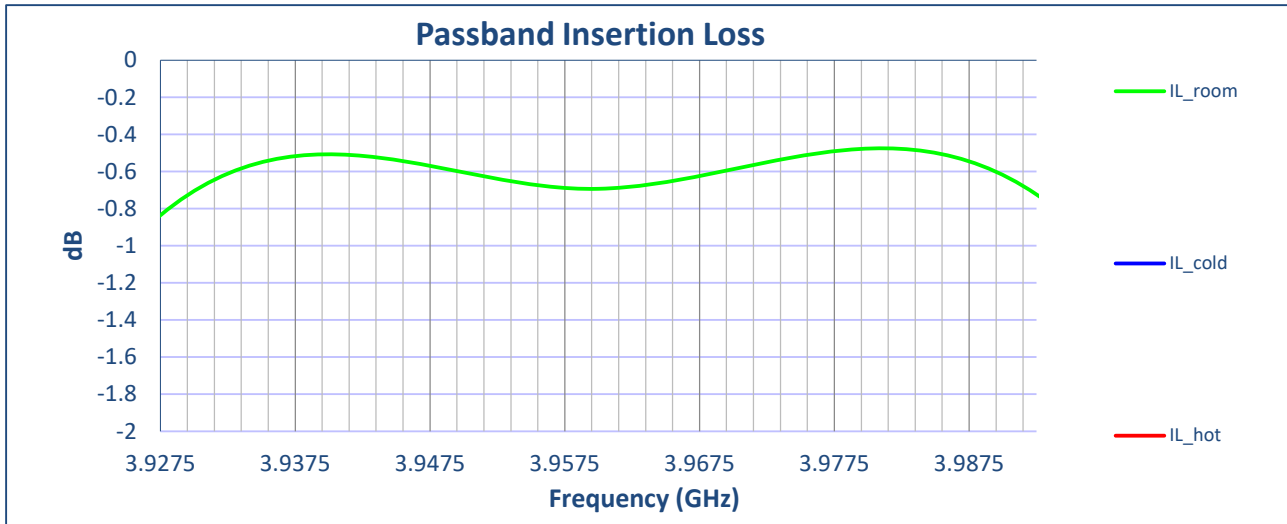

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com

**SUMMARY TEST DATA
ON
BPF-3D96G-65M-SFF**

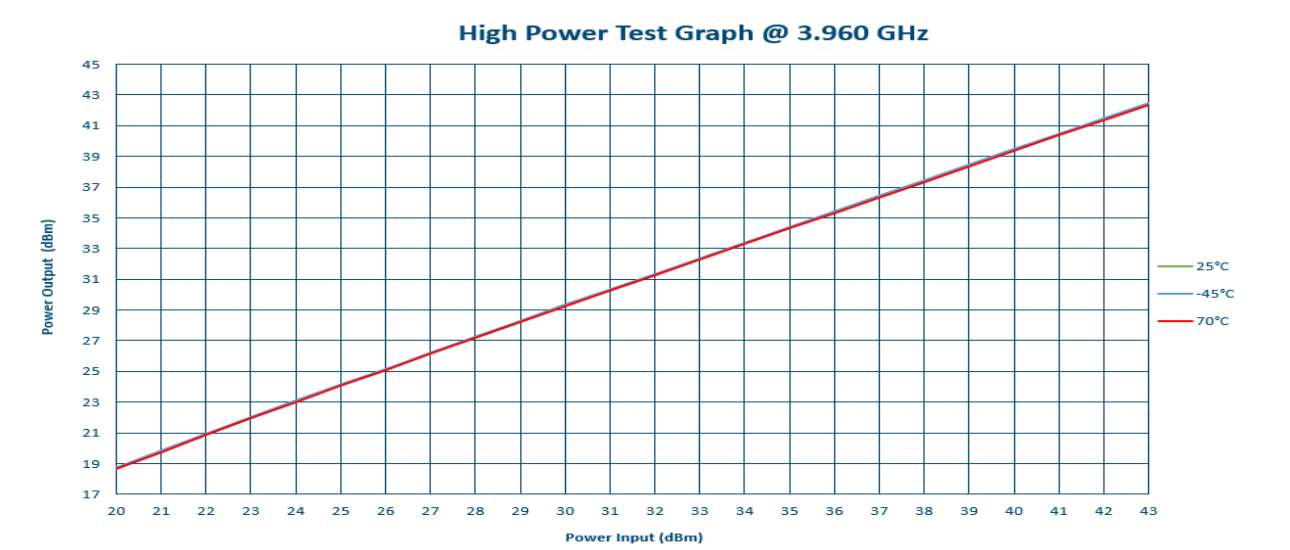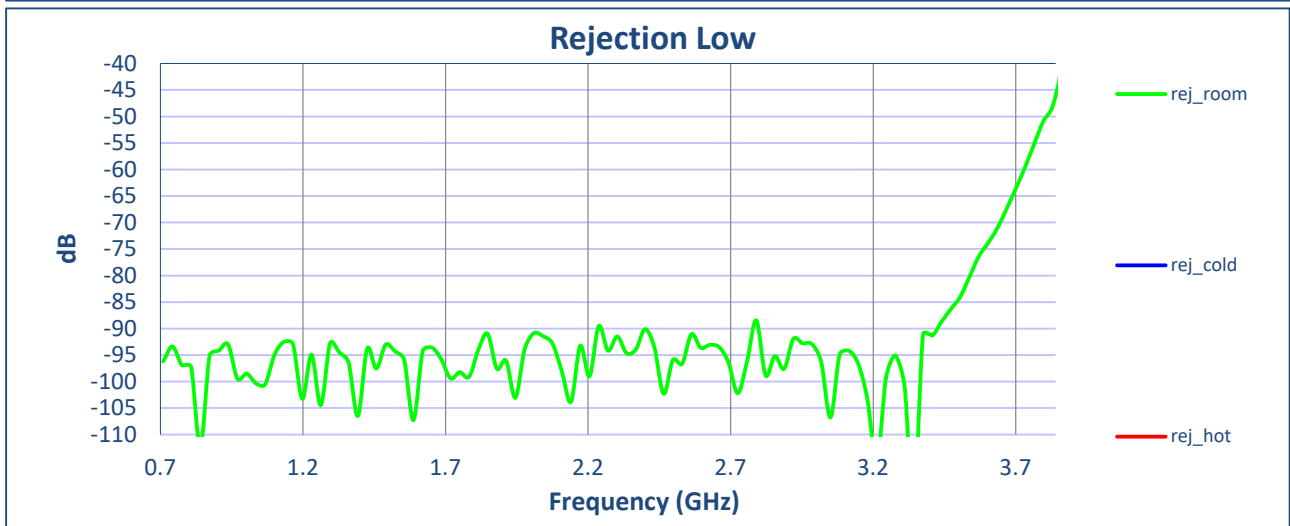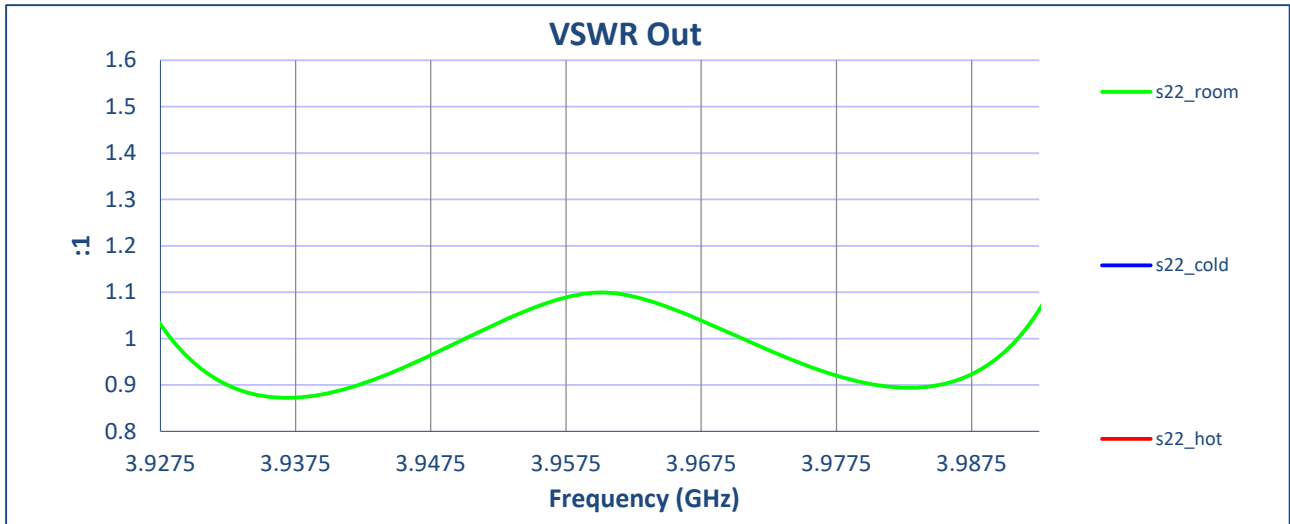

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com